

pure LIGHTING
EXCITEMENT



NEW PRODUCTS 2016

DJ & Mobile | Club Install | Production Events | Band & Stage | Party



www.adj.eu

VOLUME 16.1



VIZI HYBRID I6RX™

Code: 1237000131



VIZI BEAM 5RX™

Code: 1237000119



Product Video




Product Video

Light Source: Philips® Platinum 16R discharge, 8,000° K
Hybrid Moving Head : Beam, Spot and Wash

- Beam Angle 3-32 degree
- Prism Morphing
- Frost filter
- 19 DMX channels
- 14 colors + white / 2 Separate Gobo Wheels: Wheel 1: 17 static, fixed gobos + spot / Wheel 2: 12 Colored Glass Gobos + spot.
- Pan: 360-degree standard (540-degree optional) / Tilt: 270-degree
- Independent gobo and color wheels / Gobo Shake effect for both wheels
- Shutter: Pulse effect; random strobe slow to fast / Electronic Dimming: 0% 100%
- Stepper motors with micro stepping
- Power consumption: 537W
- 3/5-pin XLR In/Out
- Multi-voltage Operation: 100-240V, 50Hz/60Hz
- Dimensions (LxWxH): 394x325x522mm / 23" x 13.5" x 15.5"
- Weight: 23 kg. / 51 lbs

Photometric

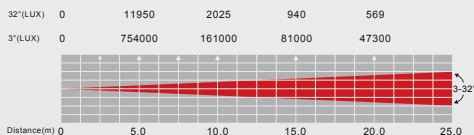

- 2 DMX Channel Modes: 16 or 19 DMX channels
- Gobo scroll mode
- LED DMX 4-Button menu system
- 5-degree beam angle
- Auto X-Y repositioning
- 14 colors + white, CTB + UV and Split Colors
- 17 static, fixed gobos + spot
- 8-facet Prism with macros
- Gobo Shake effect
- Gobo size: 6 mm viewable gobo size
- Independent gobo and color wheels
- Pan: 540-degree
- Tilt: 270—degree
- Motorized focus
- Shutter: Pulse effect; random strobe slow to fast
- electronic Dimming: 0% 100%
- Strobe effect
- Frost Filter
- Stepper motors with micro stepping
- Omega Quicklook Brackets included
- 3-pin XLR In/Out
- LUX: 770000 @ 5M, 220000 @ 10M
- Lumens: 8000 LUX
- Powercon in/out
- Multi-voltage Operation: 100-240V, 50Hz/60Hz
- Lamp: Philips® Platinum 5R discharge, 8,000° K – 3,000 hr. long life
- Dimensions (LxWxH): 394x325x522mm
- Weight: 19 kg.




ASTEROID 1200™

Code: 1237000136



XS 600™

Code: 1237000130

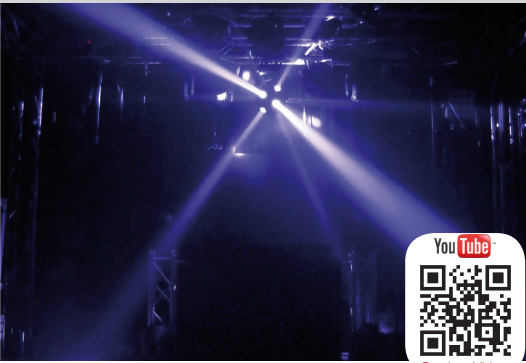


- Light Source: 12 X 15W RGBW (Red, Green, Blue, White) 4-IN-1 LED Engine
- Infinite Pan and Tilt rotation in both directions
- DMX Modes: 18, 20 and 69 Channel
- 4-degree beam angle produces sharp beams of light
- Beam Angle: 4-degree Fixed, 11-degree (Field Angle)
- Pixel Mappable capability via DMX, Artnet or KlingNet
- Strobe: Electronic 1Hz-20KHz / Electronic Dimming: 0% 100%
- Pan: Infinite / Tilt: Infinite
- Power consumption: 226W Max
- Power Connections: Powercon In / Powercon Out
- DMX Connection: 3-pin and 5-pin
- Multi-voltage Operation: 100-240V, 50/60Hz
- Dimensions (LxWxH): 15.75 x 17.75 x 23.5" / 400 x 450 x 600mm
- Weight: 49 Lbs/ 22Kg

- Unique dual Axis Moving Heads with 360° continuous rotation, in both directions
- 3 Operational Modes: DMX control, Show Mode, & Sound Active
- 2 DMX Channel modes: 25 Channels & 31 Channels
- 6 x 10W 4-in-1 RGBW LEDs
- Pixel control of each LED
- Beam Angle: 5 Degree / 360° continuous rotation, in both directions
- Power consumption: 60W
- 3-pin XLR DMX connectors
- I.E.C. In & Out to Daisy chain Power (Connect up to 8 Fixtures)
- Multi-voltage Operation: AC 100-240V 50/60Hz I.E.C. In
- Dimensions (LxWxH): 7" x 7.75" x 12.5" / 180.2 x 195.6 x 317.7mm
- Weight: 7 lbs. / 3 kgs.


Photometric

R	13024	2836	1288	691	433	
G	22173	3111	1976	1103	694	
B	3318	700	294	157	100	(LUX)
WW	30095	5736	2406	1342	822	
RGBWW	39749	9056	3649	1957	1193	

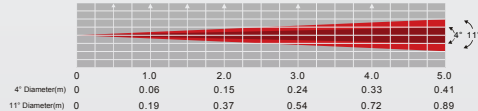

Photometric

R	11300	5782	2581	1455	848
G	17100	5272	2093	1120	672
B	29900	7653	2713	1379	774
W	15500	5331	2229	1242	740





ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



XS 400™

Code: 1237000129



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



XS 200™

Code: 1237000128



Product Video




Product Video

- Unique dual Axis Moving Heads with 360° continuous rotation, in both directions
- 3 Operational Modes: DMX control, Show Mode, & Sound Active
- 2 DMX Channel modes: 16 Channels & 18 Channels
- 4 x 10W 4-in-1 RGBW LEDs
- Pixel control of each LED
- Beam Angle: 5 Degree / 360° continuous rotation, in both directions
- Power consumption: 40W total
- 3-pin XLR DMX connectors
- I.E.C. In & Out to Daisy chain Power (Connect up to 8 Fixtures)
- Multi-voltage Operation: AC 100-240V 50/60Hz.I.E.C. In
- Dimensions (LxWxH):
4.75" x 6.75" x 11.25" / 123.6 x 169.9 x 284.5mm
- 2.5 lbs. / 6 kgs.

- Single Axis Moving Head with 360° continuous rotation, in both directions
- 3 Operational Modes: DMX control, Show Mode, & Sound Active
- 2 DMX Channel modes: 16 Channels & 18 Channels
- 2 x 10W 4-in-1 RGBW LEDs
- Pixel control of each LED
- Beam Angle: 5 Degree / 360° continuous rotation, in both directions
- Power consumption: 20W total
- 3-pin XLR DMX connectors
- I.E.C. In & Out to Daisy chain Power (Connect up to 8 Fixtures)
- Multi-voltage Operation: AC 100-240V 50/60Hz.I.E.C. In
- Dimensions (LxWxH):
4.75" x 5.5" x 11.25" / 123.4 x 100 x 284.5mm
- Weight: 2 lbs. / 4 kg

Photometric

R	11300	5782	2581	1455	848
G	17100	5272	2093	1120	672
B	29900	7653	2713	1379	774
W	15500	5331	2229	1242	740



Photometric

R	11300	5782	2581	1455	848
G	17100	5272	2093	1120	672
B	29900	7653	2713	1379	774
W	15500	5331	2229	1242	740





ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible

WARLOCK™

Code: 1237000111



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible

INNO POCKET FUSION™

Code: 1237000110



Product Video



Product Video

The ADJ Warlock is a unique, compact moonflower effect featuring a barrel mirrored scanner and a Philips® Platinum MSD 2R discharge lamp. It also features 12 Gobos + Spot, 12 Colors + White, and a built-in secondary rotation mirror, creating stunning 360-degree lighting effects.

The eco-friendly, 132-watt Philips® Platinum 2R boasts an output comparable to a 300-watt discharge fixture, plus a 6,000 hour life with a maximum power draw of 202W.

- Compact Barrel Mirrored Scanner with a bright Philips® Platinum MSD 2R source
- 3 Operational Modes: DMX control, Show Mode, & Sound Active
- 8 DMX Channels
- 6 Built-in Programs
- 12 colors + white w/ Split Colors
- 12 Fixed Gobo Patterns + Spot & Gobo Shake
- Reflector Rotation Mirror produces a 360-degree rotation
- Independent gobo and color wheels
- Gobo scroll mode
- Beam Angle: 28 Degrees
- 180° pan / 360° tilt continuous barrel rotation
- Shutter: Strobe & Pulse effect; random strobe slow to fast
- Electronic Dimming: 0% 100%
- Stepper motors with micro stepping
- Power consumption: 202W
- Multi-voltage Operation: 100-240V, 50Hz/60Hz
- Dimensions (LxWxH): 512 x 516 x 354mm
- Weight: / 10kg

The Pocket Series revolution continues with another compact, light weight lighting fixture, the Inno Pocket Fusion.

- 12-Watt LED DMX Barrel Mirrored Scanner + Green Laser (2-FX-1)
- 7 colors + white, split colors
- 4.9mW green laser diode
- 3 Operational modes: DMX, Sound Active & Internal Show control modes
- 8 DMX channels
- 12 built-in shows
- Beam Angle: 5-degrees
- X/Y mirror movement
- Stepper motors with micro stepping
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Shutter: Pulse effect; random strobe slow to fast
- Dimming: 0% 100%
- Pan/Tilt Inversion Mode
- IEC AC IN/OUT on rear to daisy chain power (up to 19 Inno Pocket Fusions @ 120V and 35 Inno Pocket Fusion @ 230V)
- Optional IR wireless remote control: Full On, Stand by, Strobe, Color Change, Laser On/off, Dimming, Sound Active On/Off (ADJ UC IR Not Included)
- LED Source: 12W White LED source (Rated at approximately 50,000 hrs)
- Dimensions (LxWxH): 340 x 132 x 177mm
- Weight: 3.4 kg



AIRSTREAM IR

Sold in a set of 4 adapters for 4 iOS devices

AIRSTREAM IR™

Code: 1226100319

*IPAD NOT INCLUDED

DMX OVER WLAN




Airstream Bridge DMX™

Code: 1226100318



Product Video

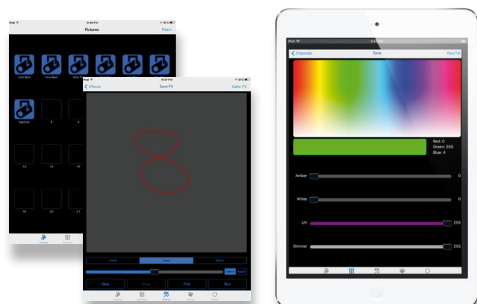

*IPAD NOT INCLUDED

The Next Generation of Lighting Control. Airstream IR is an IR adapter that plugs into the phone output of any iPad/iPhone to control a variety of ADJ lighting fixtures. Sold in a set of 4 adapters. Requires Airstream IR app (free download in the Apple App store).

- Set of 4 IR adapters for iOS devices
- Easy Control of fixtures
- Wireless infrared signal! (No Cables!)
- Download the Airstream IR App for free in the Apple App Store
- When using the App and IR adapter, make sure headphone volume is turned all the way up
- iPhone or iPad sold separately

WIRELESS CONTROL UP TO 6 METERS:
 Sound Active | Black Out (Stand by) | Full On | Fade / GOBO / Pattern | Dimmer | Strobe | Color Change | Show Selection | Strobe | Speed | Auto Fast/Slow | R/G/B | Random

Currently compatible with:

- | | |
|------------------------------|---------------------------|
| Chameleon QBar | Micro Gobo II |
| Dual Gem Pulse IR | Monster Duo |
| Encore Profile RGBW (and WW) | Monster Fun |
| Gobo Projector IR | Monster Quad |
| H2O IR and H2O DMX IR | ON-X |
| Ikon IR and Ikon Profile | PAR Z4 |
| Inno Pocket Beam Q4 | PinPoint Gobo |
| Inno Pocket Fusion | Pirspot LED QUAD DMX |
| Inno Pocket Roll | Quad Phase HP |
| Inno Pocket Scan | Revo 4 IR |
| Inno Pocket Spot | Ricochet |
| Inno Pocket Spot Pearl | RotoBeam 4 |
| Inno Pocket Spot Twins | Super Spot LED |
| Inno Pocket Wash | VF Snow Flurry HO |
| Inno Pocket Z4 | Warlock |
| KAOS | XS 200, XS 400 and XS 600 |
| Micro Galaxian II | |

More compatible products coming soon!

Allows to control Wireless WiFi and DMX-512 fixtures with iOS devices via the Airstream DMX iOS App

- Built-in WLAN Router and WiFi wireless DMX Transmitter
- Compatible with all ADJ WiFi and Elation Efy products
- WiFi wireless signal indicator on side panel
- Magnetic bottom plate for temporary, quick and easy mounting to metal fixtures or objects. Quick lock bracket included.
- Up to 2500 feet/760m (open line of sight) when using other "EXR Extended Range" WiFi products
- One transmitter can send to many receivers using the same radio channel
- Receivers automatically listen for transmitters (no pairing required)
- 14 WiFi Channels
- 3-pin DMX Out
- Wireless Frequency: 2.4 GHz DSSS
- Power Supply: DC 9-12V
- Dimensions (LxWxH): 125 x 175 x 62mm
- Weight: 0.5 kg.



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



INNO POCKET Z4™

Code: 1237000121



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



KAOS™

Code: 1237000112



YouTube™



Product Video



YouTube™



Product Video

The Inno Pocket Z4 is a mini ZOOM Moving Head that creates beautiful washes of color with its motorized 10-60-degree beam angle. Its compact size and lightweight makes it ideal for mobile entertainers, small club and bars, roller rinks, bowling centers, churches or any mobile production.

- High output mini Moving Head with 4 bright 10W Quad RGBW LED sources
- 3 Operational modes: DMX Control, Sound Active Mode & Show Mode
- 3 DMX Channel Modes: 16/19/22
- 4 Built-in shows
- Stand Alone Set Up or Master-Slave Configuration
- Motorized Zoom: 10-60 degrees
- Beam Angle: 10-60 degrees
- 540° pan / 180° tilt (8-bit & 16-bit)
- Pan /Tilt Inversion mode
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Shutter: Pulse effect; random strobe slow to fast
- Dimming: 0% 100%
- Linkable: DMX via 3-pin XLR cable
- Optional ADJ UC IR wireless remote control (ADJ UC IR or Airstream IR sold separately)
- Multi-voltage Operation: AC 100 240V, 50/60Hz
- LED Source: 4 x 10W 4-in-1 RGBW LED source (Rated at approximately 50,000 hrs)
- Dimensions (LxWxH): 141 x 174 x 247mm
- Weight: 3.2 kg

The ADJ KAOS creates exciting lighting effects with its quick sweeping beams and its 3 x 3-Zone LED chasing, pulsing and strobing LEDs. This unique fixture features 9 x 10-Watt bright, RGBW CREE LEDs with a narrow 5 degree beam angle, 5 DMX Channel Modes (2/6/15/23/45) and a 4-button LCD DMX menu. Unique lighting fixture with quick sweeping narrow beams combined with an 3 x 3-Zone LED chase

- 9 x 10-Watt RGBW Cree LEDs
- 4-Button DMX LED Display
- 3 Operational modes: DMX controller, Master/Slave & Sound Active
- 5 DMX Channel Modes: 2/6/15/23/45
- DMX-512 Protocol
- Electronic Dimming: 0 100%
- Includes exciting sound activate built-in programs
- LED pulse & strobe effect
- 60-150 degree tilt from smooth Stepper Motors
- Extremely Long Life (50,000 hr. rated)
- Beam angle: 5 Degrees
- Runs extremely cool! NO Duty Cycles! – Run all night!
- Includes Omega quick lock brackets
- Mount on a wall, trussing, or set on the ground
- Optional ADJ UC IR wireless remote control (ADJ UC IR or Airstream IR sold separately)
- PowerCon AC IN/OUT on rear to daisy chain power (up to 5 @ 120V and 9 @ 230V)
- Power Consumption: 140W maximum
- Multi-voltage operation: AC 100-240V 50/60Hz Powercon
- Dimensions (LxWxH): 458 x 423 x 186mm
- Weight: 10.6 kg



ADJ UC IR
(Sold Separately)



ADJ UC IR
(Sold Separately)



ADJ LED RC4
(Sold Separately)



AIRSTREAM IR
compatible



ON-X™

Code: 1237000124



AIRSTREAM IR
compatible



CHAMELEON QBAR™

Code: 1226200053




- Unique lighting fixture with quick sweeping narrow beams combined with an 8-Zone LED chase
- 8 x 3-Watt LEDs (2 x Red, 2 x Green, 2 x Blue, & 2 x White)
- 4-Button DMX LED Display
- 3 Operational modes: Show Mode, Sound Active Mode, & DMX Controlled
- 6 DMX Channel Modes: 2/9/11/12/16/18
- DMX-512 Protocol
- Electronic Dimming: 0 100%
- Includes exciting sound activate built-in programs
- LED pulse & strobe effect
- 270 degree tilt from smooth Stepper Motors
- Extremely Long Life (50,000 hr. rated)
- Beam angle: 4-degrees
- Runs extremely cool! NO Duty Cycles! – Run all night!
- Includes mounting bracket to mount on a wall or set on the ground
- Safety loop on side panel
- Very low power consumption connect more units in a single circuit
- IEC AC IN/OUT on rear to daisy chain power (up to 17 fixture's @ 120V and 26 fixture's @ 230V)
- Compatible with ADJ UC IR Remote (sold Separately)
- Power Consumption: 39W maximum
- Multi-voltage operation: AC 100-240V 50/60Hz/IEC socket
- Dimensions (LxWxH): 283 x 151 x 110mm
- Weight: 2.5 kg.

- 4 x 18W RGBWA+UV (6-in-1) LEDs
- Creates 4 beams from 4 lenses with offset colors
- 63 Static Colors
- 6 Operating Modes: RGBWA+UV Dimmer Mode, Built-In Program Mode (19 Programs)
- Auto Run Mode, Static Color Mode, Sound Active Mode, & DMX Control
- LED pulse & strobe effect / Electronic Dimming: 0 100%
- 15 degree beam angle
- DMX512 Protocol 3-pin XLR In/Out
- IEC in/out to Daisy Chain Power (Connect up to 6 fixtures max.)
- Power Consumption: 90W
- Multi-voltage Operation: 100-240V, 50Hz/60Hz
- Dimensions (LxWxH): 360x90x225mm / 14.25" x 3.5" x 8.75"
- Weight: 8 lbs. / 2.6 kg.



Photometric

	R	D15	580	89.5	40.1	17.5	11.7	
G	D15	299	57.1	24.8	13.2	8.7		
B	D15	394	105.4	47.1	18.1	11.6		
W	D15	470	114.2	55.7	29.4	19.2		
A	D15	120.8	28.2	11.8	6.8	4.1		
UV	D15	62.6	21.9	10.4	5.3	3		
(Beam Area)	D15	1163	196	97.3	53.6	33.4		






ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



RICOCHET™

Code: 1237000122



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



REVO 4 IR™

Code: 1222400089



Product Video



Product Video

- Hybrid LED Laser Simulator – Produces sharp rays of light that simulate a laser effect and beam effect.
- 2 DMX Channel Modes: 10 & 13 DMX Channels
- 3 Operation Modes: Sound Active, Show Mode, or DMX Control
- Stand Alone Set Up or Master-Slave Set Up
- 6 Show Modes
- 10 Colors with Split Colors
- 29 Pattern Macros
- Pattern Zoom & Rotation
- 2.5 Degree Beam Angle
- Linkable via 3-pin XLR cable
- 4-button DMX display on rear panel
- Strobing
- DMX-512 Protocol
- Electronic Dimming: 0-100%
- Runs extremely cool! NO Duty Cycles! Run all night!
- IEC AC IN/OUT on rear to daisy chain power
- Safety Loop on top panel
- Power Draw: 34W Max (Full On)
- Multi Voltage: 100V~240V, 50/60Hz
- Power Cord Daisy Chain (Up to 20 Fixture @ 120V and Up to 35 Fixtures @ 230V)
- Long life LEDs (Rated at approximately 50,000 hours)
- Compatible with ADJ UC-IR Remote and Airstream IR (sold Separately)
- IEC AC IN/OUT
- Light Source: 1 x 20W LumiEngin LED
- Dimensions (L x W x H): 285x250x248mm
- Weight: 5kg.

- LED DMX-512 Moonflower from the popular REVO Series with 256 razor sharp Red, Green, Blue & White Beams
- Produces unique and exciting LED patterns that may be projected on a wall, ceiling or dance floor – great with or without fog
- 256 total 5mm LEDs: 64 Red, 64 Green, 64 blue and 64 White
- 2 DMX Channel Modes (4 Channel mode or 256 Channel mode)
- 4-Button LED DMX Display
- Linkable via XLR connections
- Wide beam spread covers a large area
- 3 operation modes: DMX, Sound Active & Master/Slave
- Sound active from built-in programs
- Strobe function
- Beam angle: 35 degrees
- Runs extremely cool! NO Duty Cycles! – Run all night!
- Includes hanging bracket & safety loop
- Power Consumption: 34W maximum
- Extreme long lifetime of the LEDs (50,000 hr. rating)
- Compatible with ADJ UC IR Remote and Airstream IR (sold Separately)
- IEC AC IN/OUT on rear to daisy chain power (up to 12 fixture's @ 120V and 21 fixture's @ 230V)
- Multi-voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 12.25" x 12" x 13.25" / 312 x 306 x 334 mm
- Weight: 11 lbs. / 4.9 kgs.



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



GOBO PROJECTOR IR™

Code: 1221500026



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



IKON IR™

Code: 1221500027



- Bright white 12W LED indoor Gobo Projector High quality optics
- Clear powerful output
- FX Switch on rear panel for static or slow rotation of gobo
- Includes 4 replaceable gobo patterns (3 metal; 1 glass)
- Gobo size: 26.8mm; Viewable size: 24mm
- Run all night – No Duty Cycle
- Easy Gobo replacement access
- Manual focus
- Ideal for Mobile DJs, Clubs, Bars, Retail Stores and Promotional Events
- Great for projection lighting where fog can't be used
- Project on ceilings, walls and floors
- Very low heat output
- Beam Angle: 13 degrees
- Long Life LED: 30,000 hrs
- Lux @ 3M: 540 Lux
- Compact light weight design
- Includes hanging bracket and safety hook
- ADJ UC IR Compatible (Sold Separately)
- Switchable Voltage: 120V/60Hz or 230V/50Hz (IEC type plug)
- Power consumption: 12W max
- Dimensions (LxWxH): 217 x 206 x 121mm
- Weight: 3 kg.

- Bright white 60W LED indoor Gobo Projector
- High quality optics Clear powerful output
- Adjustable dimmer and rotate knob on rear panel
- Includes 4 replaceable metal Gobo patterns
- Gobo size: 54mm; Viewable size: 40mm
- Run all night – No Duty Cycle
- Easy Gobo replacement access
- Manual focus
- Ideal for Mobile DJs, Clubs, Bars, Retail Stores and Promotional Events
- Very low heat output
- Beam Angle: 25, 32 or 43 degrees (Includes 3 different lenses)
- Long life LED (Rated at approximately 50,000 hrs.)
- IEC AC outlet on side to daisy chain power (up to 9 Ikon IR's @ 120V and 17 Ikon IR's @ 230V)
- Color Temperature: 7500K
- Includes yoke to mount on a wall or hang from trussing
- Includes UC IR Remote Control
- Multi-voltage: 100-240V, 50/60Hz Power consumption: 74W max
- Dimensions (LxWxH): 236 x 236 x 215mm
- Weight: 3 kg.



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



H2O IR™

Code: 1221500023



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible




H2O DMX IR™

Code: 1221500025



Product Video



Product Video

- Bright 12W LED simulated water flowing effect
- Designed to project on walls, ceilings or floors with or without fog great for mood or background lighting
- Equipped with 2 glass effect wheels and 1 independent dichroic color wheel
- 5 colors: Orange, Green, Blue, Yellow, Purple + White & Split Colors
- High-tech plastic molded ends protect unit during transport and day-to-day use
- Manual focusing lens
- 2 operational modes: seamless scrolling colors or single color operation
- Beam angle: 34 or 43 degrees (optional)
- Includes hanging bracket
- Run all night – units stays cool – no duty cycle
- ADJ UC IR Compatible (sold separately)
- Power consumption: 23.8W
- Long life 12W LED (30,000 hr. rating)
- Switchable voltage: 120V/60Hz or 230V/50Hz (IEC Plug)
- Dimensions (LxWxH): 9.25" x 9" x 7.25" / 236 x 229 x 187mm
- Weight: 7.7 lbs. / 3.5 kg.

- Bright 80W LED source simulated water flowing effect
- Designed to project on walls, ceilings or floors with or without fog great for mood or background lighting
- 3 DMX Channels (Dimming, Glass Wheel, Colors)
- 3 operation modes: Show Mode, Manual Mode, & DMX Control
- Stand Alone Set Up or Master-Slave Set Up
- Digital DMX Display with 4-button menu for easy navigation
- Equipped with 2 glass effect wheels and 1 independent dichroic color wheel
- 5 colors + White & Split Colors
- High-tech plastic molded ends protect unit during transport and day-to-day use
- 0-100% Dimming (via DMX)
- Manual focusing lens
- Beam angle: 37 degrees or 27 degrees (optional)
- Includes hanging bracket
- Run all night – units stays cool – no duty cycle
- IEC In & Out to Daisy chain Power (Connect up to 10 Fixtures @ 120V & 17 Fixtures @ -230V)
- ADJ UC IR Compatible (sold separately)
- Fan cooled
- Safety hook on rear panel
- Power consumption: 70W
- Long life 80W LED Source (30,000 hr. rating)
- Multi-voltage operation: AC 120-240V 50/60Hz (IEC Plug)
- Dimensions (LxWxH): 301 x 232 x 207mm
- Weight: 4 kg.

Please note: This laser effect is for DJ and home use, not intended for commercial use.



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



DUAL GEM PULSE IR™

Code: 1222300022



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible




GALAXIAN GEM IR™

Code: 1222300023



Product Video

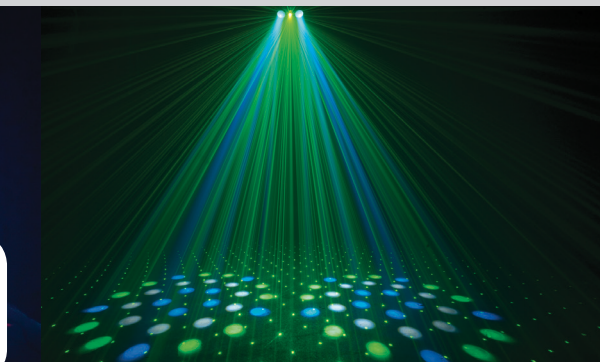

- LED Dual Lens Moonflower with sharp Red, Green & Blue high output colored beams + LED Strobe in one light
- LEDs: 32 Red, 30 Green, 30 Blue, 45 White (strobe)
- On/Off Switch to control strobe effect
- Produces LED patterns that can be projected on a dance floor or wall
- Wide beam spread covers a large area
- Beam Angle: 32 degrees
- Sound activate beams from built-in programs
- Rich, saturated colors that will not fade
- Very low power consumption
- No moving parts
- Runs extremely cool! NO Duty Cycles! – Run all night!
- Razor sharp beams
- Extreme long lifetime of the LEDs (50,000 hr. rating)
- IEC In & Out to Daisy chain Power (Connect up to 34 Fixtures @ 120V & 50 Fixtures @ 230V)
- ADJ UC IR wireless remote and Airstream IR App compatible (Sold Separately)
- Includes hanging bracket
- Power Consumption: 11W maximum
- Voltage: 100-240V, 50/60Hz (IEC plug)
- Dimensions (LxWxH): 10" x 11" x 7" / 254x278x177mm
- Weight: 8 lbs. / 3.5 kgs.

- 2-FX-IN-1: LED Dual Lens Moonflower with sharp Red, Green, Blue & White high output colored beams + "Galaxian style" effect with 100's of green beams
- 46 x 5mm RGBW LEDs: 16 Red, 10 Green, 10 Blue & 10 White
- 5 DMX Channels
- 4-Button menu system LED Display making it easy to navigate
- 3 Operational modes: DMX controller, Master/Slave & Sound Active
- Includes exciting sound activate built-in programs
- Rich, saturated colors that will not fade
- LED Strobe effect
- Runs extremely cool! NO Duty Cycles! – Run all night!
- Razor sharp beams
- Extreme long lifetime of the LEDs (50,000 hr. rating)
- Laser uses 1.8 degree Stepper motor with micro stepping for precision movement
- Includes hanging bracket
- Safety hook on rear panel
- Power On/Off switch on rear panel
- IEC AC IN/OUT on rear to daisy chain power (up to 16 units)
- Compatible with AIRSTREAM IR and ADJ UC-IR remote (sold separately)
- Power Consumption: 20W maximum
- Multi-voltage operation: AC 100V~240V 50/60Hz/IEC socket
- Dimensions (LxWxH): 290x325x201mm
- Weight: 3.7 kg



UC LASER IR remote included



AIRSTREAM IR compatible



MICRO GALAXIAN II™

Code: 1223200041



UC LASER IR remote included



AIRSTREAM IR compatible



MICRO GOBO II™

Code: 1237000127



Product Video



Product Video

- Produces more than 200 green and red laser beams that can be projected on a ceiling, wall or dance floor
- Compact case design
- 2 operational modes: Auto Mode (built-in programs), or Sound Active Mode
- Built-in programs can be changed with a push of a button on the unit or from an infrared remote
- Includes dual hanging bracket
- Complies with FDA standards
- Fan cooled
- Power consumption: 9W max
- Green Laser: 30mW (532nm) Green laser
- Red Laser: 80mW (650nm) Red laser
- Includes UL Listed multi-voltage power supply: AC 100-240V, 50/60Hz
- UC Laser IR Included [Auto Fast and Slow/Sound Control; Black Out; Color Change (R, G, R+G, Random); Rotation Control (Clockwise/Counter-Clockwise/Random)]
- Compatible with Airstream IR iOS App (sold separately)
- Dimensions (LxWxH): 130 x 172x 130mm
- Weight: 0,6 kg.

Please note: This laser effect is for DJ and home use, not intended for commercial use.

- Produces more than 200 green and red laser beams with gobo patterns that can be projected on a ceiling, wall or dance floor
- 8 Gobo patterns,
- compact case design
- 3 operational modes: Fast Auto Show, Slow Auto Show, or Sound Active Mode
- Built-in programs can be changed with a push of a button on the unit or from the UC Laser IR
- Includes dual hanging bracket
- Complies with FDA standards
- Fan cooled Power consumption: 9W max
- Green Laser: 30mW (532nm) Green laser
- Red Laser: 80mW (650nm) Red laser
- Includes UL Listed multi-voltage power supply: AC 100-240V, 50/60Hz
- Includes UC Laser IR [Fast Auto Show, Slow Auto Show/Sound Control; Black Out; Color Change (R, G, R+G, Random); Gobo Control]Compatible with Airstream IR iOS App (sold separately)
- Dimensions (LxWxH): 130 x 172 x 130mm
- Weight: 0,6 kg.

Please note: This laser effect is for DJ and home use, not intended for commercial use.



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



PINPOINT GOBO COLOR™

Code: 1212200024



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



PINPOINT GOBO CW™

Code: 1212200023



Product Video



Product Video


- 10W RGBA 4-in1 LED Pinspot
- Rechargeable battery powered
- Includes Frost Filter
- 17-33 degree beam
- Includes Power Adapter (DC 8.7V 1A)
- Power Consumption: 11W
- Battery Charge Time: 5 Hours (With POWER switch off)
- Battery Life: 5 Hours (Full On) / 18 Hours (In Energy Saving Mode w/ Full Charge)
- Dimensions (LxWxH): 9.75" x 4" x 2.75" / 245 x 102 x 70mm
- Weight: 3 lbs. / 1.1 kgs.

- Rechargeable battery powered, bright 10W CW LED Pinspot with 17-33-degree beam
- Compact high-tech plastic case design
- Long-life LED: 50,000 hour LED life
- Power consumption: 11W
- Includes magnetic bracket for easy quick install on metal
- X-CLIP Bracket for drop ceiling frame mounting
- 4 Gobos + 5 Color Filters
- Replaceable Gobos
- Includes Frost Filter
- Rechargeable battery included in fixture
- Includes Power Adapter (DC 8.7V 1A)
- Compatible with ADJ UC IR Remote and Airstream IR iOS App (Sold Separately)
- Battery Charge Time: 5 Hours (With POWER switch off)
- Battery Life: 4 Hours (Full On)
- 12.5 Hours (In Energy Saving Mode w/ Full Charge)
- Dimensions (LxWxH): 245 x 102 x 70mm
- Weight: 1.1 kg




Photometric

R	D17	1677	162.7	74.1	39.4	25.7
G	D17	718	192.9	78.9	43.7	28.4
B	D17	916	205	85.3	53.1	32.8
A	D17	232	64.8	29.5	15.5	10.2
RGBA	D17	1770	431	195.4	110.8	68.2



CW	D17	3130	876	323	203	127.7
----	-----	------	-----	-----	-----	-------





ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



PAR Z4

Code: 1226200050



ADJ RFC
(Sold Separately)



Includes lens kit to
change to 40-degrees or
50-degrees beam angle



COB CANNON WASH PEARL™™

Code: 1223200042



- High output Mini-Par with manual zoom
- 4 x 15W Quad RGBW LED source
- 5 Operational modes: DMX Control, Sound Active Mode, Show Mode, Static Color Mode, Color Fade Mode.
- 4 DMX Channel Modes: 4/6/8/9
- 63 Color Macros
- Stand Alone Set Up or Master-Slave Configuration
- Beam Angle: 10 60-degrees
- Full ZOOM 10-60 Degrees
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Shutter: Pulse effect; random strobe slow to fast
- Dimming: 0% 100%
- Display Inversion Mode
- Linkable: DMX via 3-pin XLR cable
- Compatible with ADJ UC IR wireless remote control (sold separately) and Airstream IR iOS App
- Airstream IR dongle included
- Power consumption: 52W (Full-On)
- IEC AC input and output on rear to daisy chain power (Up to 13 fixture's @ 120V & 24 fixture's @ 230V)
- Multi-voltage Operation: AC 100 240V, 50/60Hz
- LED Source: 4 x 15W 4-in-1 RGBW LED source (Rated at approximately 50,000 hrs)
- Dimensions (LxWxH): 263 x 185 x 221mm (With Bracket)
- Dimensions (LxWxH): 263 x 185 x 118mm (Without Bracket)
- Weight: 2.5 kgs


- One Quad (4-IN-1) RGBA COB LED
- Light Source: 1x 150-Watt COB Quad LED (RGBA: 4-IN-1)
- White exterior casing
- 64 built-in color macros
- 7 DMX Channel modes (3,4,5,6,7,9,10 Ch.)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Includes lens kit to change to 40° or 50° beam angle
- 3-pin XLR chassis mount connectors for DMX linking
- LED pulse and strobe effect / Electronic Dimming: 0 100%
- IEC AC IN/OUT to daisy chain power (up to 5 fixtures)
- Dimensions (LxWxH): 16.25"x9.75"x7.5" / 415x245x192mm
- Weight: 9 lbs. / 4.1 kg.

Photometric

Beam Angle (°)	0.4375	0.875	1.75	2.625	3.50	4.375
R	10550	2530	611	283	168	111
G	8490	1869	511	226	130	91
B	8540	1950	545	242	135	95
A	3110	997	253	113.8	61.1	39.1
RGBA	25900	7320	1970	810	474	297

Beam Angle (°)	0.53	1.06	2.12	3.18	4.24	5.30
R	5780	1475	393	170.8	98.5	65.4
G	4760	1360	335	154.4	90.5	58.8
B	4800	1454	372	172.8	95.4	64.9
A	2480	892	191	85.4	48.8	31.4
RGBA	24300	5240	1472	681	373	240

Beam Angle (°)	1.01	2.02	4.04	6.06	8.08	10.1
R	3900	975	247	112.5	66.3	44.7
G	3650	853	219	103.8	60.5	39.1
B	3650	926	246	110.4	65.9	42.5
A	2350	689	159.3	67.9	37.2	25.1
RGBA	12380	3590	966	540	238	155.9





ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



ENCORE PROFILE WW™

Code: 1237000134



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



ENCORE PROFILE RGBW™

Code: 1237000135



Product Video



Product Video

- 1 x 100W Warm White COB LED source
- Manual focusing
- Manual Iris
- Manual Framing Shutters
- 4 Gobos
- 4 Operating Modes: Dimmer Mode, Color Fade Mode, Sound Active Mode, & DMX Controlled
- Strobing / 0-100% Dimming Control / 5 Dimmer Modes
- 12°-30° Beam angle
- 3 and 5 Pin DMX IN/OUT
- PowerCon In and Out
- I.E.C. In & Out to Daisy chain Power (Connect up to 5 Fixtures)
- Power Consumption: 120W maximum
- Multi-voltage operation: AC 100-240V 50/60Hz (non switchable)
- Dimensions (LxWxH): 22" x 9.75" x 12.25" / 560 x 250 x 385mm
- Weight: 19 lbs. / 8.5 kg

- Pro Ellipsoidal with a 100W High Powered RGBW 4-in-1 COB LED source
- 7 Operating Modes: RGBW Dimmer Mode, Color Change Mode, Color Fade Mode, Auto Run Mode, Static Color Mode, Sound Active Mode, & DMX Controlled
- Stand Alone Setup or Master-Slave Setup
- 5 DMX Channel Modes: 4/5/6/10/11
- 64 Static Colors | 4 Gobos | Strobing
- 5 Dimmer Modes | 0-100% Dimming Control
- Typical Throw: 40 meter (12°) to 28 meter (30°)
- Manual focusing | Manual Iris | Manual Framing Shutters
- UC IR & Airstream IR Compatible (sold Separately)
- Dimensions (LxWxH): 22" x 9.75" x 12.25" / 560 x 250 x 385mm
- Weight: 19 lbs. / 8.5 kg.



RGBW Color Mixing:

Photometric

	0.5m	1m	2m	3m	4m	5m	Distance (m)
12°	0.11	0.22	0.44	0.66	0.88	1.10	(LUX)
WW	94800	30700	5970	2640	1514	958	(LUX)
30°	0.25	0.50	1.00	1.50	2.00	2.50	(LUX)
WW	39600	6760	1346	640	345	209	(LUX)

Photometric

	0.5m	1m	2m	3m	4m	5m	Distance (m)
12°	0.11	0.22	0.44	0.66	0.88	1.10	(LUX)
R	26100	7640	1898	807	452	289	(LUX)
G	21200	6230	1398	600	318	201	(LUX)
B	22400	6340	1611	729	392	246	(LUX)
A	9460	2900	773	338	186.3	111.5	(LUX)
RGBWA	81000	24000	4940	1822	1056	636	(LUX)
30°	0.25	0.50	1.00	1.50	2.00	2.50	(LUX)
R	3660	1824	470	197.1	116	68.7	(LUX)
G	4500	2202	344	147.1	77.3	50.4	(LUX)
B	5240	1426	402	177.6	93.9	59.4	(LUX)
A	2580	667	185	80.6	42.4	25.7	(LUX)
RGBWA	20200	4570	1160	506	288	175.3	(LUX)





Dotz Par RF remote
(included)



UV FLOOD 36

Code: 1226200049



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



IKON PROFILE™

Code: 1221500028




- 12 x 3W UV LEDs (Rated at approximately 50,000 hours)
- 3 Operational Modes: Sound Active, Dimmer Mode, and DMX Controlled
- Beam Angle: 57-Degrees
- Wavelength: 395-400nm
- 3 DMX Modes: 1/2/3
- 3-Pin DMX In / Out DMX Connections
- Electronic Dimming 0-100%
- Strobe Effect
- Strobe Rate: Adjustable
- Sound Active: Yes
- Compatible with the Dotz Par RF (included)
- Power Connection: IEC AC In/Out
- Input Voltage: AC 100V-240V 50/60Hz
- Power Consumption: 35W (Full on)
- Power Link26 @ 120V / 57 @ 240V
- Dimensions: 300 x 235 x 115mm
- Weight: 2.2 kg

- Bright white 32W LED indoor GOBO Projector
- High quality optics - Clear powerful output
- 4 DMX Channels | 5 Dimmer Curves
- Beam Angle: 15-30 degrees
- Manual adjustable Beam Angle and Focus
- Manual Framing Shutters
- Includes 1 textured glass GOBO
- Gobo size: 28mm;
- Drop-in GOBO Slot for Metal or Glass Gobos
- Color Frame for Color Filters or Color Correction Filters
- Run all night - No Duty Cycle
- Very low heat output
- Long life LED (Rated at approximately 50,000 hrs.)
- IEC AC outlet on side to daisy chain power (up to 16 Ikon Profile's @ 120V and 27 Ikon Profile's @ 230V)
- Includes yoke to mount on a wall or hang from trussing
- Includes UC IR Remote Control
- Multi-voltage: 100-240V, 50/60Hz
- Dimensions (LxWxH): 16" x 6" x 9" / 408 x 150 x 226mm
- Weight: 6 lbs. / 2.7 kg.

PHOTOMETRIC

(LxW) 15°	35200	8930	3790	2120	1280
(LxW) 30°	9500	2360	985	583	374



Extended wireless range: 760m



Extended wireless range: 760m



WIFLY EXR QA5 IP

Code: 1226100292

WIFLY EXR HEX5 IP

Code: 1226100293

IP65

WIFLY


BATTERY POWERED



IP65

WIFLY

BATTERY POWERED

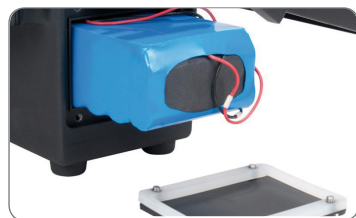

- Rechargeable Lithium battery powered, with wireless DMX
- IP65, Outdoor Rated, par fixture with 5 x 5W Quad RGBA LEDs (4-in-1 Red, Green, Blue & Amber LEDs)
- Built-in WIFLY wireless DMX: compatible with ADJ's WIFLY and WiFly EXR Transceivers (sold separately)
- Variable RGBA color mixing offers a smooth, seemingly unlimited color palette Great for Stage or Wall Washing!
- Creates no RGBA shadows
- Compatible with ADJ RFC wireless remote control (sold separately)
- 5 DMX Channel modes: 4, 5, 6, 10 or 11 channel modes
- 6 Operational modes: Static Color; RGBA Dimmer Mode; Color Change; Color Fade; Auto Run (Program Run); and DMX Controlled
- 16 Color Change Modes | 16 Color Fade Modes
- 64 built-in Color Macros
- LED pulse and strobe effect
- Flicker Free Operation
- Electronic Dimming: 0-100%
- Beam angle: 25-degree
- Linkable via 3-pin IP cable (In/Out)
- 4-button DMX menu display on rear panel
- Dual bracket yoke allows fixture to be hung or set on the ground
- 4-Pin Power AC IN/OUT outlets on rear to daisy chain power (up to 11 units)
- xWxH: 12.25" x 11" x 7.5" / 310 x 280 x 194mm
- Weight: 12 lbs. / 5.48 kg.

- Rechargeable Lithium battery powered, with wireless DMX
- IP65, Outdoor Rated, par fixture with 5x10W Hex RGBWA + UV LEDs (6inLEDs)
- Built-in WIFLY wireless DMX: compatible with ADJ's WIFLY and WiFly EXR Transceivers (sold separately)
- Variable RGBWA+UV color mixing offers a smooth, seemingly unlimited color palette Great for Stage or Wall Washing!
- Compatible with ADJ RFC wireless remote control (sold separately)
- 5 DMX Channel modes: 6, 7, 8, 11 or 12 channel modes
- 6 Operational modes: Static Color; RGBWA+UV Dimmer Mode; Color Change; Color Fade; Auto Run (Program Run); and DMX Controlled
- 16 Color Change Modes | 16 Color Fade Modes
- 64 built-in Color Macros
- LED pulse and strobe effect
- Flicker Free Operation
- Electronic Dimming: 0-100%
- Beam angle: 40-degree
- LED Source: 5x 10-Watt Hex LEDs (6-in-1 RGBWA+UVRed, Green, Blue, White, Amber, & UV LEDs, rated at approximately 50,000 hrs)
- Battery Charge Time: 5 Hours (With Power Switch Off)
- Battery Life: 5 Hours Full On, 8 Hours in Energy Save Mode
- Energy Saving Mode
- Power Draw: 56W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 310 x 280 x 194mm
- Weight: 5.48 kg.

Extended
wireless
range:
760mADJ RFC
(Sold Separately)**WIFLY EXR QA12BAR IP**

Code: 1226100294

Extended
wireless
range:
760m**WIFLY EXR BATTERY**


Code: 1226100295



Product Video

The WIFLY EXR QA12BAR IP is a 1-meter LED linear fixture made of robust metal and is IP65 outdoor rated. It features wireless DMX transmission up to 2,500 ft./760m.

- Light Source: IP65, Outdoor Rated, par fixture with 12x 5-Watt QUAD LEDs (4-in-1 RGBARed, Green, Blue & Amber LEDs, rated at approximately 50,000 hrs)
- 4-button DMX Menu display on rear
- Built-in WIFLY wireless DMX: compatible with ADJ's WIFLY and WIFLY EXR Transceivers (sold separately)
- Extended wireless range up to 2000 ft.
- Creates no RGBA shadows / 64 built-in Color Macros
- Compatible with ADJ RFC wireless remote control (sold separately)
- Modes: Color Change; Color Jumping; Color Dreaming; Auto (Program Run); Sound Active, WIFLY and DMX Controlled
- DMX Channel modes: 4, 6, 7, 8, 9, 12 and 14
- Beam angle: 25-degree / Linkable via 3-pin IP cable (In/Out)
- Total power consumption: 75W / Multi-voltage operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 1029 x 140 x 152 mm
- Weight: 6.4 kg.

**BATTERY
POWERED**

A true wireless solution! The ADJ WIFLY EXR Battery is a battery powered wireless DMX transceiver (transmitter/receiver in one) that is compatible with all ADJ WIFLY products. After connecting the WIFLY EXR Battery transceiver to a DMX Controller users can send a constant and reliable wireless DMX signal up to 2,500feet/760m to other ADJ WIFLY products.

- Battery powered wireless DMX transceiver (transmitter/receiver in one)
- Battery Life: Up to 20 hours
- Battery life and WIFLY wireless signal strength indicators on side panel
- Magnetic bottom plate for temporary, quick and easy mounting to metal fixtures or objects
- Compatible with all ADJ WIFLY products
- Up to 2,500 wireless feet/760m (open line of sight)
- One transmitter can send to many receivers using the same radio channel
- Receivers automatically listen for transmitters (no pairing required)
- Supports up to 15 DMX-512 universes
- Dip Switches to select from 15 different radio channels (one DMX universe per channel)
- 3-pin & 5-pin DMX In/Out
- Wireless Frequency: 2.4 GHz DSSS
- Power Supply: DC 9-12V (AC or DC powered)
- Dimensions 148 x 135 x 62mm
- Weight: 0.75 kg.

Extended wireless range: 760m

BATTERY POWERED



Wifly EXR Dotz Par™

Code: 1223200040



LED RC2
(Sold Separately)



MEGA TRIPAR PROFILE PLUS

Code: 1226100298



Product Video



Product Video

- Rechargeable Lithium battery powered, with wireless DMX
- Extended range wireless DMX: Up to 2,500 feet (760M) when used with ADJ's WIFLY EXR Battery Transceiver
- Built-in WIFLY wireless DMX: compatible with ADJ's Wifly and Wifly EXR Transceivers (sold separately)
- Shield included helps limit unwanted light exposure
- Variable RGB color mixing offers a smooth, seemingly unlimited color palette Great for Stage or Wall Washing!
- Creates no RGB shadows
- Compatible with ADJ Dotz Par RF wireless remote control (sold separately)
- 5 DMX Channel modes: 3/4/5/5/9 channel modes (Two 5 DMX Channel Modes)
- 7 Operational modes: Static Color; Sound Active Mode; RGB Dimmer Mode; 3 Color Change; 7 Color Change Mode; Color Fade; and DMX Controlled | 32 built-in Color Macros
- 5 Dimmer Curves: Standard, Stage, TV, Architectural, or Theatre
- LED pulse and strobe effect
- Flicker Free Operation | Electronic Dimming: 0-100%
- Beam angle: 20 Degrees (w/ Lens) 66 Degrees (w/o Lens)
- Linkable via 3-pin IEC and DMX cable (In/Out)
- 4-button DMX menu display on rear panel
- Manual Angle Adjustment of the Wifly EXR Dotz PAR for perfect uplighting position
- LED Source: 1 x 36W TRI COB LED rated at approximately
- Battery Charge Time: 4 Hours
- Battery Life: 8 Hours Full On (With Full Charge)
- Dimensions (LxWxH): 210 x 200 x 250mm
- Weight: 5.5 kg.

- Ultra bright slim flat black Par with 5 x 4-Watt, 4-IN-1 Quad LEDs
- Smooth RGB + UV Color Mixing (fast or slow color change operation)
- Unique "sit-flat" design: Power & DMX Ins/Outs intelligently designed so the unit can be set flat on the ground or set inside truss
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- 5 DMX Channel modes: 4, 5, 6, 9 or 10 channel modes
- 5 Operational modes: Auto Run Mode (16 Color Change Mode, 16 Color Fade Modes, & 1 Combined Mode), Sound Active Mode (16 Modes), RGB + UV Dimmer Mode, Static Color Mode (64 Colors), and DMX Controlled
- Digital DMX Display with 4-button menu for easy navigation
- Stand Alone or Master/Slave Configuration
- Beam Angle: 40 degrees
- 64 built-in Color Macros DMX-512 protocol
- Color strobe effect
- Linkable via 3-pin XLR cable
- Electronic Dimming: 0-100%
- Flicker Free
- Includes a scissor yoke to hang on truss, mount on a wall or set on the ground
- Long Life LEDs (50,000 hrs.)
- IEC AC input and out put on the side of the fixture to daisy chain the power cords (link up to 30 fixtures)
- Dimensions (LxWxH): 225x220x85mm
- Weight: 1.23 kg.



LED RC2
(Sold Separately)



FLAT PAR Q45XS

Code: 1226100299




LED RC2
(Sold Separately)



FLAT PAR Q412XS

Code: 1226100300

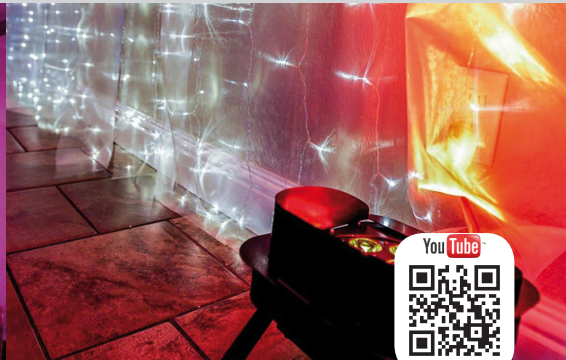

- Ultra bright slim fixture with 5x 5-Watt QUAD LEDs (4-in-1 RGBA Red, Green, Blue & Amber) with snoot
- Unique "sit flat" design Power & DMX Ins/Outs are intelligently designed so the unit can be set flat on the ground or set inside truss
- Great for performance stages where traditional par cans emit a lot of heat onto performers
- Low profile case design
- 8 DMX Channel modes: 1, 2, 3, 4, 5, 6, 7 or 8 channel modes
- 6 Operational modes: Manual Color Mode; Color Change Mode; Color Fade Mode; Auto (Program Run) Mode; Sound Active Mode and DMX-512 Mode
- Smooth RGBA color mixing (fast or slow color change operation)
- QUAD LED (4-in-1) projects no RGB shadows
- 15 built-in Color Macros
- Color strobe effect
- Electronic Dimming: 0 100%
- Beam angle: 25-degree
- Linkable via 3-pin XLR cable (In/Out)
- 4-button LED DMX display on rear panel
- Dual bracket yoke allows fixture to be hung or set on the ground
- IEC AC IN/OUT outlets on rear to daisy chain power
- Includes gel frame for optional diffusion filters
- Multi-voltage operation: AC100-240V, 50/60Hz (IEC power In/Out)
- Dimensions (LxWxH): 272x230x115mm
- Weight: 2.5 kg.

- Ultra bright slim fixture with 12x 5-Watt QUAD LEDs (4-in-1 RGBA Red, Green, Blue & Amber)
- Unique "sit flat" design – Power & DMX Ins/Outs are intelligently designed so the unit can be set flat on the ground or set inside truss
- Great for performance stages where traditional par cans emit a lot of heat onto performers
- Low profile case design
- 8 DMX Channel modes: 1, 2, 3, 4, 5, 6, 7 or 8 channel modes
- 6 Operational modes: Manual Color Mode; Color Change Mode; Color Fade Mode; Auto (Program Run) Mode; Sound Active Mode and DMX-512 Mode
- Smooth RGBA color mixing (fast or slow color change operation)
- QUAD LED (4-in-1) projects no RGB shadows
- 15 built-in Color Macros
- Color strobe effect
- Flicker Free
- Electronic Dimming: 0 100%
- Beam angle: 25-degree
- Linkable via 3-pin XLR cable (In/Out)
- 4-button LED DMX display on rear panel
- Dual bracket yoke allows fixture to be hung or set on the ground
- Includes gel frame for optional diffusion filters
- Run all night – No duty cycle
- Dimensions (LxWxH): 328x280x115mm
- Weight: 3.2 kg.





LED RC2
(Sold Separately)



FLAT PAR QWHI2XS

Code: 1226100301



LED RC2
(Sold Separately)



FLAT PAR QWH5XS

Code: 1226100302



Product Video



Ultra bright slim fixture with 12x 5-Watt QUAD LEDs (4-in-1 RGBW Red, Green, Blue & White)

- Unique "sit flat" design – Power & DMX Ins/Outs are intelligently designed so the unit can be set flat on the ground or set inside truss
- Great for performance stages where traditional par cans emit a lot of heat onto performers
- Low profile case design
- Wireless infrared remote control up to 15 ft./4.5M (Model: ADJ LED RC2 sold separately)
- 8 DMX Channel modes: 1, 2, 3, 4, 5, 6, 7 or 8 channel modes
- 6 Operational modes: Manual Color Mode; Color Change Mode; Color Fade Mode; Auto (Program Run) Mode; Sound Active Mode and DMX-512 Mode
- Smooth RGBW color mixing (fast or slow color change operation)
- QUAD LED (4-in-1) projects no RGB shadows
- 15 built-in Color Macros
- Color strobe effect
- Electronic Dimming: 0 100% | Flicker Free
- Beam angle: 25-degree
- Linkable via 3-pin XLR cable (In/Out)
- 4-button LED DMX display on rear panel
- Includes gel frame for optional diffusion filters
- Run all night – No duty cycle
- Long Life LEDs (50,000 hrs.)
- Power Draw: 80W max
- Dimensions (LxWxH): 328x280x115mm
- Weight: 3.2 kg

Ultra bright slim fixture with 5x 5-Watt QUAD LEDs (4-in-1 RGBW Red, Green, Blue & White)

- Included Snoot Frame helps limit unwanted light exposure
- Unique "sit flat" design – sideways Power & DMX Ins/Outs , intelligently designed so the unit can be set -lat on the ground or set inside truss-
- Great for performance stages where traditional par cans emit a lot of heat onto performers
- Low profile case design
- Wireless infrared remote control up to 15 ft./4.5M (Model: ADJ LED RC2 sold separately)
- 8 DMX Channel modes: 1, 2, 3, 4, 5, 6, 7 or 8 channel modes
- 6 Operational modes: Manual Color Mode; Color Change Mode; Color Fade Mode; Auto (Program Run) Mode; Sound Active Mode and DMX-512 Mode
- Smooth RGBW color mixing (fast or slow color change operation)
- QUAD LED (4-in-1) projects no RGBW shadows
- 15 built-in Color Macros | LED Pulse & strobe effect
- Electronic Dimming: 0 100% | Flicker Free
- Beam angle: 25-degree
- Linkable via 3-pin XLR cable (sideways In/Out)
- 4-button LED DMX display on rear panel
- Dual bracket yoke allows fixture to be hung or set on the ground
- Sideways IEC AC IN/OUT outlets to daisy chain power (up to 18 units)
- Includes gel frame for optional diffusion filters
- Dimensions (LxWxH): 10.75"x9"x4.5" / 272x230x115mm
- Weight: 6 lbs. / 2.5 kg.



LED RC2
(Sold Separately)



FLAT PAR TRI7XS

Code: 1226100303



LED RC2
(Sold Separately)



FLAT PAR TRI8XS

Code: 1226100310



- Ultra bright slim Par Can with 7x 3-Watt TRI LEDs with snoot
- 7 DMX Channel modes: 1, 2, 3, 4, 5, 6 or 7 channel modes
- 6 Operational modes: Manual Color Mode; Color Change Mode; Color Fade Mode; Auto (Program Run) Mode; Sound Active Mode and DMX-512 Mode
- Smooth RGB color mixing (fast or slow color change operation)
- TRI LED (3-in-1) projects no RGB shadows
- 32 built-in Color Macros | Color strobe effect
- Beam angle: 40-degree
- Linkable via 3-pin XLR cable (In/Out)
- 4-button LED DMX display on rear panel
- Includes gel frame for optional diffusion filters
- Dimensions (LxWxH): 272x230x105mm
- Weight: 2.8 kg.

- Ultra bright slim fixture with 12x 5-Watt QUAD LEDs (4-in-1 RGBA : Red, Green, Blue & Amber)
- Unique "sit flat" design – Power & DMX Ins/Outs are intelligently designed so the unit can be set flat on the ground or set inside truss
- Great for performance stages where traditional par cans emit a lot of heat onto performers
- Low profile case design
- 8 DMX Channel modes: 1, 2, 3, 4, 5, 6, 7 or 8 channel modes
- 6 Operational modes: Manual Color Mode; Color Change Mode; Color Fade Mode; Auto (Program Run) Mode; Sound Active Mode and DMX-512 Mode
- Smooth RGBA color mixing (fast or slow color change operation)
- QUAD LED (4-in-1) projects no RGBA shadows
- 15 built-in Color Macros
- Color strobe effect
- Flicker Free
- Electronic Dimming: 0-100%
- Beam angle: 25-degree
- Linkable via 3-pin XLR cable (In/Out)
- 4-button LED DMX display on rear panel
- Dual bracket yoke allows fixture to be hung or set on the ground
- Includes gel frame for optional diffusion filters

LED RC2 | Infrared Remote Control Features:



- Black Out: Turns fixture On/Off
- Auto Run: Automatically run through built-in programs
- Program Selection: Access units built-in programs
- DMX Mode Select
- Flash: Strobe effect | Speed: Control speed of Auto Run
- Sound Active: Activates sound active mode
- Slave: Designates the fixture as a "slave" fixture in the Master/Slave configuration
- Set Address: Set DMX Address on a fixture
- RGB Buttons: Adjust RGB colors with the "+" and "-" buttons
- + and - Buttons: Adjust flash rate, speed of the Auto Run and Program Selection



ADJ RFC
(included)



5P HEX PEARL™

Code: 1226100291



ADJ RFC
(included)



12P HEX™

Code: 1226100290



Product Video



Product Video

- Ultra bright, flat wash fixture with 5 x Red, Green, Blue, Amber, White & UV LED pixels
- Smooth RGBAW + UV color mixing
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- Intelligently designed, patent pending power & DMX Ins/Outs sit sideways so the unit can be set flat on the ground or set inside truss
- 4 DMX Modes: 6, 7, 8, & 12 channel
- 5 Operational modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- 7 Built-In Programs
- 63 built-in Color Macros
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect | Electronic Dimming: 0 100%
- Beam angle: 30-degree
- 4-button, DMX digital display on rear panel
- Compatible with Dotz Par RF wireless remote control (included)
- Dual yoke allows fixture to be hung or set on the ground
- Data linkable via 3-pin XLR cables
- Power linkable via IEC power cables. (8x 5P Hex's Max @ 100V, 21x 5P Hex's Max @ 240V)
- Light Source: 5 x 10-Watt RGBAW + UV LEDs, (Rated at approximately 50,000 hrs.)
- Power Draw: 60W total (All LED's @ Full On)
- Dimensions (LxWxH): 210 x 100 x 220mm
- Weight: 2 kg

- Ultra bright, flat wash fixture with 12 x Red, Green, Blue, Amber, White & UV LED pixels
- Smooth RGBAW + UV color mixing
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- Intelligently designed, patent pending power & DMX Ins/Outs sit sideways so the unit can be set flat on the ground or set inside truss
- 4 DMX Modes: 6, 7, 8, & 12 channel
- 5 Operational modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- 7 Built-In Programs
- 63 built-in Color Macros
- Flicker Free operation (No flickering on camera)
- 5 selectable Dimmer Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- Electronic Dimming: 0 100%
- Beam angle: 30-degree
- 4-button, DMX digital display on rear panel
- Compatible with Dotz Par RF wireless remote control (included)
- Dual yoke allows fixture to be hung or set on the ground
- Power linkable via IEC power cables. (6x 12P Hex's Max @ 110V, 13x 12P Hex's Max @ 240V)
- Light Source: 12x 12-Watt RGBAW + UV LEDs, (Rated at approximately 50,000 hrs.)
- Dimensions (LxWxH): 298 x 249 x 136mm
- Weight: 3.9 kg



- Usable for all Flat Pars with metal housing
*Flat Par NOT INCLUDED


MAGNA TUBE™

Code: 1222400088



WIFLY NE1

Code: 1226100296

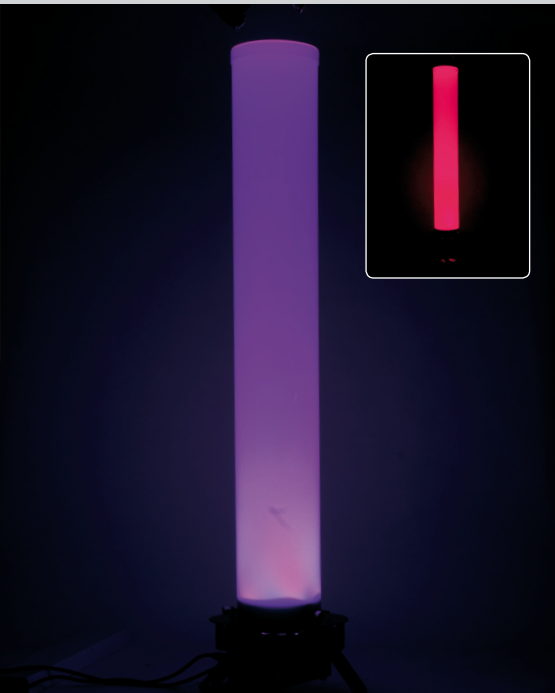


The Magma Tube is a 1m plastic tube with a metallic, magnetic filter-frame-adapter that fits almost any Flat Par with metal front-housing. The Magma Tube filterframe-adapter has 4 strong magnets that holds the Magma tube firmly to the metallic housing of a Flat Par.

- Accessory for ADJ Flat Pars
- Includes 3 foot plastic tube & magnetic metal gel frame adapter with 4 strong magnets
- Great alternative look to uplighting
- Tube Length : 1000mm
- Tube diameter : 150mm
- Magnetic Gel frame adapter dimensions (LxWxH): 204 x 204 x 44mm



Download more than 200 existing profiles from ADJ and famous competitors or create your own profiles with our "NE1 Profile Creator" software

WiFly NE1 Profile Creator (WINDOWS only)

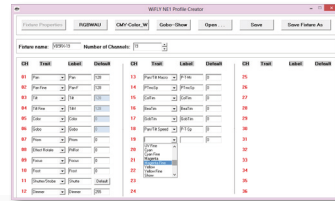

Product Video

No matter what your knowledge of DMX is, ADJ's new WIFLY NE1 controller combines a user-intuitive interface with built-in WIFLY to provide a wireless DMX solution that's revolutionary in its simplicity.

- 432 channel DMX Controller with ADJ's WIFLY Transceiver Wireless DMX on-board. (Can also be hard wired via 3 pin DMX cables)
- Designed for Inno Series and RGB, RGBW, RGBA, RGBWA and RGBWA+UV LED's but can control most DMX products that consist of 36 channels or less
- Built-in effects generator for moving lights and LED's
- Control up to 12 individual fixtures
- 12 Memories via 2 Banks
- 4 Rotary Encoders for Channel & Function Control
- Master Dimmer Fader Control
- Strobe Rate Fader Control
- 6 Mode buttons (Fixture, Color, Gobo, Effect, Show, & Pause)
- 12 Multi-Function buttons
- Blackout button
- Universal USB Port (USB Stick Included)

Tech Specs:

- DMX output connector: 3-pin XLR
- Power In: 9-12V DC min 300mA UL approved power supply (Included)
- Power consumption: 2.7 Watts
- Size: 325 x 185 x 68.7mm
- Weight: 2 kg



RGB 3C IR

Code: 1321000075



RGBW4C IR

Code: 1321000076



LED RC2
(Sold Separately)



LED RC2
(Sold Separately)



The RGB 3C IR is a basic 3-channel RGB LED controller. It was designed to control any standard 3 channel RGB fixture where channel 1 is Red, channel 2 is Green and channel 3 is Blue. All LED fixtures must be set to run in DMX mode and be addressed to DMX channel 1. It's the ideal control solution for D.J.'s, small night Clubs, and bars that want a simple LED controller to run the show.

- Compact DMX512 controller for RGB LED fixtures
- 3 Manual RGB Faders
- 9 direct access static color buttons
- Program Select Button
- 7 Static Colors in program mode
- 10 Chase Programs
- Manual RGB intensity control mode
- RGB and Auto modes
- On the fly Speed & Fade control of all chase programs
- Sound active Button
- Hold Button to Lock all buttons and Faders and pause current scene
- Strobe Fader
- Blackout button
- ADJ Remote LED RC2 Compatible (sold separately)
- Tech Specs: DMX output connector: 3-pin XLR
- Power In: 9-12V 300mA (Included)
- Power consumption: 3.6 Watts
- Size: 22 x 14 x 6.3cm
- Weight: 0.8kg


The RGBW4C IR is a 32-channel RGB, RGBW or RGBA LED controller. It was designed to control any standard 3 or 4 channel group of LED fixtures where channel 1 is Red, channel 2 is Green, channel 3 is Blue and channel 4 is White or Amber. Up to 8 LED fixtures or fixture groups can independently be controlled via four fixture buttons. All LED fixtures or fixture groups must be set to run in DMX mode and be addressed four channels apart for independent control.

- Compact DMX512 controller for RGB, RGBW and RGBA LED fixtures
- Control up to 8 individual fixtures or fixture groups
- 3 user programmable color preset, direct access buttons
- 9 Color preset/Chase program direct access buttons
- Color Macro playback mode
- Manual RGBW intensity control mode
- RGB and Auto modes
- On the fly Speed & Fade control of all chase programs
- Sound active mode via internal microphone
- Adjustable microphone sensitivity
- Variable strobe
- Blackout button
- ADJ LED RC2 Compatible (sold separately)
- DMX output connector: 3-pin XLR
- Power In: 12VDC 500mA UL approved power supply (Included)
- Power consumption: 3.6 Watts
- Size: 327 x 140 x 48mm
- Weight: 1.1kg





LED MASTER

Code: 1310000026

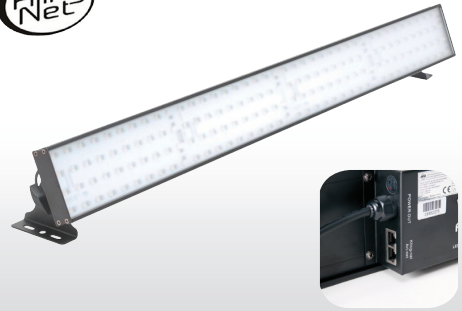

FLASH KLING BATTEN

Code: 1226200048

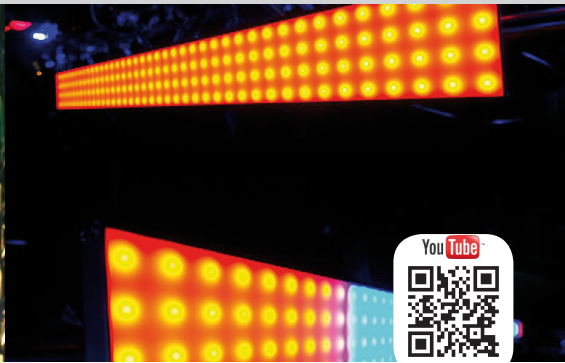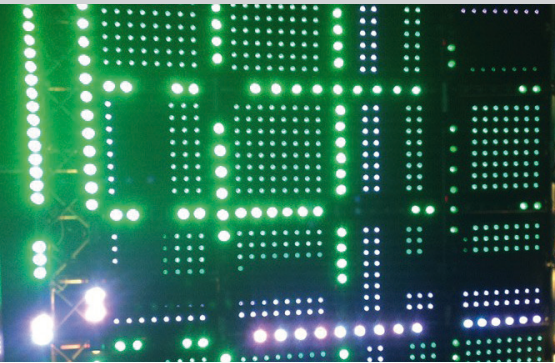


LED Master is an all-in-one media solution that will allow you to create the most dynamic LED light shows. Based on our Kling-Net protocol, LEDMaster will take your LED light show to the next level. LED Master and Kling-Net work together to do all the hard work for you, making operation simpler than ever. Kling-Net adds a layer of 'intelligence' to even the most simple LED devices, enabling it to talk directly with LED Master. This then enables the LED devices to configure themselves automatically, removing the need for complicated setup processes. KlingNet protocol is found imbedded in several ADJ and Elation fixtures, such as ADJ's Illusion Dotz 4.4, Illusion Dotz 3.3, Ultra Kling Bar 18, Flash Kling Panel 64 and Elation's EZ Kling interface, which can be used to run ANY LED pixel controllable DMX product. Designed in 3 steps, Mapping, Programming and Performance, LEDMaster is one of the most powerful and easy to use media softwares of its kind.

- Video control software for use with Kling-Net compatible LED fixtures
- Compatible with EZ-Kling box
- 3 Program Modes: Mapping mode; Scene Programming mode; Performance mode
- Mapping mode automatically recognizes Kling-net fixtures
- Scene programming mode allows for users to create scenes
- Performance mode allows for scenes to be triggered live
- Auto-configuring with a large range of fixtures

The ADJ Flash Kling Batten is a linear panel that provides an exciting and affordable way to bring low res video and moving graphics to a lightshow for nightclubs, stages and multi-media events. The Flash Kling Batten is compatible with KlingNet and ArtNet protocols. Recommended software solutions include LED Master, Arkaos Media Master Express or Arkaos Media Master Pro. The fixtures are connected via a RJ45 (Cat5) connection. Daisy chain up to 12 fixtures from the built-in IEC In/Out connects on the rear panel.

- LED Pixel panel for, low resolution, video displays
- 160 x 0.164W SMD RGB 3-in-1 LED's (40x4 Matrix Configuration)
- 120-Degree Beam Angle
- KlingNet and ArtNet compatible. Recommended control solutions; Arkaos Media Master Express, Media Master Pro and LED Master software (sold separately).
- RJ45 Connection
- Includes hanging brackets and safety loops
- Electronic Dimming 0-100% (via software)
- Multi-voltage: AC 100V-240V 50/60Hz
- Power Cord Daisy Chain up to 12 fixtures max.
- Power Consumption: 54W
- Dimensions (LxWxH): 1000 x 104 x 140mm
- Weight: 3.3 Kgs.

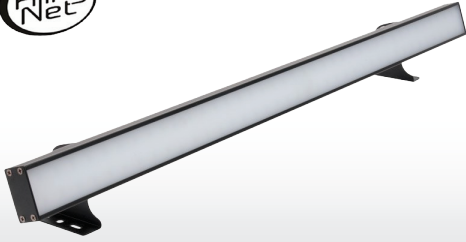


FLASH KLING STRIP

Code: 1226300051



MCTRL-300

Code: 1226300034

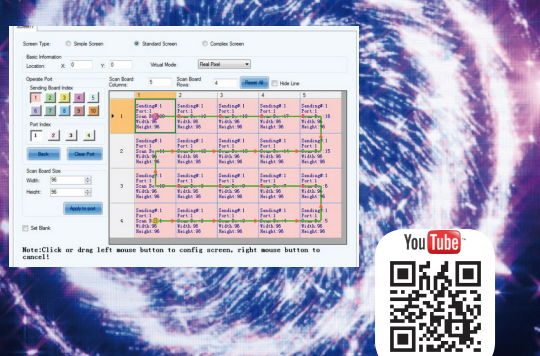

LED Pixel panel for low resolution video displays. Compatible with KlingNet and Art-Net protocol

- LED Pixel panel for, low resolution, video displays
- 80 x 0.164W SMD RGB 3-in1 LED's (40x2 Matrix Configuration)
- 120-Degree Beam Angle
- KlingNet and ArtNet compatible. Recommended control solutions; Arkaos Media Master Express, Media Master Pro and LED Master software's (sold separately).
- RJ45 Connection
- Electronic Dimming 0-100% (via software)
- Multi-voltage: AC 100V-240V 50/60Hz
- Power Cord Daisy Chain up to 22 fixtures max.
- Power Consumption: 28W
- Dimensions (LxWxH): 1000 x 59 x 140mm
- Weight: 2.7 Kg

The MCTRL-300 is a controller for ADJ's AV6 LED video panels. It features one DVI signal source input and two RJ45 pixel-data outputs for 2 independant screens.

The controller is easily configured via USB and it will drive up to 1.16 million pixels supporting the following resolutions: 1280 x 1024, 1024 x 1200, 1600 x 848, 1920 x 712, 2048 x 668.




The MCTRL-300 is an essential accessory for the AV6 video panels.

- Control Mode: Synchronous Display with Control PC by DVI
- Frame Update Frequency: 50-60Hz
- Scan Mode: 1/12 Duty
- Refresh Rate: 1200Hz
- Support Input: Composite, S-Video, Component, VGA, DVI, HDMI, HD_SDI to DVI
- Control Distance: Ethernet Cable <100m or Fiber Optic> 120m
- Supported Modes: 1280 x 1024, 1024 x 1200, 1600 x 848, 1920 x 712, 2048 x 668
- Brightness Correction: Pixel, Module, Cabinet
- Requires a computer (sold separately)
- 2 separate RJ45 CAT6 outputs for 2 AV-6 screens (mirrored or independant content)



AV6

Code: 1226300032

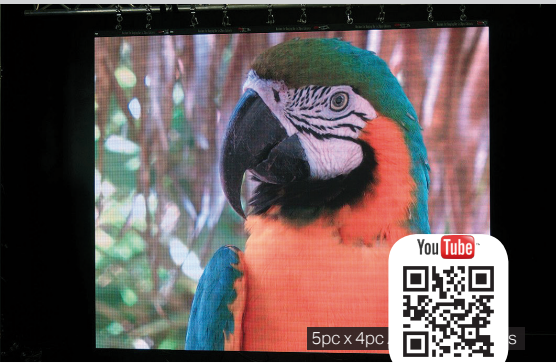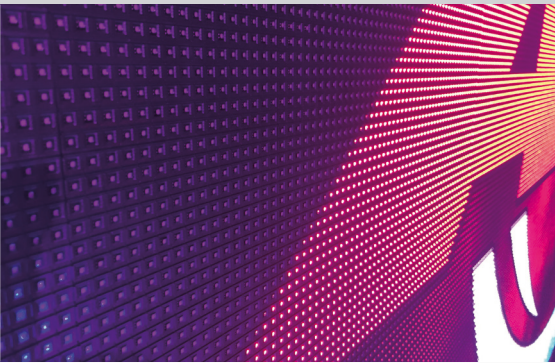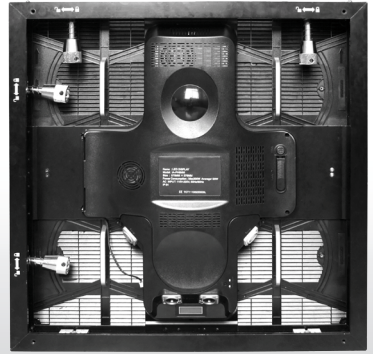

- Pixel Pitch: 6.0mm (0.25")
- LED Configuration: 3-in-1 SMD2121 LED
- Pixel Density: 96x96; 27,777 per square meter
- For indoor use only
- Size: 576 x 576 x 75mm / 22.75" x 22.75" x 3"
- Module Quantity: 4
- Weight: 23lbs. / 8.15Kg

MECHANICAL RATINGS:

- Surface Flatness: Gaps<0.5mm

OPTICAL RATINGS:

- Brightness: 1200 NITS
- View Angle: Horizontal 140°/Vertical 140°
- Distance: 20ft (6m)
- Gray Scale / Display Color: 14Bit
- Brightness Adjustment: 0~100% 100 Levels
- Processing: 14Bit

POWER SUPPLY:

- Operation Power: 100~240V 50-60Hz
- Max. Power Consumption: 300W/per panel
- Ave. Power Consumption: 120W/per panel
- Connections Power/Data: Power-PowerCon In/Out; Data EtherCon In/Out

CONTROL SYSTEM:

- Control Mode: Nova Star Synchronous System with Control via DVI
- Frame Update Frequency: 50-60Hz
- Scan Mode: 1/12 Duty
- Refresh Rate: 1200Hz
- Support Input: Composite, S-Video, Component, VGA, DVI, HDMI, HD_SDI

- Control Distance: Ethernet Cable <100m or Fiber Optic>120m
- Support VGA Mode: 1280 x 1024, 1024 x 1200, 1600 x 848, 1920 x 712, 2048 x 668
- Brightness Correction: Pixel, Module, Cabinet

ENVIRONMENTAL:

- Operating Temp/Humidity: Fahrenheit: -4° +104° / Celsius: -20°+ 40°
- 10-90% (No Condensation)
- Operating Life / MTBF: 100,000 Hours / 5,000 Hours
- Protection Level: IP20 (Front and Back)
- Out of Control Rate: <0.02%
- Listings: CE, FCC Class A

AV6RBI

Code: 1226300033



Single panel rigging bar for the AV6. Up to 20 panels maximum vertical hang.

AV6FC 8PCS FLIGHT CASE

Code: 1226300049

- Fits 8 AV6 video panels
- 9mm Plywood | Butterfly Latches
- Swivel Castors | Steel Ball Corners
- Foam Inlay
- Outer dimensions (LxWxH): 1.01 x 0.66 x 0.82m





Included:
FFJWR wireless
remote



FOG FURY JETT

Code: 1411100017



Included:
VFV-WR
wireless remote



VF VOLCANO

Code: 1411100018



- 700W professional DMX vertical Fog Machine with 12x 3-Watt LEDs
- High performance pump for optimum output
- ADJ's Electronic Thermo Sensing (ETS) technology
- Automatic circuit cut-off to protect pump if fog fluid tank runs dry
- Special heating element design that uses an oil type transmission pipeline system to minimize the possibility clogging
- 3 Operational modes: Manual, Remote Control, or DMX Controlled
- 5 DMX modes : 1, 2, 3, 5 or 7 DMX Channels
- 4-button control panel & LCD display on rear panel
- 3-pin DMX XLR In/Out connections
- Convenient carrying handle
- Low Fluid Indicator on rear
- Warm-up time: 9 min
- External fog fluid tank: 3 Liter
- Fog Output: 20,000 (cu.ft/min)
- Tank can be mounted to either front or rear so that the effect may be pointed up or down
- Included Accessory: ADJ FFJWR wireless remote
- Safety Loop on board
- Only use high quality, water-based fog fluid, for optimum result, use ADJ Fog Juice CO2
- Light Source: 12x 3-Watt LEDs, (3 Red, 3 Green, 3 Blue & 3 Amber LEDs)
- Heater: 650W
- Power Consumption: 730W (Full on)
- Dimensions (LxWxH): 397 x 302 x 191mm
- Weight: 7.1 kg.

- 750W professional vertical Fog Machine with 6 x 3-Watt LEDs
- High performance pump for optimum output
- ADJ's Electronic Thermo Sensing (ETS) technology
- Special heating element design that uses an oil type transmission pipeline system to minimize the possibility clogging
- 2 Operational modes: Manual & Remote Control
- Convenient carrying handle
- Low Fluid LED Indicator on rear
- Warm-up time: 6 min
- Output time: 8 seconds (max.)
- Re heat interval: 9.3 seconds (Average)
- External fog fluid tank: 1 Liter
- Fog Output: 8,000 (cu.ft/min)
- Fluid consumption: 14ml/min
- Included Accessory: VFV-WR wireless remote to trigger color/fog output on one or multiple VF Volcano's
- Power Connection: IEC AC In
- Only use high quality, water-based fog fluid, for optimum result, use ADJ Fog Juice CO2
- Light Source: 6 x 3-Watt LEDs, (2 Red, 2 Green, & 2 Blue LEDs)
- Heater: 750W
- Voltage: AC 120V or 240 50/60Hz (non switching)
- Power Consumption: 770W
- Dimensions (LxWxH): 327 x 212 x 177mm
- Weight: 3.36 kg.



ADJ UC IR
(Sold Separately)



AIRSTREAM IR
compatible



VF SNOW FLURRY HO™

Code: 1223100003

BATTERY POWERED



BUBBLETRON GO™

Code: 1212100014



Product Video

The VF Flurry is a highly efficient, 1250W Snow Machine. It has a spray distance of 8-10 meters. Features include: Low/High volume selection switch, low snow fluid shut off to protect the pump, snow fluid level indicator, 2.3 Liter internal snow fluid tank, and an On/Off switch on the rear panel. The VF Flurry uses water based snow fluid.

- 1250W mobile DMX Snow Machine
- Spray distance: 8-10 meters
- Volume selection switch: Low or high snow output
- Low snow fluid sensor to protect pump
- Internal snow fluid tank: 2.3 Liter
- Fluid level indicator
- Includes wired remote
- ADJ UC IR Compatible (Sold Separately)
- On/Off switch on rear panel
- 3-pin DMX In/Out, 1 DMX channel
- Uses water based snow fluid
- Dimensions (LxWxH): 510 x 316 x 349mm (With Bracket)
510 x 316 x 268mm (Without Bracket)
- Weight: 8 kg

The ADJ Bubbletron Go is a battery powered bubble machine and is the perfect solution for anyone that wants to create a fun or artistic effect on stage or at a performance with no available power outlet. It's very easy to use as easy as pour in the bubble juice and turn it on! Bubbletron Go creates 100's of bubbles per minute from high velocity, high output fan.

- Portable high output bubble machine creates hundreds of bubbles per minute
- Durable plastic casing with EZ-Access front fluid tank
- Large high velocity fan makes bubbles rise quickly in the air
- ON/OFF switch on rear of unit
- ON/OFF wired remote with 25 ft/8M cable
- Carrying handle
- Most types of bubble liquid acceptable
- Power Consumption: 24W (120V); 10W (230V)
- Fluid Consumption Rate: 1 Liter every 50 Mins. (120V); 1 Liter every 90 Mins. (230V)
- Battery Charge Time: 6 Hours (Per Cycle)
- Battery Life: 5 Hours (Full On)
- Multi-voltage: AC100-240V, 50/60Hz (Charger) DC12V 1000mA
- Dimensions (LxWxH): 352 x 176 x 209mm
- Weight: 2kg.

TOUGH BAG ISPX2

Code: 1521000250

Durable semi-hard case for transporting two ADJ Inno Spot Pro or Inno Spot Pro WH Moving Heads

- Durable semi-hard case for transporting of lighting fixtures
- Fits two (2) ADJ Inno Spot Pro or two (2) ADJ Inno Spot Pro WH Moving Heads
- Wheels & pull handle
- 3 compartments: 2 for lighting fixtures, 1 for cables
- Custom fit interior protects lighting fixtures during transport and storage
- Great for rentals companies and mobile lighting designers and entertainers on the go
- Dimensions (LxWxH): 1000x395x260mm
- Inner Dimensions (LxWxH): 305x180x107Base Compartment / Q 234x184x304 Head Compartment
- Weight: 8 kg (without fixtures)



TOUGH BAG ISPX4

Code: 1521000255

Durable semi-hard case for transporting 4 ADJ Inno Pocket Series Moving Heads ,

- Durable semi-hard case for transporting of lighting fixtures
- Fits four (4) ADJ Inno Pocket Spot, Inno Pocket Spot Pearl, Inno Pocket Beam Q4, Inno Pocket Wash or Inno Pocket Z4 Moving Heads
- Wheels & pull handle
- 5 compartments: 4 for lighting fixtures, 1 for cabling & brackets
- Custom fit interior protects lighting fixtures during transport and storage
- Great for rentals companies and mobile lighting designers and entertainers on the go
- Dimensions (LxWxH):
- Inner Dimensions (LxWxH): Cable Compartment / Moving Head Compartment
- Weight: 6 kg (without fixtures)



TOURING CASE 2X ILLUSION DOTZ 4.4/3.3

Code: 1521000251

Protect your equipment during storage and transport.

This case is custom designed for 2 x Illusion Dotz 4.4 or Illusion Dotz 3.3 Moving Panels

- Solid 6.5mm thick plywood
- Strong aluminum profiles
- 8 Duty handles
- Steel ball corners
- 4 wheels for easy transportation
- 2 Butterfly locks
- Color Black
- Dimensions (LxWxH) : 800 x 600 x 700mm
- Weight : 41,2kg




TOURING CASE 2X CRAZY 8

Code: 1521000252

Protect your equipment during storage and transport.
This case is custom designed for 2 x Crazy 8

- Solid 6,5mm thick plywood
- Strong aluminum profiles
- 4 Duty handles
- Steel ball corners
- Integrated wheelbases (wheels sold separately)
- 2 Butterfly locks
- Color Black
- Dimensions (LxWxH) : 600 x 400 x 460mm
- Weight : 13kg




TOURING CASE 2X VIZI BEAM 5RX

Code: 1521000253

Protect your equipment during storage and transport.
This case is custom designed for 2 x Vizi Beam 5RX

- Solid 6,5mm thick plywood
- Strong aluminum profiles
- 4 Duty handles
- Steel ball corners
- 4 wheels for easy transportation
- 2 Butterfly locks
- Color Black
- Dimensions (LxWxH): 896 x 460 x 580mm
- Weight : 30,2kg



TOURING CASE 6X LED PAR UNIVERSAL

Code: 1521000254

Protect your equipment during storage and transport.
This case is custom designed for 6 x LED-PAR fixtures, compatible with
ADJ's WiFly EXR Hex PAR, WiFly EXR QA5, WiFly QA5 IP, Lighning COB
Cannon, UV COB Cannon, WiFly EXR Dotz PAR, WiFly PAR QA5, WiFly PAR
QA5 WH, WiFly EXR Hex PAR and many others

- Solid 6,5mm thick plywood
- Strong aluminum profiles
- 4 Duty handles
- Steel ball corners
- Integrated wheelbase (wheels sold separately)
- 2 Butterfly locks
- Color Black
- Dimensions (LxWxH): 780 x 580 x 370mm
- PAR-compartment measures (LxWxH): 260 x 200 x 305mm
- Weight : 20,3Kg





MEDIA OPERATOR BT

Code: 1112000005

AMERICAN AUDIO®

The American Audio, Media Operator BT is a fast, simple and reliable all-in-one MP3/Bluetooth media player designed for permanent installations where easy control of music is a must (ie. restaurants, fitness studios, retail locations, etc.) and great for mobile entertainers as well. The Media Operator BT offers digital playback from SD cards or USB sticks/drives.

The Media Operator BT includes full MP3 playback control as well as a microphone input (XLR / 1/4" combo), master volume control and 3x line output options. Plug the unit directly into powered speakers, an amplifier or secondary mixer through the balanced XLR, 1/4" or stereo RCA outputs.

MEDIA OPERATOR BT SPECIFICATIONS:

- SD Card* / USB 2.0 / Bluetooth full functioning MP3 Player
- Track Time Display
- Track Search Buttons
- Easy-to-use
- Bright LCD Display
- Reads SD/SDHC cards up to 32GB
- Up to 1000 MP3 songs on a 1GB SD Card** (MP3 recorded at 128bit rate**)
- 4x RCA line Inputs and 1x 35mm Auxiliary Jack Input
- 1x RCA, 1x L/R Unbalanced 1/4" Jack, 1x L/R Balanced XLR Outputs
- Master music output volume control
- Individual EQ Treble / EQ Bass control for Music
- Combo Mic input: 1/4" jack and XLR
- Master mic output volume control
- Individual EQ Treble / EQ Bass control for Mic
- Voltage Selector Switch: 115V or 230V 50/60Hz
- Dimensions (L x W x H): 483 x 193 x 44 mm (1 rack space)
- Weight: 1.7 kg.

*SD Card is not Included

**Capacity may vary



VMS5

Code: 1154000045

AMERICAN AUDIO®

VMS5 SPECIFICATIONS:

- SD Card* / USB 2.0 / Bluetooth full functioning MP3 Player
- VMS5 preliminary features:
- 6 Channel Stand Alone Mixer with full Midi capability
- New Larger Platters | New Browser Section
- New Easy View LED Mixer section
- Improved Button Layout
- Virtual DJ 8 LE included with new software features
- User configurable sound card, DVS Mode or 4-Deck Mode
- 2 Pro Quality Microphone XLR Combo Mic inputs with 3 Band EQ
- Innofader cross fader compatible (sold separately)
- 2 Phono, 4 Line, 4 USB, 2 Microphone inputs



ELS GO 8BT

Code: 1161350014



**BATTERY
POWERED**



ELS GO 15BT

Code: 1161350013



**BATTERY
POWERED**

AMERICAN AUDIO®

Lightweight, battery powered 8-inch active speaker specifically designed for the DJ and Rental Market. Extremely High Efficiency design with low power consumption and plenty of output power for those small, mid level parties. Includes Bluetooth + USB port to play music from a thumb drive.



Product Video

- 2-way Active lightweight speaker with rechargeable battery
- 8-inch woofer / 1" high frequency Driver
- Bluetooth Music Playback with compatible Bluetooth device
- USB and SD inputs with transport control
- 8 Hours music playback on a single charge, see manual for details
- 100 Watts RMS
- Play off standard power or built in rechargeable battery.
- Stand Mountable
- Microphone, and Line level controls
- Master Level Control
- Bluetooth/SD/USB level control
- 1 XLR & TRS MIC input with digital Echo
- 1 1/4" & 1 Stereo RCA line inputs, 2 total
- 1/8" stereo line level output
- Easily replaceable battery
- 4-Way Protection System
- Short circuit protection
- Thermal protection
- On/off Mute
- LF/HF Limiters
- Active signal limiting system with Clip LED indicator on rear panel
- Charge indicator LED
- Time Aligned Electronic Crossover
- Dimensions (LxWxH): 10.5" x 11" x 15.5"/27 x 28 x 39cm
- Weight: 18lbs/ 8kg

AMERICAN AUDIO®

Lightweight, battery powered 15-inch active speaker specifically designed for the DJ and Rental Market. Extremely High Efficiency design with low power consumption and plenty of output power for those small, mid level parties. Includes Bluetooth + USB port to play music from a thumb drive.



Product Video

- Lightweight, battery powered + integrated Bluetooth + USB/SD Card slot
- 15" USB Active speaker specifically designed for the DJ and Rental Market.
- Extremely High Efficiency design with low power consumption and plenty of output power for those small, mid level parties.
- Bi-amp Amplifier with 1 x amp powering the Titanium Driver and 1 x amp for 15" woofer with magnet.
- Microphone input (XLR+Jack) and volume control great for when you want to use it for as a small PA speaker.
- Line inputs XLR + RCA
- Line Outputs XLR+Jack
- Master Volume control
- Built-In FM Radio
- 5 channel EQ
- Max SPL 110dB
- Dimensions:
- 22" (L) x 15" (W) x 12" (H) / 558.8mm x 381mm x 317.5mm
- Weight: 25 Lbs. / 12 kg

AMERICAN AUDIO®

CPX SERIES

High Powered 2-Way Active Speakers



CPX SERIES

pure AUDIO
EXCITEMENT

Specifications

- 2-way Speaker with High Efficiency Class D Amplifier
- 200W Built-in Bi-amplifier
- Time Aligned Electronic Crossover
- 5 M8 Rigging points
- Stand Mountable | Heavy Duty steel grill | Ergonomic handles
- Power and Clip LED Indicators
- XLR and RCA inputs
- XLR and TRS throughputs
- Clipping and Thermal Protection
- Balanced Input Impedance: Line 20K Ω , Mic 3.6K Ω
- Unbalanced Input Impedance: Line 10K Ω , Mic 1.8K Ω
- S/N Ratio: Line 100dB, Mic 80dB
- Frequency Response: 30 Hz – 18 kHz
- Nominal Coverage: 90° x 60°

Crossover:

- Low Pass: 2nd order filter 2.7KHz
- Low Cut: 2nd order filter 30Hz

Channel Equalizer:

- Bass: 100Hz +/-12dB
- Treble: 10KHz +/-12dB



YouTube



Product Video

CPX 8A

Code: 1161220011

- 2-way Speaker with High Efficiency Class D 200W amplifier
- Low Frequency: 8" (210mm), 2" (50mm) Voice Coil
- High Frequency: 25mm Voice Coil, 1"(25mm) Throat
- 5 M8 Rigging points, Stand Mountable
- Frequency Response: 30 Hz – 18 kHz, Max. SPL: 112dB
- Nominal Coverage: 90° x 60°
- Dimensions (LxWxH): 11.75" x 10.5" x 18" / 295 x 265 x 452mm
- Weight: 31 lbs. / 14 kg.

CPX 12A

Code: 1161340011

- 2-way Speaker with High Efficiency Class D 500W amplifier
- Low Frequency: 12" (312mm), 2.5" (65mm) Voice Coil
- High Frequency: 34mm Voice Coil, 1"(25mm) Throat
- 5 M8 Rigging points, Stand Mountable
- Frequency Response: 30 Hz – 18 kHz, Max. SPL: 116dB
- Nominal Coverage: 90° x 60°
- Dimensions (LxWxH): 15" x 14.25" x 23" / 378 x 360 x 580mm
- Weight: 48 lbs. / 21.4 kg

CPX 10A

Code: 1161330011

- 2-way Speaker with High Efficiency Class D 250W amplifier
- Low Frequency: 10" (255mm), 2" (50mm) Voice Coil
- High Frequency: 25mm Voice Coil, 1"(25mm) Throat
- 5 M8 Rigging points, Stand Mountable
- Frequency Response: 30 Hz – 18 kHz, Max. SPL: 114dB
- Nominal Coverage: 90° x 60°
- Dimensions (LxWxH): 13.75" x 12.75" x 20.5" / 347 x 320 x 516mm
- Weight: 40 lbs. / 17.95 kg

CPX 15A

Code: 1161350011

- 2-way Speaker with High Efficiency Class D 500W amplifier
- Low Frequency: 15" (390mm), 2.5" (75mm) Voice Coil
- High Frequency: 44mm Voice Coil, 1"(25mm) Throat
- 5 M8 Rigging points, Stand Mountable
- Frequency Response: 30 Hz – 18 kHz, Max. SPL: 118dB
- Nominal Coverage: 90° x 60°
- Dimensions (LxWxH): 18" x 15.5" x 27" / 456 x 390 x 680mm
- Weight: 62 lbs. / 28 kg

LSS 4S SPEAKER STAND STEEL BL


Code: 1163900011

Sturdy steel speaker stand tripod

- 35 mm mast diameter
- With safety bold
- Maximum height: 209 cm
- Minimum height: 108 cm
- Color: black
- Max load: 30kg




STAGE & EVENT LIGHT SETUP

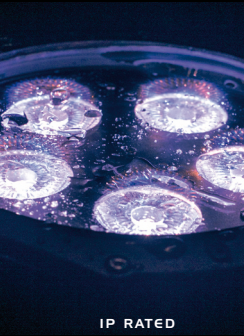

IP RATED




BATTERY POWERED

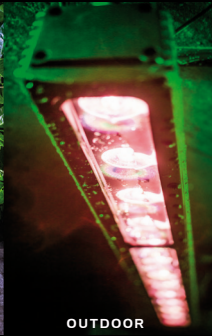

OUTDOOR



RGB+UV 4-IN-1 LED

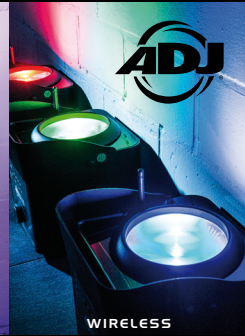

WIRELESS

www.adj.eu

Your strong partner for strong business!

DURATRUSS
PROFESSIONAL CONSTRUCTIONS®

► LARGE PRODUCTION CAPACITY IN E.U.

► EXCELLENT LOGISTICS AND AVAILABILITY

► TÜV MONITORED PRODUCTION

► HIGH QUALITY MANUFACTURING FOR DECADES

TRUSSING | COUPLER | FABRICS | STAGE

DuraTruss B.V. 6468 EW Kerkrade
Junostraat 2 The Netherlands

www.duratruss.eu

Note

#adj



[instagram.com/americanadj](https://www.instagram.com/americanadj)



[pinterest.com/americanadj](https://www.pinterest.com/americanadj)



[facebook.com/hashtag/americanadj](https://www.facebook.com/hashtag/americanadj)



[youtube.com/adjlighting](https://www.youtube.com/adjlighting)



twitter.com/americanadj_eu



[snapchat.com/adjlighting](https://www.snapchat.com/adjlighting)



Join Our Newsletter @ www.adj.eu

always
up to
date!



All rights reserved. All specifications are subject to change without prior notice.
We assume no liability for typing or printing errors.
No printing or copying without explicit consent.

All shown ADJ products are exclusively for professional use.
Handling, service and installing only by qualified personnel.

© Copyright by ADJ Supply Europe B.V. 2015

www.adj.com Los Angeles, USA • Miami, USA • Kerkrade, Netherlands • Guangzhou, China
www.adj.eu ADJ Supply Europe B.V. • Junostraat 2 • 6468 EW Kerkrade • The Netherlands

pure LIGHTING EXCITEMENT



XS 600

VIZI BEAM 5RX

RICOCHET



www.adj.eu

STAGE & EVENT LIGHT SETUP



IP RATED



BATTERY POWERED



OUTDOOR



RGB+UV 4-IN-1 LED



WIRELESS

www.adj.com Los Angeles, USA • Miami, USA • Kerkrade, Netherlands • Guangzhou, China
www.adj.eu ADJ Supply Europe B.V. • Junostraat 2 • 6468 EW Kerkrade • The Netherlands