



VOL. 33 EU



 **ACCU-CASE™**
PLAY IT SAFE...

 **ACCU-CABLE™**
EXTEND YOUR WORLD...

AMERICAN AUDIO®

reliable lighting products for clubs,
Restaurants, schools, bands and theatres.



www.adj.eu

Starting in 1985, as a supplier of lighting products to mobile entertainers, the Los Angeles-based ADJ Group has grown in to a diversified global enterprise which collectively provide lighting and audio products for home, architectural, stage, touring and mobile entertainment applications, as well as trussing for displays, events and stage productions.

With offices on five continents, the company has earned an international reputation for quality, reliability and unwavering loyalty to its retail partners. ADJ is still operated by its founders. With more than 250 employees the ADJ Group belongs to the world's largest entertainment electronics companies and continues to grow.

The company has also followed a philosophy of innovation, and has been responsible for many breakthroughs in the professional lighting industry. Designed with the end-user in mind, its products have been profitable sellers at a wide variety of retail outlets from independent specialty stores through the qualified ADJ partner network to major retailers like CPC, Conrad, Best Buy and Amazon.

Its products have also been specified for many major concert tours, including John Mayer, Bon Jovi and Brad Paisley as well as at high profile architectural application, such as the Luxor and Venetian hotels in Las Vegas, Royal Caribbean International's Oasis of the Sea (the world's largest cruise ship) and at major attractions like Disneyland and Universal Studios theme park.

With a proven track record of filling orders on time and standing behind everything it sells, the ADJ Group can help put any venue in lights!

„Lighting the future!“





CONTENTS


3D VISION PL	24	ENTOUR CYCLONE	78	MEDIA OPERATOR BT	128
5P HEX/PEARL	37	ENTOUR HAZE PRO	78	MEGA 64 PROFILE PLUS	46
7P HEX IP	41	ENTOUR SNOW	77	MEGA HEX PAR	47
7PZ IP	27	ENTOUR VENUE	77	MEGA QA GO	39
12P HEX IP	41	ENTOUR VT-I CONTROLLER	78	MEGA QPLUS GO	39
12P HEX/PEARL	37	EVENT FACADE I I BL/WH	132	MEGA TRI BAR	51
18P HEX IP	41	EVENT FACADE SCRIMS	132	MEGA TRIPAR	46
		EZ KLING	25	MICRO 3D II	62
ACCUCASE	92-105			MICRO GOBO II	62
ACCUCABLE	106-114	FLASH ROPE	64	MICROPHONE HOLDERS	89
AV SCREENS & ACCESSORIES	6-8	FLOOR STAND	91	MICROPHONE STANDS	89
AIRSTREAM DMX	117	FOCUS SPOT ONE	19	MINI DEKKER	59
ASTEROID 1200	21	FOCUS SPOT TWO	19	MINI DEKKER LZR	59
		FOCUS SPOT THREE Z/PEARL	18	MINI LED	131
BOOM BOX FX1	55	FOG FURY 1000 I I	80	MINI O-CLAMP	90
BOOM BOX FX2	55	FOG FURY 2000	80	MINI TRI BALL II	60
BOOM BOX FX3	54	FOG FURY 3000	80	MIRRORBALLS & ACCESSORIES	86
		FOG FURY JETT	79	MISTER KOOL I I	82
COB CANNON	34	FOG FURY JETT PRO	79	MOD 60 KIT PEARL	44
COB CANNON WASH PEARL	34	FS600LED	72	MOD 100 KIT PEARL	44
COLOR STAND LED	88			MOD BARN DOORS BLK/WHT	44
COLOR STRAND LED	53	GOOSENECK LAMP BNC	131	MOD HEX100	44
		GOOSENECK LAMP XLR	131	MOD QA60	44
DJ-MTS 4	87			MOD QW100	45
DJ-MTS 4 BAG	87	H20 DMX IR	73	MOD TW100	45
DMX OPERATOR 384	119	H20 IR	73	MYDMX 3.0	116
DOTZ MATRIX	31			MYDMX-RM	116
DOTZ PAR	35	IKON IR	72		
DOTZ PAR 100	35	IKON PROFILE	71	OSLIM 2	90
DOTZ TPAR SYSTEM	31	INNO COLOR BEAM Z19	15		
		INNO POCKET ROLL	23	PAR Z100 3K	33
ECO-MS3	89	INNO POCKET SCAN	23	PAR Z100 5K	33
ECO UV BAR 50 IR	66	INNO POCKET SPOT	20	PAR ZP100 3K	33
ECO UV BAR DMX	66	INNO POCKET Z4	16	PINSPOT LED II	74
ECO UV BAR PLUS IR	66	INNO ROLL HP	22	POCKET PRO/PEARL	20
EFFECTS REMOTES	84	INNO SCAN HP	22	PRO-EVENT TABLE II	132
EFFECTS FLUID	85			PROFILE PANEL RGBA	54
ELEMENT HEX	42	LASER EMERGENCY SWITCH	62	PROFILE PLUS	46
ELEMENT HEX IP/PEARL	42	LED COLOR TUBE II	53		
ELEMENT QA	43	LED RGBW E27 BULB	53	QUAD BAR LIGHTING	49
ELEMENT QAIP	43	LIGHT BRIDGE CLAMP	90	QUAD LED	21
ELS GO 8BT	126	LIGHT BRIDGE CLAMP BLACK	90	QUAD PHASE HP	60
ELS GO 15BT	126	LSS-3S, PRO	88		
ENCORE FR50Z	32	LTS-6	87	RELEX PULSE LED 6 I REVO 4 IR	58
ENCORE FRI50Z	32	LTS COLOR	87	REMOTES	124
ENCORE PROFILE	70			REVO SWEEP	61
ENTOURAGE	77			RGB3C IR	121

SABER SPOT DTW	74	WIFLY EXR BATTERY	29
SABER SPOT RGBW	75	WIFLY EXR HEX5 IP	28
SABER SPOT WW	75	WIFLY EXR QA5 IP	27
SB-2 BAG FOR 2 STANDS	88	WIFLY EXR QA12BAR IP	28
SDC-6 FADERDESK	119	WIFLY NE1	29
SPEAKER STAND STEEL, BLACK	88	WIFLY RGBW8C	29
STARBURST	58		
STINGER	57	XEQ-152B EQUALIZER	128
STINGER STAR	56		
STROBE SP-1500 DMX MKII	65		
SWB40	88		
SWEEPER BEAM	21		
TRIPOD	88		
TTS TABLE TOP STAND	131		
TV-SPIGOT	91		
UB 6H	50		
UB 9H	49		
UB 12H	49		
UCD-100 MK111	128		
ULTRA HEX BAR 6	48		
ULTRA HEX BAR 12	48		
ULTRA HEX PAR3	38		
ULTRA KLING BAR18	25		
USB GOOSENECK LIGHT	131		
USB LITE	131		
UV 72IP	64		
UV COB CANNON	64		
UV FLOOD 36	65		
UV LED BAR20 IR	65		
VBAR PAK	50		
VERTIGO HEX LED	60		
VF FLURRY	82		
VF SNOW FLURRY HO	82		
VFVOLCANO	79		
VIZI BEAM 5RX	12		
VIZI BEAM RXONE	12		
VIZI BSW300	11		
VIZI HEX WASH7	14		
VIZI HYBRID 16RX	11		
VIZI Q WASH7	14		
VIZI WASH PRO	15		
VPAR PAK	47		
VPS SERIES	130		



www.adj.eu

Log onto to American DJ and American Audio's official web site for up-to-the-moment new product information, press releases, user manuals, and product videos. You can also register your product online, join take part in the DJ and lighting Forums and look for a local American DJ/American Audio Authorized Dealer in your area. Don't forget to join our e-mail list to get the ADJ News Wave each month!

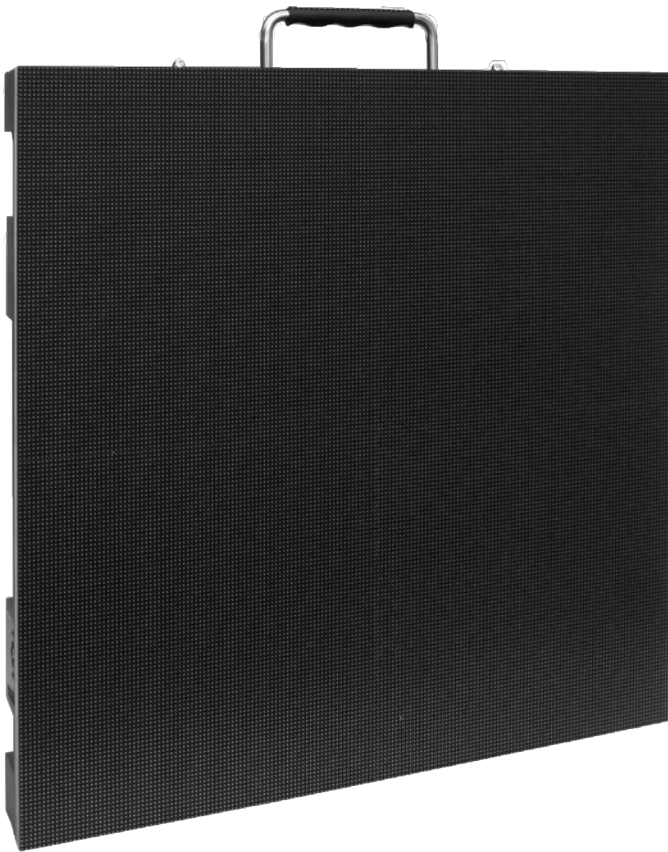

NEW! AV4 IP

Specifications

- Pixel Pitch: 4.81mm (0.19")
- LED Configuration: 3-in-1 SMD1921 LED
- Pixel Density: 104x104; 43264 (dot/m2)
- Panel Size :19.75" x 19.75" x 4" / 500 x 500 x 100mm
- Module Quantity: 2
- Module Size: 250 x 500mm
- Module Resolution: 52 x 104 pixels
- Panel Weight: 20 lbs. / 9kg.
- Surface Flatness: Gaps<0.5mm
- Brightness: 4000 NITS
- View Angle: Horizontal 140°/Vertical 140°
- Gray Scaler: 14-bit
- Brightness Adjustment: 0~100% / 100 Levels
- Processing: 14-bit
- Input Voltage: 100~240V 50-60Hz
- Max. Power consumption: 180W/per panel
- Ave. Power consumption: 60W/per panel
- Connections Power/Data: Power = True1 PowerCON In/Out; Data = IP65 etherCON In/Out
- Operating Temperature: Celsius : -10° to +50°; Fahrenheit : -14° to +122°
- Humidity: 10-90%
- Operating Life/MTBF: @ 50,000 hours
- Protection Level : IP65 Outdoor rated
- Out of Control Rate <0,02%
- Listings: cETL, CE, FCC Class A



CODE: 1226300070



ADJ TOURING CASE

8X AV3/AV4

- Fits 8 AV3 or 8x AV4IP video panels
- 9mm Plywood
- Butterfly Latches
- Swivel Castors

CODE: 1521000305



AV3/AV4

RSB

Rear Support Bracket
for AV3 & AV4IP Video
Panels

CODE: 1226300059

AV3/AV4 RBI

- Single panel rigging bar for AV3 & AV4IP
- Up to 15 panels max vertical hang

CODE: 1226300057





AV6X

Specifications

- Pixel Pitch: 6.0mm (0.25")
- LED Configuration: 3-in-1 SMD2121 LED
- Pixel Density: 96x96; 27,777 per square meter
- For indoor use only
- Size: 576 x 576 x 75mm / 22.75" x 22.75" x 3"
- Module Quantity: 4
- Weight: 23lbs. / 8.15Kg
- ETL Approved
- Surface Flatness: Gaps<0.5mm
- Brightness: 1200 NITS
- View Angle: Horizontal 140°/Vertical 140°
- Distance: 20ft (6m)
- Gray Scale / Display Color: 14Bit
- Brightness Adjustment: 0~100% 100 Levels
- Processing: 14Bit
- Operation Power: 100~240V 50-60Hz
- Max. Power consumption: 300W/per panel
- Ave. Power consumption: 120W/per panel
- Connections Power/Data: Power-PowerCON In/Out;
- Data EtherCon In/Out
- Operating Temp / Humidity: Fahrenheit: -4° + 104° Celsius: -20°+ 40°/ 10-90% (No Condensation)
- Operating Life / MTBF: 100,000 Hours / 5,000 Hours
- Protection Level: IP20 (Front and Back)
- Out of Control Rate: <0.02%
- Listings: CE, FCC Class A, RoHS, China RoHS, ETL


CODE: I226300054



ADJ TOURING CASE 8X AV6X

- Fits 8 AV6X video panels
- 9mm Plywood
- Butterfly Latches
- Swivel Castors
- Outer dimensions (LxWxH): 39.8" x 26"x 32.3" (1.01 x 0.66 x 0.82m)

CODE: I521000306

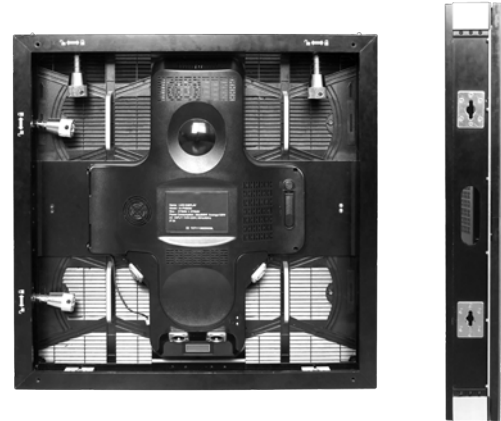

AV6RB2 Rigging Bar

- Single panel rigging bar for AV6X
- Up to 20 panels max vertical

CODE: I226300053



Novastar VX4S


Video Processor/Switchers/Scaler

Specifications

- User Friendly LED Display Controller
- Screen Configuration via on board menu system- No Computer needed.
- Built In Scaler
- Video Input: (1) DP / (1) HDMI / (2) VGA / (1) DVI / (2) CVBS / (1) SDI
- (4) RJ45 Outputs for up to 2.35 million Pixels of LED Control
- (2) USB Type A and (2) USB Type B Ports (1 set on each side)
- Up to 1920 x 1200 p @60Hz Input Resolution
- Multiple Video Signal Format Support
- Cascade Multiple Units Together Via USB
- 19 inch/1U Rack Mountable
- Weight: 5.6 lbs. (2.55 kg)
- INCLUDED CABLES DP,VGA, USB, HDMI, DVI, CAT5, Power



CODE: 1226300067

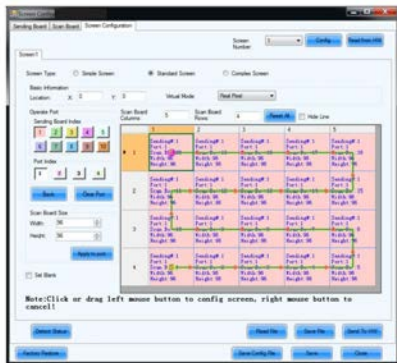

MCTRL300

Video processor

Specifications

- Control Method: USB Interface Via Novastar LCT MARS (PC) & Novastar SmartLCT (MAC)
- Frame Update Frequency: 50-60Hz
- Refresh Rate: 1200Hz
- (2) RJ45 Outputs for up to 1.3 million Pixels of LED Control
- Video Interface: DVI
- Control Distance: Ethernet Cable <100m or Fiber Optic>120m
- Supported Modes: 1280 x 1024, 1024 x 1200, 1600 x 848, 1920 x 712, and 2048 x 668
- Brightness Correction: Pixel, Module, Cabinet
- Requires a computer (sold separately)

CODE: 1226300034

AV PRODUCT ACCESSORIES

First Data Cable

Product Code	Description
1226300039	CAT6S 7,5m AV6 FIRST CABLE
1226300040	CAT6S 15m AV6 FIRST CABLE
1226300041	CAT6S 30m AV6 FIRST CABLE



Data Link Cable

Product Code	Description
1226300048	CAT6 CBL 0,9m
1226300047	CAT6 CBL 1,5m
1226300046	CAT6 CBL 3m
1226300045	CAT6 CBL 4,5m
1226300044	CAT6 CBL 7,5m
1226300043	CAT6 CBL 15m
1226300042	CAT6 CBL 30m



First Power Cable

Product Code	Description
1621000107	MPC PowerCON - CEE 7/7 2m
1621000108	MPC PowerCON - CEE 7/7 5m
1621000109	MPC PowerCON - CEE 7/7 10m
1621000110	MPC PowerCON - UK 2m
1621000111	MPC PowerCON - UK 5m
1621000112	MPC PowerCON - UK 10m



Power Link Cable

Product Code	Description
1621000100	PLC PowerCON link 0,5m STR
1621000101	PLC PowerCON link 1,0m STR
1621000102	PLC PowerCON link 3,0m STR
1621000103	PLC PowerCON link 5,0m STR
1621000104	PLC PowerCON link 10,0m STR
1621000105	PLC PowerCON link 15,0m STR
1621000106	PLC PowerCON link 30,0m STR





MOVING HEADS

NEW! VIZI CMY300

The Vizi CMY300 is ADJ's next generation LED Hybrid moving head. It uses a specially designed 300W LED engine that offers massive output for most large venues and event productions. It is a great hybrid utility fixture as it acts as a beam, spot and wash all-in-one with a massive zoom range from 8 to 46-degrees. This allows for designers to get maximum effects from one fixture without having to crowd truss in an installation with multiple fixtures. It also allows for less fixtures to be packed in a truck for production events. What's more, is it comes in a smaller footprint than most other movers in its class. Plus, the Vizi 300 CMY offers a CMY color mixing so designers can custom make colors to create a one-of-a-kind light-show.

The Vizi CMY300 offers motorized focus, motorized zoom, two rotating prisms (one 6-facet linear & one 3-facet circular), 2 GOBO wheels (1 wheel fixed metal & one wheel rotating/replaceable GOBOs) and built-in WiFly EXR wireless DMX. There is a full color function display on the front panel, with the rear panel offering PowerCON In/Out and 3-pin & 5-pin DMX connections. Under the hood, the Vizi CMY300 offers a modular design making servicing and GOBO replacement easier than ever before.



Specifications

- Light Source: 1x300W LED Engine
- CMY Color Mixing + additional Color wheel with 9 colors (incl CTB, CTO 3200K + UV)
- Gobos: GOBO Wheel 1: 9 Fixed + Open (1 Beam Reducer Gobo) GOBO Wheel 2: 7 Rotating/Replaceable + Open (Size: 26.8mm; Viewable: 20mm)
- Motorized Iris, Focus and Zoom 8 - 46 degrees
- 3 DMX Modes : 24, 26 or 38
- 2 rotating Prisms : 3-facet circular & 6-facet linear, Prism Layering
- 3 Fan Modes : Silent, Auto, Full
- Control: 3-pin and 5-pin DMX, Built-In WiFly EXR wireless DMX
- Pan/Tilt: 540° / 270°
- Shutter: Pulse effect; random strobe slow to fast , Frost Filter
- Electronic Dimming 0-100%
- Power consumption: 398W
- Multi-Voltage Operation: AC 100 - 240V, 50/60Hz
- Life Expectancy: Rated at approximately 50,000 hrs
- Dimensions (LxVxH): 14.75"x12.75"x24.5"/370x325x619mm
- Weight: 51 lbs. / 23 kg.

CODE: I237000175



VIZI HYBRID I6RX


Specifications

- Light Source: Philips® Platinum I6R MSD discharge, 8,000°K
- LUX: 770000 @ 5M, 220000 @ 10M
- Colors: 14 Colors + white, 2 Separate Gobo Wheels: Wheel 1 - 16 static, fixed gobos + spot. Wheel 2 - 12 Colored, interchangeable, rotating Glass Gobos + spot.
- Focus: Motorized
- Zoom: Motorized
- Channel Modes: 19 DMX Channels
- Control: LED DMX 4-Button menu system
- Pan/Tilt: Pan/Tilt Invert, 16-Bit Pan/Tilt positioning, Pan/Tilt speed adjustment
- Shutter: Pulse effect; random strobe slow to fast
- Dimming: Electronic 0% - 100%
- Power consumption: 537W
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz
- Life Expectancy: Rated at approximately 1,500 hr. long life
- Dimensions (LxWxH): 12.75"x14.5"x22.5"/325x370x571mm
- Weight: 23 kg

CODE: 1237000131



Photometric

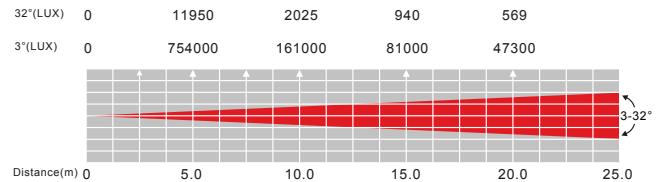

VIZI BSW300


Specifications

- Light Source: 1x300W White LED
- Colors: Color Wheel 1: 7 + Open
- Color Wheel 2: 7+ Open (CTO 3200k), CTC (5600k), UV
- Gobos: GOBO Wheel 1: 6 Fixed + Open (3 Beam Reducers Beam Mode)
- GOBO Wheel 2: 7 Rotating/Replaceable + Open (6 Glass, 1 Metal) Beam Angle: 15-degrees
- Focus: Motorized
- Operational Modes: DMX Modes- 3
- Channel Modes: 17 or 20
- Control: Control: LED DMX 4-Button menu system, 3-pin and 5-pin DMX
- Pan/Tilt: 540° / 270°
- Shutter: Pulse effect; random strobe slow to fast
- Dimming: 0% - 100%
- Power consumption: 398W
- Life Expectancy: Rated at approximately 50,000 hrs
- Dimensions (LxWxH): 14.75"x12.75"x21.5"/376x325x545mm
- Weight: 49 lbs. / 22 kg.

CODE: 1237000167



VIZI BSW 300 COLOR WHEELS



VIZI BSW 300 GOBO WHEELS



VIZI BEAM 5RX


Specifications

- Light Source: Philips® Platinum 5R discharge, 8,000°K
- Colors: 14 Colors + white, CTB + UV and split Colors
- Gobos: 17 static, fixed gobos + spot, gobo shake effect
- Focus: Motorized
- Prism: 8-facet Prism with macros
- Frost: Frost Filter
- Operational Modes: DMX
- Channel Modes: 2 DMX Channel Modes: 16 or 19 DMX Channels
- Beam Angle: 5-degree beam angle
- Dimming: Electronic 0% - 100%
- Strobe: Strobe effect
- Pan/Tilt: 540-degree/270—degree
- Shutter: Pulse effect; random strobe slow to fast
- Connection: 3-pin XLR In/Out
- Control: LED DMX 4-Button menu system
- LUX: 770000 @ 5M, 220000 @ 10M
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz
- Power consumption: 237W
- Life Expectancy: 3,000 hr. long life
- Dimensions (LxWxH): 15.5"x12.75"x20.5"
/394mmx325mmx522mm
- Weight: 42lbs/19 kg.

CODE: I237000119



Photometric

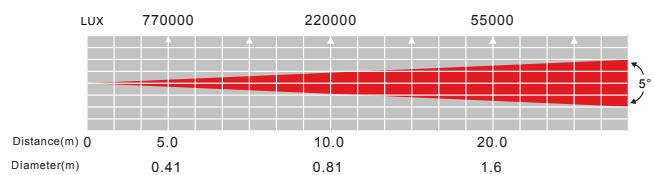

VIZI BEAM RXONE


Specifications

- Light Source: Osram® SIRIUS HRI 100W discharge, 9000°K
- Colors: 14 Colors + white and split Colors
- Gobos: 15 static, fixed gobos + spot
- Prism: 8-facet Prism with macros
- Frost: Frost Filter
- Operational Modes: DMX
- Channel Modes: 2 DMX Channel Modes: 15 or 17 DMX Channels
- Beam Angle: 3-degree beam angle - Auto X-Y repositioning
- Dimming: Electronic 0% - 100%
- Strobe: Strobe effect
- Pan/Tilt: 360-degee standard (540-degree optional)/270-degree
- Shutter: Pulse effect; random strobe slow to fast
- Connection: 3-pin XLR In/Out
- Control: LED DMX 4-Button menu system
- LUX: 99250 @ 10M, 70030 @ 15M
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz
- Power consumption: 199W
- Life Expectancy: 6,000 hr. long-life
- Dimensions (LxWxH): 15.5"x12.75"x20.5"
/394mmx325mmx522mm
- Weight: 42lbs/19 kg.

CODE: I237000146



Photometric

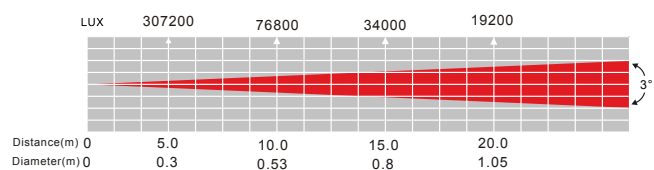




VIZI Q WASH7

Specifications

- Light Source: 7x40W RGBW quad
- Colors: RGBW
- Operational Modes: 2 Operational Modes: Program Mode & DMX Controlled
- Channel Modes: 3 DMX Channel Modes: 17 channels, 19 channels, or 23 channels
- Dimming: Electronic 0% - 100%
- Strobe: Strobe effect
- Pan/Tilt: 630 or 540 degree/ 270-degree
- Connection: 3-pin and 5-pin XLR in/out
- Daisy chain: 5 fixtures max. (110V)/11 fixtures max. (240V)
- Control: LED DMX 4-button menu system
- LUX: 99250 @ 10M, 70030 @ 15M
- Multi-Voltage Operation: 100-240V, 50/60Hz
- Power consumption: 305W
- Life Expectancy: 50,000 hrs.
- Built-in Wifly EXR receiver
- Dimensions (LxWxH): 11.75"x8"x15.75"/300x200x400mm
- Weight: 19 lbs. / 8.5 kgs.

CODE: 1237000166

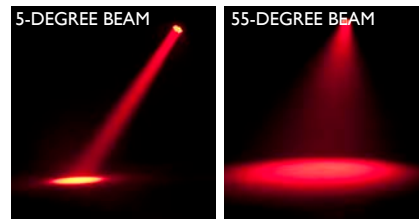

RGBW Color Mixing:




VIZI HEX WASH7

Specifications

- Light Source: 7x15W RGBWA+UV hex (6-IN-1) LEDs
- Colors: RGBWA+UV
- Operational Modes: 2 Operational Modes: Program Mode & DMX Controlled
- Channel Modes: 3 DMX Channel Modes:
- Dimming: Electronic 0% - 100%
- Strobe: Electronic strobe/pulse effect; random strobe slow to fast
- Pan/Tilt: 630 or 540 degree/ 270-degree
- Connection: 3-pin and 5-Pin XLR In/Out
- Daisy chain: 5 Fixtures Max. (110V)/11 Fixtures Max. (240V)
- Control: 4-Button DMX LCD menu with 180° inverse view mode
- Multi-Voltage Operation: 100-230V, 50Hz/60Hz
- Power consumption: 137W
- Life Expectancy: 50,000 hrs.
- Built-in Wifly EXR receiver
- Dimensions (LxWxH): 11.75"x 8"x15.75"/300x200x400mm
- Weight: 19 Lbs. / 8.5 kgs.

CODE: 1237000165

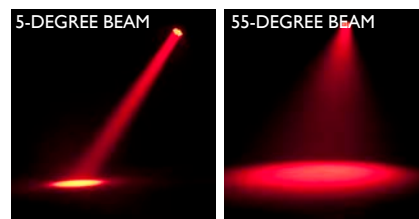

RGBAW Color Mixing + UV:



NEW!

VIZI WASH PRO

Specifications

- Light Source: 19x30W RGBW
- Colors: (4-IN-1) - Red, Green, Blue & White, 3-zone Ring Control with Color Macros, 32 Built-in Color Macros
- Operational Modes: DMX: 3 modes
- Channel Modes: Control Channels: 15, 19 or 36
- Dimming: Electronic 0% - 100%
- Strobe: Electronic Strobe/Pulse effect; random strobe slow to fast
- Pan / Tilt Range: 540° / 270°
- Shutter: Pulse effect; random strobe slow to fast
- Connection: 3-pin and 5-pin DMX
- Control: 4-button Touch Control Panel with Large LED Screen
- Multi-Voltage Operation: 100-240V 50Hz/60Hz
- Power consumption: 725W, 6.03A @ 120V or 700W 3A @ 230V
- Life Expectancy: 50,000 Hour Average LED Life
- Dimensions (LxVxH): 13.25"x17"x21.25"/335x430x541mm
- Weight: 48.5 lbs. / 22 kg.

CODE: I237000185



RGBW Color Mixing:



INNO COLOR BEAM Z19


Specifications

- Light Source: 19x10W RGBW quad Color (4-IN-1) Osram LED
- Colors: RGBW, 64 built-in Color macros
- Operational Modes: DMX
- Channel Modes: 14 DMX Channels
- Zoom: Motorized 10 - 60-degree beam angle
- Beam Angle: 3-degree beam angle - Auto X-Y repositioning
- Dimming: Electronic 0% - 100%
- Strobe: Electronic Strobe/Pulse effect; random strobe slow to fast
- Pan/Tilt: 540-degree/200-degree
- Shutter: Pulse effect; random strobe slow to fast
- Connection: 3-pin XLR In/Out
- Daisy chain: 5 Fixtures Max. (120V) / 11 Fixtures Max (230V)
- Control: 4-Button DMX LCD menu with 180° Inverse View mode
- Multi-Voltage Operation: 100V-230V 50Hz/60Hz
- Power consumption: 245W
- Life Expectancy: 6,000 hr. long-life
- Dimensions (LxVxH): 13"x7.5"x15.75"/329x188x395.4mm
- Weight: 21 lbs./ 9.5Kgs

CODE: I237000083



RGBW Color Mixing:

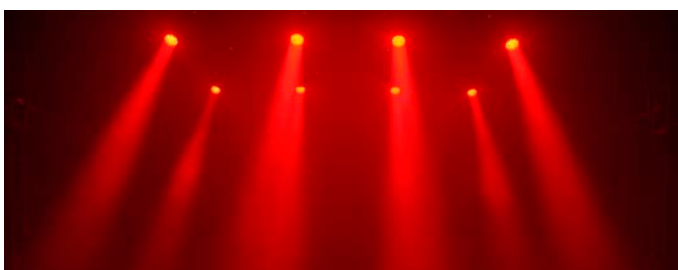

INNO POCKET Z4

Specifications

- Light Source: 4x10W 4-in-1 RGBW LED source
- Colors: RGBW
- Operational Modes: 3 Operational Modes: DMX control, sound active mode & show mode
- Channel Modes: 3 DMX Channel Modes: 16/19/22
- Zoom: Full zoom 10-60 degrees
- Beam Angle: 10 - 60-degrees
- Dimming: Electronic 0% - 100%
- Pan/Tilt: 540°/180°
- Shutter: Pulse effect; random strobe slow to fast
- Connection: DMX via 3-pin XLR cable
- Control: 4-Button DMX LCD menu with 180° Inverse View mode
- Multi-Voltage Operation: AC 100 - 240V, 50/60Hz
- Power consumption: 67W
- Life Expectancy: 50,000 hrs
- Dimensions (LxWxH): 5.5"x6.75"x9.75"/141x174x247mm
- Weight: 7 Lbs. /3.2 kgs.

CODE: 1237000121



UC-IR
(Sold Separately)
1321000074

RGBW Color Mixing:





FOCUS SPOT SERIES
NEXT PAGE

FOCUS SPOT THREE Z/ PEARL



The ADJ Focus Spot Three Z is a 100W LED Moving Head with motorized focus and motorized zoom allowing for a variable beam angle from 12-18-degrees. In addition, ADJ has fitted the Focus Spot Three Z with one rotating GOBO wheel, one fixed GOBO wheel and one color wheel, letting users generate unique patterns and effects in a series of vibrant hues. There are two 6-facet prisms (one circular and one linear), enabling spellbinding multi-beam effects capable of filling wide spaces with color and movement.




Specifications

- Light Source: 1x100W LED Moving Head
- Colors: 8 Colors + Spot
- Operational Modes: 3 Operational Modes: Sound Active, Show Mode, & DMX Controlled
- Channel Modes: 18 & 21 DMX Channel Modes:
- Zoom: Motorized
- Focus: Motorized
- Beam Angle: 12-18-degree
- Dimming: Electronic 0% - 100%
- Strobe: Strobe Rate: 0.3-20HZ
- Pan/Tilt: 16-Bit Fine Pan/Tilt control
- Connection: 3-pin XLR In/Out
- Daisy chain: Power-Con AC In/Out on rear to Daisy chain power (up to 3 Focus Spot Three Z's @ 120V and 6 Focus Spot Three Z's @ 230V)
- Control: 4-Button DMX LCD menu with 180° Inverse View mode
- Multi-Voltage Operation: 100-230V, 50Hz/60Hz
- Power consumption: 230W
- Life Expectancy: Rated at approximately 50,000 hrs
- Dimensions (LxWxH): 7.25"x11.25"x19.75"/183x284x489mm
- Weight: 26 lbs. /12 kgs.

FOCUS SPOT THREE Z CODE: 1237000148
FOCUS SPOT THREE Z PEARL CODE: 1237000158

Photometric

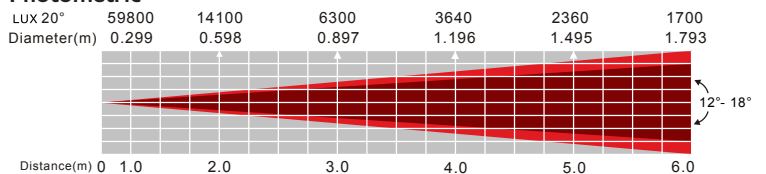


FOCUS SPOT TWO


Specifications

- Light Source: 1x75W Cool White LED & 3W UV LED
- Colors: 8 Colors + Spot & Split Colors
- Operational Modes: 3 Operational Modes: Sound Active, Show Mode, & DMX Controlled
- Channel Modes: 16 & 18 DMX Channel Modes:
- Zoom: Manual
- Focus: Motorized
- Beam Angle: 15-20-degree
- Dimming: Electronic 0% - 100%
- Strobe: Strobe/Pulse effect; random strobe slow to fast
- Pan/Tilt: 16-Bit Fine Pan/Tilt control
- Connection: 3-pin XLR In/Out
- Daisy chain: Power-Con AC In/Out on rear to Daisy chain power (up to 14 Focus Spot Two's @ 120V and 26 Focus Spot Two's @ 240V)
- Control: 4-Button DMX LED menu
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz
- Power consumption: 108W
- Life Expectancy: Rated at approximately 50,000 hrs
- Dimensions (LxVxH): 6.75"x9.25"x15.25"/173x237x385mm
- Weight: 16lbs. /7.3 kgs.

CODE: I237000147

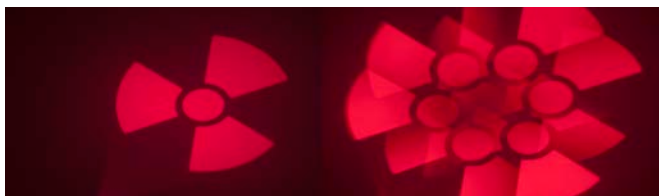

Photometric

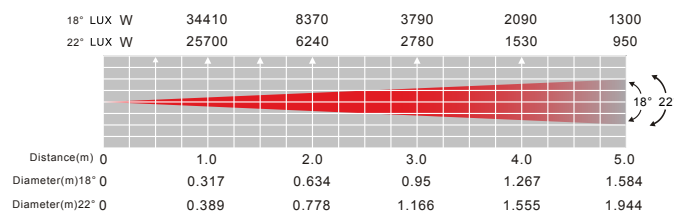

FOCUS SPOT ONE


Specifications

- Light Source: 1x35W LED and 1x3W UV LED
- Colors: 8 Colors + Spot
- Operational Modes: 3 Operational Modes: Sound Active, Show Mode, & DMX Controlled
- Channel Modes: 15 & 17 DMX Channel Modes:
- Focus: Motorized
- Beam Angle: 16-degree beam angle
- Dimming: Electronic 0% - 100%
- Strobe: Strobe/Pulse effect; random strobe slow to fast
- Pan/Tilt: 630-degree/270-degree
- Connection: 3-pin XLR In/Out
- Daisy chain: PowerCONAC In/Out on rear to Daisy chain power (up to 19 Focus Spot One's @ 120V and 35 Focus Spot One's @ 240V)
- Control: 4-Button DMX LED menu with 180° InverseView mode
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz
- Power consumption: 81W
- Life Expectancy: Rated at approximately 50,000 hrs
- Dimensions (LxVxH): 7.75"x8.75"x14.25"/197x221x360mm
- Weight: 12.5 lbs. /5.7 kgs.

CODE: I237000157



Photometric

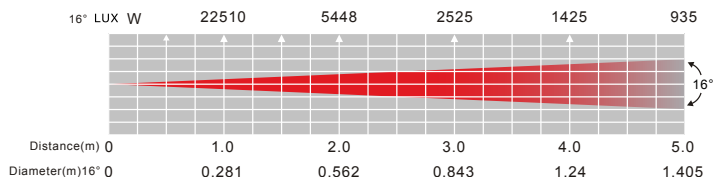

NEW!

POCKET PRO/PEARL

Specifications

- Light Source: 1x25W White LED
- Colors: 7 Colors + white
- Gobos: 7 replaceable gobos + spot, includes kit of 4 additional GOBOs, separate Color & gobo wheels
- Focus: Manual
- Operational Modes: 3 Operational Modes: DMX, Sound Active & Internal Show control modes
- Channel Modes: 11 & 13 Channel Modes:
- Shows: 4 Built-in shows
- Beam Angle: 15-degrees
- Pan/Tilt: 540° pan / 230° tilt (16-bit)
- Shutter: Pulse effect; random strobe slow to fast
- Dimming: 0% - 100%
- Linkable: DMX via 3-pin XLR cable
- Power consumption: 53W
- Multi-Voltage Operation: AC 100 - 240V, 50/60Hz
- Life Expectancy: Rated at approximately 50,000 hrs
- Dimensions (LxVxH): 6.37"x7.87"x11.30"/162x200x287mm
- Weight: 7.3 lbs. / 3.6 kgs.

POCKET PRO CODE: 1237000170
 POCKET PRO PEARL CODE: 1237000178



GOBO REPLACEMENT

INNO POCKET SPOT

Specifications

- Light Source: 1x12W white Cree LED source
- Colors: 7 Colors + white
- Operational Modes: 3 Operational Modes: DMX, Sound Active & Internal Show control modes
- Channel Modes: 2 DMX Channel Modes: 9 & 11 Channel Modes:
- Focus: Manual
- Beam Angle: 13-degrees
- Dimming: 0% - 100%
- Strobe: Pulse effect; random strobe slow to fast
- Pan/Tilt: 540° / 230°
- Connection: DMX via 3-pin XLR cable
- Multi-Voltage Operation: AC 100 - 240V, 50/60Hz
- Power consumption: 26W @ 120V, 27W @ 230V
- Life Expectancy: Rated at approximately 50,000 hrs
- Dimensions (LxVxH): 6.25"x5.75"x10.5"/159mmx147mmx265mm
- Weight: 7 lbs./3 kgs


CODE: 1237000088




UC-IR (Included):
1321000074



Colors/Gobos



Photometric



ASTEROID I200

Specifications


- Light Source: 12x15W 4-IN-1 LED Engine
- Lux: 39,749 max; 9056 Full on @ 2M
- Colors: RGBW (Red, Green, Blue, White)
- Operational Modes: ArtNet/KlingNet, DMX, Sound Active, Stand Alone, Master/Slave
- Channel Modes: 18, 20 and 64 Channels
- Beam Angle: 4-degree Fixed, 11-degree (Field Angle)
- Dimming: 0% - 100%
- Strobe: Electronic 1Hz-20KHz
- Pan/Tilt: Infinite
- Connection: 3-pin and 5-pin
- Multi-Voltage Operation: 100-240V, 50/60Hz
- Power consumption: 226W Max
- Life Expectancy: Rated at approximately 50,000 hrs
- Dimensions (LxWxH): 15.75"x17.75"x13.5"x400x450x600mm
- Weight: 49 lbs/22 kgs

CODE: I237000136



Photometric

R	13024	2836	1288	691	433	(LUX)
G	22173	3111	1976	1103	694	
B	3318	700	294	157	100	
WW	30095	5736	2406	1342	822	
RGBWW	39749	9056	3649	1957	1193	

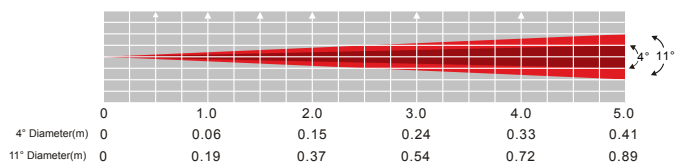


SWEEPER BEAM QUAD LED


Specifications

- Light Source: 8x8W High Output RGBW (Red, Green, Blue, White) LEDs
- Quick sweeping Beam effect with 270° tilt stepper motors and individual LED cell control
- Extremely sharp 3.5° beam angle;
- DMX Channel Modes: : 1, 6, 35, 39
- LED pulse & strobe effect
- 270 degree tilt from smooth Stepper Motors
- 4-Button DMX LED Display
- 3 Operational Modes: DMX controller, Master/Slave & Sound Active
- 3 PIN DMX In/Out
- IEC AC In/Out (Power Daisy chain 8 units @ 110V, 14 units @ 220V)
- Power consumption: .43 Amps @ 110V; .21 Amps @ 220V
- Dimensions (LXWXH): 38.5"x3.0"x5.25"/973x73x132mm
- Weight: 13 lbs/ 6.3 kg

CODE: I237000082

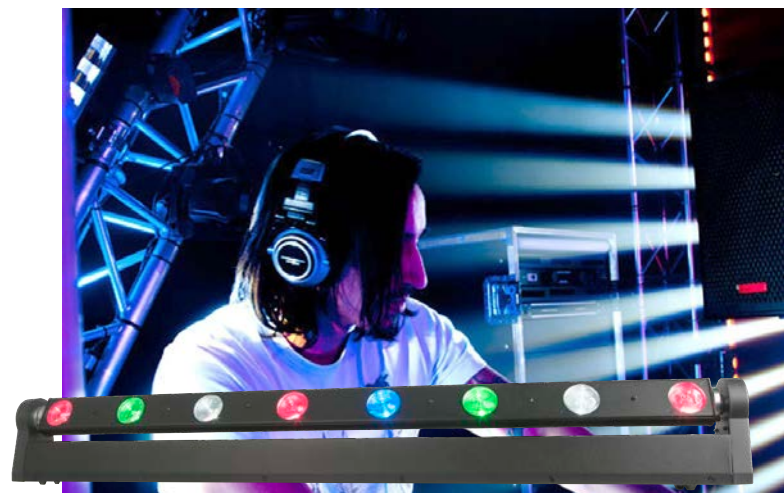

Compatible with
UC3 Series
UC3 Universal
Controller
I321000046

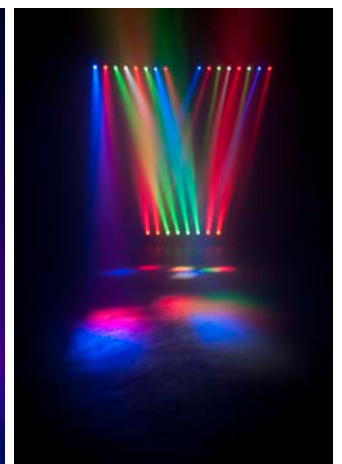

INNO ROLL HP

Specifications

- Light Source: 1x80W High Output White LED Engine, 50,000 Lamp life
- LUX: 2000 @ 2M at 10° beam angle
- Operational Modes: DMX, Master/Slave & Sound Active
- DMX Channels: 9 Channels; 3 Pin In/Out
- Colors: 8 Colors + Open + Split Colors
- Gobos: 6 Rotating, Interchangeable Gobos + spot, 24mm (20mm viewable; metal)
- IEC IN/OUT; Daisy chain up to 6 units @120V, 10 units @ 220V
- Power Draw: 103W Max; .86 Amps @120V, .47 Amps@220V
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Compatible with ADJ UC3 series remotes
- Dimensions (LxWxH): 22.75"x11"x8.25"/578x278x209mm
- Weight: 14 lbs. / 6.4 kg.


CODE: 1237000091



Colors/Gobos



Photometric

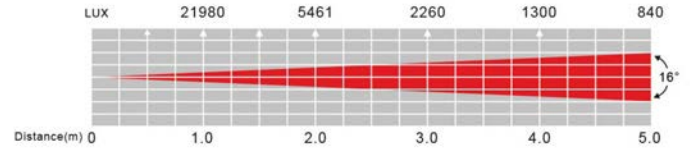

INNO SCAN HP


Specifications

- Light Source: 1x80W High Output White LED Engine, 50,000 Lamp life
- LUX: 5461 @ 2M at 16° beam angle
- Operational Modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX Channels: 9, or 12; 3 Pin In/Out
- Colors: 8 Colors + Open + Split Colors
- Gobos: 6 Rotating, Interchangeable Gobos + spot, 24mm (20mm viewable; metal)
- IEC IN/OUT; Daisy chain up to 6 units @120V, 10 units @ 220V
- Power Draw: 103W Max; .86 Amps @120V, .47 Amps@220V
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Compatible with ADJ UC3 series remotes
- Dimensions (LxWxH): 22.75"x11"x8.25"/578x278x209mm
- Weight: 16 lbs. / 7.3 kg.


CODE: 1237000090



Colors/Gobos



Photometric

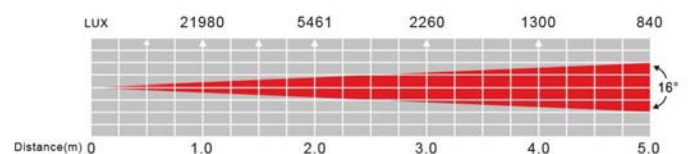

INNO POCKET SCAN

Specifications

- Light Source: 1x12W White LED source (Rated at approximately 50,000 hrs)
- Flat Mirrored Scanner
- Single GOBO/Color wheel: 8 fixed GOBO/Colors + spot/white
- 3 Operational Modes: DMX, Sound Active & Internal Show control modes
- 6 DMX Channels / 12 Built-in shows
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & theatre)
- IEC AC IN/OUT on rear to Daisy chain power
- Optional IR wireless remote control (ADJ UC IR Not Included)
- Power consumption: 33W (Full-On)
- Multi-Voltage Operation: AC 100 - 240V, 50/60Hz
- Dimensions (LxWxH): 11.5"x5.25"x6.5"/294x132x160mm
- Weight: 6 lbs. / 2.4 kgs.

CODE: I237000102




Colors/Gobos



UC-IR (Not Included)
I321000074

Photometric

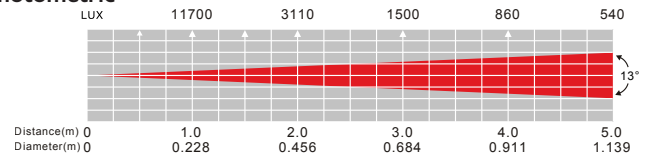

INNO POCKET ROLL

Specifications

- Light Source: 1x12W White LED source (Rated at approximately 50,000 hrs)
- Barrel Mirrored Scanner
- Single GOBO/Color wheel: 8 fixed GOBO/Colors+spot/white
- 3 Operational Modes: DMX, Sound Active & Internal Show control modes
- 6 DMX Channels / 12 Built-in shows
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- IEC AC IN/OUT on rear to Daisy chain power
- Optional IR wireless remote control (ADJ UC IR Not Included)
- Power consumption: 36W (Full-On)
- Multi-Voltage Operation: AC 100 - 240V, 50/60Hz
- Dimensions (LxWxH): 13"x5.25"x6.5"/329x132x165mm
- Weight: 6 lbs. / 2.6 kgs.

CODE: I237000103




Colors/Gobos



UC-IR (Not Included)
I321000074

Photometric

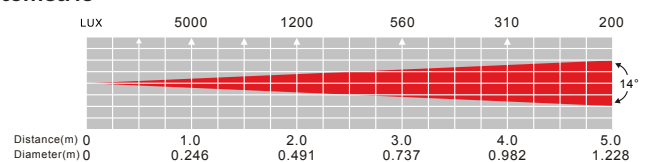

3D VISION PLUS



Specifications

- Light Source: 72 Pieces 3-in-1 RGB LEDs
- Beam Angle: 180 Degrees
- Distinctive hexagonal-shaped LED panel is divided into three separate sections in a way that gives it a unique three-dimensional appearance.
- Safety hook on rear panel
- M10 thread on rear panel to connect a clamp to secure to a pipe
- Wall mount slots on rear panel
- 3 Operating Modes: Sound Active Mode (with Sound Sensitivity Adjustment), Auto Run Mode (16 Programs with Speed Adjustment), DMX Control
- 3 DMX Channel Modes: 3, 9, and 13 Channel Mode
- Master/Slave Set Up
- 4-Button Menu with Digital Display
- PowerCON In/Out to Daisy chain power
- RJ45 In/Out DMX protocol
- Input Voltage: AC 100-250V, 50/60Hz
- Dimensions (LxVxH): 3.16"x15.93"x13.80"/80.5x404.7x350.7mm
- Weight: 6 lbs./ 2.74Kgs.
- Approvals: ETL, ETLIC, CE

CODE: 1226300069



3D VISION PL

3D Vision Plus accessory that quickly locks/unlocks two panels together



CODE: 1226300063



3D VISION RBI

Metal rigging bar for the ADJ 3D Vision Plus

CODE: 1226300062

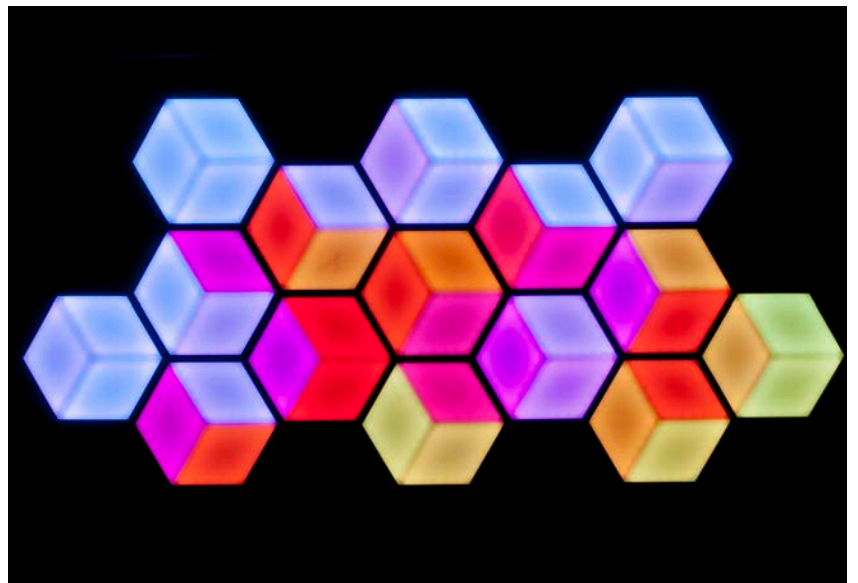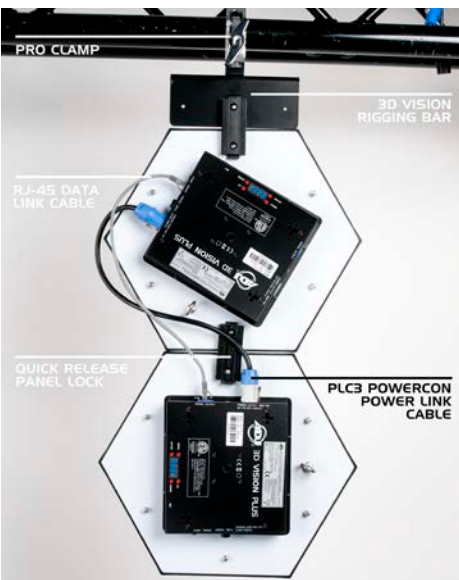


ULTRA KLING BARI8

Specifications

- Light Source: 18x3W Tri LEDs Pixel Bar
- 5 Operational Modes: DMX, Sound Active, Auto, Kling Net, Master/Slave
- DMX Channel Modes: 3, 4, 6, 8, 9, 15, 54; 3-pin In/Out
- Built-In Programs & Color Macros
- RJ45 In/Out Kling Net & Art Net
- Electronic Dimming 0-100%
- Kling Net & Art-Net Control available
- Individual Pixel Control
- Power consumption: 98W @ full on
- Power Connection: IEC AC In/out
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 43.5"x3.25"x4.5" / 1100x80x116mm
- Weight: 13 lbs / 6 kgs

CODE: I222300016

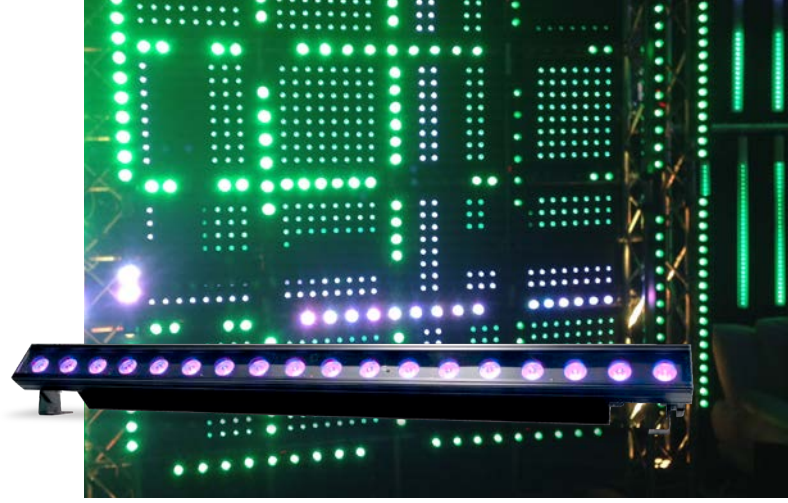


RGB Color Mixing:



Photometric

R	712	318	161	105	67	(LUX)
G	696	283	147	85	52	
B	638	291	138	79	48	
RGB	1750	816	393	239	157	



EZ KLING

Specifications

- DMX 512, KlingNet™, Art-Net 3™ Multicast and Unicast, sACN
- (4) Button Control Panel and LCD Menu Display and Lockout Feature
- (6) Bare Wire Terminal Block
- (1) 3pin DMX Input / Output
- (2) RJ45 Bilateral CAT5e Ports
- (1) 5VDC Power Supply Input
- Length: 5.31" (134.9mm)
- Width: 4.92" (125mm)
- Vertical Height: 1.61" (40.9mm)
- Weight: 0.95 lbs. (0.43kg)
- 5VDC
- 5W Max Power consumption
- 5VDC Power Supply
- Flex Pixel Tape Jumper First Cable
- Back Panel Magnet for Easy Metal Surface Mounting
- Mini Omega Bracket For Clamp/Truss Mounting

CODE: I321000070





**WIFLY, IP & BATTERY
POWERED FIXTURES**

7PZ IP

Specifications

- Light Source: 7x15W QUAD
- Colors: 64 built-in Color Macros
- Channel Modes: 4 DMX Channel Modes: 5, 7, 8, or 12 Channel Modes:
- Operational Modes: RGBW Dimmer Mode; Auto Run; Color Fade; Static Color Mode; and DMX Controlled
- Beam Angle: Variable beam angle (7 - 45-degrees)
- Electronic Dimming: 0 - 100%
- Control: 4-button DMX menu display on rear panel
- Connection: Linkable via 3-pin IP cable (In/Out)
- Daisy chain: PowerCON TRUE1 AC IN/OUT outlets on rear to Daisy chain power (up to 15 units)
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Power Draw: 128W
- Dimensions: 10.5" x 13.75" x 15" / 270 x 350 x 380mm
- Weight: 25 lbs. / 11 kg.


CODE: 1226100332



RGBW Color Mixing:



Photometric

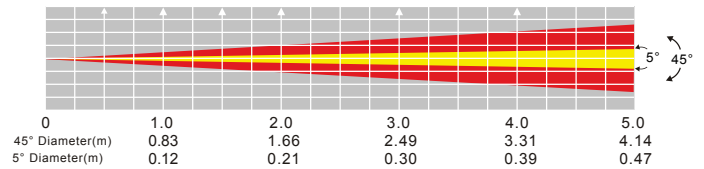

WIFLY EXR QAS IP

Specifications

- Light Source: 5x5W QUAD LEDs
- Colors: 16 Color Change Modes, 16 Color Fade Modes, 64 built-in Color Macros
- Channel Modes: 5 DMX Channel Modes: 4, 5, 6, 10 or 11 Channel Modes:
- Operational Modes: 6 Operational Modes: Static Color; RGBA Dimmer Mode; Color Change; Color Fade; Auto Run (Program Run); and DMX Controlled
- Beam Angle: 25-degree
- Electronic Dimming: 0 - 100%
- Control: 4-button DMX menu display on rear panel
- Connection: Linkable via 3-pin IP cable (In/Out)
- Daisy chain: 4-Pin Power AC IN/OUT outlets on rear to Daisy chain power (up to 11 units)
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Power Draw: 50W
- Battery Life: 5 Hours Full On, 10 Hours in Energy Save Mode (With Full Charge)
- Dimensions: 12.25" x 11" x 7.5" / 310 x 280 x 194mm
- Weight: 12 lbs. / 5.48 kg.


CODE: 1226100292

RGBA Color Mixing:



Photometric

R	D25	1596	676	362	170	130	(LUX)
G	D25	2130	685	329	177	117.3	
B	D25	2210	641	277	121.7	78.4	
A	D25	2170	633	399	170	106.9	
RGBA	D25	8200	2480	1078	554	357	



WiFLY EXR HEX5 IP

Specifications

- Light Source: 5x10W Hex LEDs
- Colors: 16 Color Change Modes, 16 Color Fade Modes, 63 built-in Color Macros
- Channel Modes: 5 DMX Channel Modes: 6, 7, 8, 11 or 12 Channel Modes:
- Operational Modes: 6 Operational Modes: Static Color; RGBWA+UV Dimmer Mode; Color Change; Color Fade; Auto Run (Program Run); and DMX Controlled
- Beam Angle: 40-degree
- Electronic Dimming: 0 - 100%
- Control: 4-button DMX menu display on rear panel
- Connection: Linkable via 3-pin IP cable (In/Out)
- Daisy chain: 4-Pin Power AC IN/OUT outlets on rear to Daisy chain power (up to 10 units)
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Power Draw: 50W
- Battery Life: 5 Hours Full On, 8 Hours in Energy Save Mode (With Full Charge)
- Dimensions (LxWxH): 10.5"x9.5"x6.5"/310x280x194mm
- Weight: 5.48 kg.

CODE: 1226100293




Compatible with
ADJ RFC
(Sold Separately)
1223200026

RGBAW Color Mixing + UV:



Photometric

R	D40	971	237	97.8	48.9	32.1	(LUX)
G	D40	951	257	108.5	55.7	37.5	
B	D40	815	217	85	53.1	31.7	
W	D40	1190	302	113.8	67.6	42.3	
A	D40	574	140	50.6	28.9	17.6	
UV	D40	179	47.7	18.3	10.9	6.5	
ROBAWUV	D40	4240	966	449	241	154.5	



WiFLY EXR QAI2BAR IP

Specifications

- Light Source: 12x5W QUAD LEDs
- Colors: 4-in-1 RGBA
- Channel Modes: 7 DMX Channel Modes: 4, 6, 7, 8, 9, 12 and 14
- Operational Modes: Color Change; Color Jumping; Color Dreaming; Auto (Program Run); WiFLY and DMX Controlled
- Beam Angle: 25-degree
- Electronic Dimming: 0 - 100%
- Control: 4-button DMX Menu display on rear
- Connection: Linkable via 3-pin IP cable (In/Out)
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Power Draw: 75W
- Dimensions (LxWxH): 40.5"x5.5"x6"/1030x140x155mm
- Weight: 6.4 kg.

CODE: 1226100294




Compatible with
ADJ RFC
(Sold Separately)
1223200026

RGBA Color Mixing:



Photometric

R	D25	1676	925	557	373	252	(LUX)
G	D25	1581	806	466	291	197	
B	D25	1880	827	441	293	200	
A	D25	871	544	264	160	101	
RGBA	D25	5120	2350	1435	874	496	



WiFLY EXR BATTERY

Specifications

- Battery powered wireless DMX transceiver (transmitter/receiver in one)
- Battery life and WiFLY wireless signal strength indicators on side panel
- Compatible with all ADJ WiFLY products
- Up to 2500 wireless feet (open line of sight)
- One transmitter can send to many receivers using the same radio channel
- Receivers automatically listen for transmitters (no pairing required)
- Supports up to 16 DMX-512 universes
- Dip Switches to select from 16 different radio channels (one DMX universe per channel)
- 3-pin & 5-pin DMX In/Out
- Wireless Frequency: 2.4 GHz DSSS
- Power Supply: DC 9-12V (AC or DC powered)
- Battery Charge Time: 4 Hours
- Battery Life: 20-25 Hours (At Full Charge)



- Signal Range: 2500 Feet
- Dimensions (LxWxH): 6"x5.5"x2.5"/148x135x62mm
- Weight: 2 lbs. / 0.75 kg.

CODE: I226100295

WiFLY NE1

Specifications

- DMX Controller with ADJ's WiFLY Transceiver Wireless DMX on-board.
- Control up to 12 individual fixtures
- Control most DMX products that consist of 34 DMX Channels or less
- Built-in effects generator for LED's and Moving Lights
- 12 Memories via 2 banks
- 4 Rotary Encoders for Channel & Function Control
- Master Dimmer Fader Control
- Strobe Rate Fader Control
- 6 Mode buttons (Fixture, Color, Gobo, Effect, Show, & Pause)
- 12 Multi-function buttons
- Blackout button
- Universal USB Port (USB Stick Included)
- DMX output connector: 3-pin XLR
- Power In: 9-12V DC min 300mA UL approved power supply (Included)
- Power consumption: 3.6 Watts
- Dimensions (LxWxH): 12.8"x7.25"x2.75"/325x185x68.7mm
- Weight: 4.4 lbs./2 kgs.



CODE: I226100296

WiFLY RGBW8C

Specifications

- Compact DMX-512 controller for RGB, RGBW and RGBA LED fixtures.
- Up to 8 channels can individually be controlled per fixture button.
- Built-In Wifly Transceiver, which will allow you control all Wifly compatible light fixtures wirelessly. (Can also be hard wired via 3 pin DMX cables)
- Built in RGB Fade, Auto program, Color Macro, Chase Programs
- 16x Operating Frequencies
- 4 Faders for manual RGBW or RGBA 4 channel control
- 3 user programmable Color preset, direct access buttons
- 9 Color preset/Chase program direct access buttons
- Sound active mode via internal microphone
- Power consumption: 3.6 Watts
- Dimensions (LxWxH): 13"x5.75"x2"/327x140x48mm
- Weight: 3 lbs. (1.3 kgs.)



CODE: I226100258



ADJ (Hochleistungs-Logik-Beleuchtung)
**WASH
LIGHTING**



DOTZ MATRIX

Specifications

- Light Source: 16x30W COB Tri RGB LEDs in a 4x4 Matrix Panel
- Operational Modes: DMX, Manual RGB Mode, Static Color & Sound Active
- DMX Channels: 3,6,7, 48 or 52; 3 & 5 Pin In/Out
- Electronic Dimming: 0 - 100%
- Beam Angle: 60 degrees for wide coverage
- Built-In preset Colors and programs
- 5 selectable Dim Curves (Standard, Stage,TV,Architectural & Theatre)
- PowerCON AC IN/OUT; Daisy chain up to 5 units @ 120V, 9 units @ 220V
- Power Draw: 430W Max; 3.91 Amps @ 120V, 1.95 Amps@220V
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions (LxWxH): 13.75"x6.75"x14.75"/ 345x170x370mm
- Weight: 18 lbs. / 7.8 kg.

CODE: I215200023


RGB Color Mixing:



Photometric

Beam Angle 60°	R	2130	681	302	197	136	(LUX)
	G	3050	793	398	246	173	
	B	4730	1405	716	368	224	
	RGB	10140	1405	1360	730	476	
	Spot Diameter		2.65	3.75	4.90	6.05	(CM)

Field Angle 80°	R	974	270	114	66	45	(LUX)
	G	1444	405	185	109	71	
	B	2010	574	270	154	101	
	RGB	3370	1011	475	265	171	
	Spot Diameter		3.65	5.33	7.00	8.70	(CM)



DOTZ TPAR SYSTEM

Specifications

- COB LED Par Wash System with 4 Par fixtures
- 4 Operational Modes: Sound Active, Auto Run, Master/Slave & DMX Controlled
- 15 Built-in Programs
- 5 DMX Channel Modes: 3, 5, 9, 12 and 18 channels
- Digital DMX Display with 4-button menu for easy navigation
- 3-Pin DMX In/Out
- Strobe & Pulse LED Effect
- Electronic Dimming: 0-100%
- 5 selectable Dim Curves (Standard, Stage,TV,Architectural & Theatre)
- Beam angle: 90-degree
- Includes 25-degree beam angle lens kit
- Long Life LEDs (Rated at approximately 50,000 hrs.)
- Foot Controller Features: Mode, Black Out and Program Change
- Light Source: Each fixture has 1x 30-Watt TRI Color COB LEDs
- LUX @ 3M: 1345
- Power Draw: 144W Max (entire system)
- Multi-Voltage Operation: AC 100V-240V 50/60Hz (IEC Input)
- Dimensions (LxWxH): 1000 x 285 x 96mm
- Weight: 16 kg. (Fixture Bar, Stand & Controller)

CODE: I223200031




System Includes

- 4x COB LED Par Wash Fixtures
- 1x Lighting Stand
- 1x RF Remote Control
- 1x Wired Foot Controller
- 1x Stand Bag
- 1x Soft case for lighting system

Photometric

Beam Angle 25°	R	2400	749	360	206	138	(LUX)	
	G	2760	904	427	249	161		
	B	4130	1357	646	96	246		
	RGB	8650	2680	1345	372	506		
	Spot Diameter		0.65	1.08	1.83	1.97	2.41	(CM)

Field Angle 30°	R	2400	749	360	206	138	(LUX)	
	G	2760	904	427	249	161		
	B	4130	1357	646	96	246		
	RGB	8650	2680	1345	372	506		
	Spot Diameter		0.83	1.45	2.10	2.70	3.35	(CM)



NEW! ENCORE FR150Z

Specifications

- Light Source: 1x130W LED engine
- CRI: 95.9
- Color temperature: 3000K
- Beam Angle: 8-50 degrees
- Dimming: 16-bit Dimming 0-100%
- Zoom: Manual Zoom control: 8-50 degree
- Channel Modes: 4 DMX modes: 1,2,3,4
- Control: 4-button LCD menu
- Connection: 3-pin & 5-pin DMX In/out
- Daisy chain: PowerCON In/Out to Daisy chain power -7
Fixtures Max. @ 120V
14 Fixtures Max. @ 230V
- Power consumption: 150W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxVxH): With Barn Doors: 16.62"x11.76"x-
16.38"/422.23x298.62x 416mm
Without Barn Doors: 10.87"x11.76"x16.38"/276x298.62x416mm
- Weight: 16.5 lbs./ 7.4 Kgs. (w/ Barn Door)
15.1 lbs./ 6.8 Kgs. (w/o Barn Door)

CODE: I237000174



NEW! ENCORE FR50Z

Specifications

- Light Source: 1x50W LED engine
- CRI: 96.9
- Color temperature: 3000K
- Beam Angle: 8-50 degrees
- Dimming: 16-bit Dimming 0-100%
- Zoom: Manual Zoom control: 8-50 degree
- Channel Modes: 4 DMX modes: 1,2,3,4
- Control: 4-button LCD menu
- Connection: 3-pin DMX In/out
- Daisy chain: PowerCON In/Out to Daisy chain power -20
Fixtures Max. @ 120V
40 Fixtures Max. @ 230V
- Power consumption: 50W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxVxH): With Barn Doors: 13.38"x
9.37"x11.74"/339.8 x 238.05 x 298.25mm
Without Barn Doors: 9.17"x9.37"x-
11.74"/232.8x238.05x298.25mm
- Weight: 9.5 lbs./ 4.3 Kgs. (w/ Barn Door)
8.5 lbs./ 3.8 Kgs. (w/o Barn Door)

CODE: I237000173



NEW!

PAR Z100 5K

Specifications

- Light Source: 1x100W COB LED Cool White
- LUX: 7874 (9°); 4900 (15°); 2467 (20°); 1397 (25°); 896 (30°)
- CRI: 90
- Color temperature: 5700K
- Beam Angle: 9, 15, 20, 25 Or 30-degree (manual adjustment)
- Dimming: 0 - 100% with 5 dimming curves
- Zoom: Manual
- Channel Modes: 3 DMX Modes : 1,2 or 3 DMX Channels
- Control: 4-button DMX menu display on rear panel
- Connection: DMX: 5-pin DMX In/Out
- Daisy chain: 15 fixtures (120V); 25 fixtures (230V)
- Power consumption: 115W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Life Expectancy: rated at 50,000hrs
- Dimensions (LxWxH): 19.33"x10.82"x8.75"/491x275x224mm (with Bracket)
- Weight: 8 Lbs. / 3.6 kgs.

CODE: I226100343



NEW!

PAR Z100 3K

Specifications

- Light Source: 1x100W COB LED Warm White
- LUX: 7135 (9°); 4440 (15°); 2236 (20°); 1266 (25°); 812 (30°)
- CRI: 91.8
- Color temperature: 3000K
- Beam Angle: 9, 15, 20, 25 Or 30-degree (manual adjustment)
- Dimming: 0 - 100% with 5 dimming curves
- Zoom: Manual
- Channel Modes: 3 DMX Modes : 1, 2 or 3 DMX Channels
- Control: 4-button LCD menu
- Connection: DMX: 5-pin DMX In/Out
- Daisy chain: 15 fixtures (120V); 25 fixtures (230V)
- Power consumption: 115W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 19.33"x10.82"x8.75"/491x275x224mm (with Bracket)
- Weight: 8 Lbs. / 3.6 kgs

CODE: I226100342



NEW!

PAR ZPI00 3K

Specifications

- Light Source: 1x100W COB LED Warm White
- LUX: 7135 (9°); 4440 (15°); 2236 (20°); 1266 (25°); 812 (30°)
- CRI: 91.8
- Color temperature: 3000K
- Beam Angle: 9, 15, 20, 25 Or 30-degree (manual adjustment)
- Dimming: 0 - 100% with 5 dimming curves
- Zoom: Manual
- Channel Modes: 3 DMX Modes : 1, 2 or 3 DMX Channels
- Control: 4-button LCD menu
- Connection: DMX: 5-pin DMX In/Out
- Daisy chain: 15 fixtures (120V); 25 fixtures (230V)
- Power consumption: 115W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 19.5"x10.75"x10.75"/491x272x273mm(with Bracket)
- Weight: 7.5 lbs. / 3.4kg.

CODE: I226100346




COB CANNON WASH/PEARL

Specifications

- Light Source: 1x150W COB Quad LED
- Color: RGBA Mixing
- Beam Angle: 80 Degrees (Optional 40° & 50° Lenses Included)
- Dimming: 0 - 100% with 5 dimming curves
- Channel Modes: 7 DMX Modes: 3 Channel Mode, 4 Channel Mode, 5 Channel Mode, 6 Channel Mode, 7 Channel Mode, 9 Channel Mode, & 10 Channel Mode
- Control: 4-button DMX menu display on rear panel
- Connection: DMX: 5-pin DMX In/Out
- Daisy chain: 5 Fixtures Max
- Power consumption: 132W
- Multi-Voltage Operation: 100V-240V/50-60Hz
- Dimensions (LxWxH): 16.25"x9.75"x7.5"/415x245x192mm
- Weight: 9 lbs./ 4.1Kgs

COB CANNON WASH CODE: 1223200039

COB CANNON WASH PEARL CODE: 1223200042



RGBA Color Mixing:




Photometric

Beam Angle	0.4375	0.875	1.75	2.625	3.50	4.375	
R	10650	2530	611	289	168	111	(LUX)
G	8490	1869	511	226	130	91	
B	8540	1950	545	242	135	95	
A	3110	997	253	113.8	61.1	39.1	
RGBA	25900	7320	1970	810	474	297	

Beam Angle	0.53	1.06	2.12	3.18	4.24	5.30	
R	5780	1475	393	170.8	98.5	65.4	(LUX)
G	4760	1360	335	154.4	90.5	58.8	
B	4800	1454	372	172.8	96.4	64.9	
A	2480	892	191	85.4	48.8	31.4	
RGBA	24300	5240	1472	681	373	240	

Beam Angle	1.01	2.02	4.04	6.06	8.08	10.1	
R	3900	975	247	112.5	66.3	44.7	(LUX)
G	3650	853	219	103.8	60.5	39.1	
B	3660	926	246	110.4	65.9	42.5	
A	2350	689	159.3	67.9	37.2	25.1	
RGBA	12360	3590	996	549	238	159.9	



COB CANNON WASH DW

Specifications

- Light Source: 1x150W COB LED
- Color: Warm White/Cool White
- Beam Angle: 80 Degrees (Optional 40° & 50° Lenses Included)
- Dimming: 0 - 100%
- Channel Modes: 6 DMX Channel Modes: (1, 2, 3, 4, 5, & 6 Ch.)
- Control: 4-button DMX menu display on rear panel
- Connection: DMX: 5-pin DMX In/Out
- Daisy chain: 5 Fixtures Max
- Power consumption: 132W
- Multi-Voltage Operation: AC 100V/60Hz - 240V/50Hz
- Dimensions (LxWxH): 16.25"x9.75"x7.5"/415x245x192mm
- Weight: 9 lbs./4.1Kgs

CODE: 1223200045



BARNDOR WH FOR COB CANNON WASH

Specifications

- Barndoor for COB Cannon Wash
- Dimensions : 205 x 205mm

CODE: 1223200048



BARNDOR BLK FOR COB CANNON WASH

Specifications

- Barndoor for COB Cannon Wash & COB Cannon Wash DW
- Dimensions : 205 x 205mm

CODE: 1223200047



DOTZ PAR

Specifications

- Light Source: 1x36W COB TRI LED
- Colors: RGB
- Beam Angle: 60-degrees (25-degrees with supplied lens kit)
- Dimming: Electronic 0 - 100%
- Channel Modes: 4 DMX Channel Modes: 3, 4, 5 or 9 channel
- Operational Modes: 5 Operational Modes: Auto Run, Sound Active, Color Macro, Dimmer, and DMX Controlled Mode
- Control: 4-button LCD DMX display on rear panel
- Connection: 3-pin XLR chassis mount connectors for DMX linking
- Daisy chain: IEC AC IN/OUT to Daisy chain power (up to 13 Dotz Par's @ 110V and 28 Dotz Par's @ 230V)
- Power consumption: 36W
- Multi-Voltage Operation: AC 100V/60Hz - 240V/50Hz
- Life Expectancy: 50,000hrs
- Dimensions (LxWxH): 209x222x114mm(with bracket) 165 x 165 x 114mm (without bracket)
- Weight: 5lbs./2Kgs.

CODE: 1223200032

RGB Color Mixing:



Compatible with: Dotz PAR RF remote (Sold Separately) 1223200035



DOTZ PAR 100

Specifications

- Light Source: 1x100W COB TRI LED
- Colors: RGB
- Beam Angle: 80-degrees (25-degrees with supplied lens kit)
- Dimming: Electronic 0 - 100%
- Channel Modes: 4 DMX Channel Modes: 3, 4, 5 or 9 channel
- Operational Modes: 5x Operational Modes: Auto Run, Sound Active, Color Macro, Dimmer, and DMX Controlled Mode
- Control: 4-button LCD DMX display on rear panel
- Connection: 3-pin XLR chassis mount connectors for DMX linking
- Daisy chain: IEC AC IN/OUT to Daisy chain power (up to 9 Dotz Par 100's @ 110V and 19 Dotz Par 100's @ 230V)
- Power consumption: 115W
- Multi-Voltage Operation: 100V-240V 50Hz/60Hz
- Life Expectancy: 50,000hrs
- Dimensions (LxWxH): 8"x5.75"x8"/203x146x203mm (W/O Bracket) 10"x5.75"x11"/ 254 x 146 x 280mm (With Bracket)
- Weight: 6.8lbs.

CODE: 1223200038



Compatible with: Dotz PAR RF remote (Sold Separately) 1223200035



NEW! I8P HEX



The ADJ I8P Hex is an all metal, powerful 216W LED Par fixture with 18x 12-Watt, 6-IN-1 HEX LEDs. With a 30-degree beam angle, users may produce wide washes with smooth color mixing from 63 built-in color macros utilizing red, green, blue, amber, white and UV LEDs. Not only is this LED Par great for lighting stages, but with its patent pending, intelligently designed, power and DMX connectors, it's great for uplighting large venues.



RGBAW Color Mixing + UV: 




Specifications

- Light Source: 18x12W Hex LED
- Colors: RGBAW + UV
- Beam Angle: 25 degree
- Dimming: Electronic 0 - 100%
- Channel Modes: 4 DMX Channel Modes: 6, 7, 8 and 12
- Operational Modes: 5 Operational Modes: Manual Color; Color Fade; Auto Program; Sound Active, and DMX modes
- Control: 4-button Digital Display for easy navigation
- Connection: 3-pin DMX, PowerCON IN
- Daisy chain: 4 Fixtures Max. (120V) 8 Fixtures Max. (240V)
- Power consumption: 154W
- Multi-Voltage Operation: 100-240V 50Hz/60Hz (Auto Sensing)
- Life Expectancy: 50,000hrs
- Dimensions (LxWxH): 12"x6.75"x13.5"/300x170x340mm
- Weight: 12 lbs/5.4 kg.

CODE: I226100333

Photometric

	1M	2M	3M	4M	5M
Red LEDs	2091	620	286	164	106
Green LEDs	6203	1537	675	381	240
Blue LEDs	1056	267	116	63	38
White LEDs	4813	1352	622	361	226
Amber LEDs	2046	535	230	133	83
UV LEDs	1126	265	116	76	60
Full LEDs	15300	4140	1846	1069	702

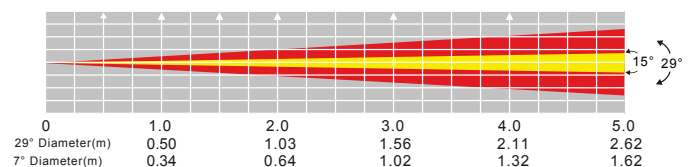

I2P HEX/PEARL

Specifications

- Light Source: 12x12W LEDs
- Colors: RGBAW + UV
- Beam Angle: 30-degree
- Dimming: Electronic 0 - 100%
- Channel Modes: 4 DMX Modes: 6, 7, 8, & 12 channel
- Operational Modes: 5 Operational Modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- Control: 4-button, DMX digital display on rear panel
- Connection: 3-pin DMX, PowerCON IN
- Daisy chain: 4 Fixtures Max. (120V) 8 Fixtures Max. (240V)
- Power consumption: 154W
- Multi-Voltage Operation: AC 110-250V, 50/60Hz (IEC power In/ Out)
- Life Expectancy: 50,000hrs
- Dimensions (LxWxH): 12"x6.75"x13.5"/300x170x340mm
- Weight: 12 lbs / 5.4 kg.

I2P HEX CODE: I226100290
I2P HEX PEARL: I226100312




Compatible with:
Dotz PAR RF remote
(Sold Separately)
I223200035

RGBAW Color Mixing + UV:



Photometric

R	1024	312	150	85	55	
G	2180	641	305	172	112	
B	2990	305	376	217	135	
W	3620	810	428	247	162	
A	1195	961	179	104	70	
UV	442	384	63	36	26	
RGBAWUV	10890	2770	1330	733	455	(LUX)



5P HEX/PEARL

Specifications

- Light Source: 5x10W LEDs
- Colors: RGBAW + UV
- Beam Angle: 30-degree
- Dimming: Electronic 0 - 100%
- Channel Modes: 4 DMX Modes: 6, 7, 8, & 12 channel
- Operational Modes: 5 Operational Modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- Control: 4-button, DMX digital display on rear panel
- Connection: Data linkable via 3-pin XLR cables
- Daisy chain: 8x5P Hex's Max @ 100V, 21x 5P Hex's Max @ 240V.)
- Power consumption: 60W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz (IEC power In/ Out)
- Life Expectancy: 50,000hrs
- Dimensions (LxWxH): 9"x 8.5"x4.75"/224 x 213 x 120mm
- Weight: 5lbs./ 2.02kgs.

5P HEX CODE: I226100279
5P HEX PEARL CODE: I226100291




Compatible with:
Dotz PAR RF remote
(Sold Separately)
I223200035

RGBAW Color Mixing + UV:



Photometric

R	562	152	70	40	27	
G	1121	300	136	76	49	
B	1030	283	130	75	48	
W	1544	410	187	101	66	
A	387	100	45	28	20	
UV	313	81	37	21	14	
RGBAWUV	4420	1220	561	318	210	(LUX)



ULTRA HEX PAR3

Specifications

- Light Source: 3x10W LEDs
- Colors: RGBAW + UV
- Beam Angle: 40-degree
- Dimming: Electronic 0 - 100%
- Channel Modes: 5 DMX Modes: 6, 7, 8, 11 & 12 channel
- Operational Modes: 5 Operational Modes: Static Color, Dimmer, Auto Run, Sound Active and DMX Controlled
- Control: 4-button, DMX digital display on rear panel
- Connection: Data linkable via 3-pin XLR cables
- Daisy chain: Power linkable via IEC power cables. (20 Ultra Hex Par3's Max.)
- Power consumption: 26W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz (IEC power In/Out)
- Life Expectancy: 50,000hrs
- Dimensions (LxWxH): 9"x8.5"x4.75"/224x213x120mm
- Weight: 5lbs./2.02kgs


CODE: I226100274

RGBAW Color Mixing + UV: 



Photometric

R	460	125	56	31	20	(LUX)
G	451	128	55	31	21	
B	359	106	47	27	17	
W	624	174	78	41	26	
A	261	70	29	17	9	
UV	87	21	10.1	5.7	3.8	
RGBAWUV	1947	561	251	140	91	



HEXCON

Specifications

- Compact DMX controller for ADJ HEX series products
- Control up to 6 individual, RGBWA+UV LED fixtures or fixture groups
- 6 user programmable presets, direct access buttons
- 24 Color preset direct access buttons
- 6 multi-function faders
- Color Macro playback mode
- Manual RGBWA+UV intensity control mode
- Color Fade Mode, Color Chase Mode, Auto Run, Sound Active, and Strobe functions.
- On the fly Speed & Fade control of all chase programs
- Sound active mode via internal microphone
- Adjustable microphone sensitivity
- Variable strobe
- Blackout button
- DMX output connector: 3-pin XLR
- USB phone port (Charges most mobile phones)
- Power In: 12VDC 500mA UL approved power supply (Included)
- Power consumption: 3.6 Watts
- Dimensions (LxWxH): 14.2"x5.25"x2.5"/361x185x65mm
- Weight: 1.74kg

CODE: I321000077



MEGA QA GO

Specifications


- Light Source: 5x4W LEDs
- Colors: RGBA
- Beam Angle: 40-degree
- Dimming: Electronic 0 - 100%
- Channel Modes: 8 DMX Channel Modes: 1, 2, 3, 4, 5, 6, 7 or 8 Channel Modes:
- 5 Operational Modes: Auto Run Mode (16 Color Change Mode, 16 Color Fade Modes, & 1 Combined Mode), Sound Active Mode (16 Modes), RGBA Dimmer Mode, Static Color Mode (64 Colors), and DMX Controlled
- Control: Digital DMX Display with 4-button menu for easy navigation
- Connection: Data linkable via 3-pin XLR cables
- Daisy chain: IEC AC input and out put on the side of the fixture to Daisy chain the power cords (link up to 20 fixtures)
- Power consumption: 28W
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Rechargeable Lithium battery life: 4 hours full on (with a full charge); 5.5 Hours in Energy Saving Mode (with full charge, 4 hours charge time)
- Dimensions (LxWxH): 5.5"x 9"x10"/253x227x140mm
- Weight: 4 lbs./ 1.9 kg.

CODE: I226100329



Photometric

R	1201	300	126.2	67.5	43.5	(LUX)
G	1038	244	104.7	61.2	37.5	
B	1124	286	124.4	66.7	42.9	
A	607	176.8	71.4	36.5	23	
RGBA	2830	622	305	182.3	109.4	



MEGA QPLUS GO

Specifications


- Light Source: 5x4W LEDs
- Colors: RGB + UV
- Beam Angle: 40-degree
- Dimming: Electronic 0 - 100%
- Channel Modes: 8 DMX Channel Modes: 1, 2, 3, 4, 5, 6, 7 or 8 Channel Modes:
- 5 Operational Modes: Auto Run Mode (16 Color Change Mode, 16 Color Fade Modes, & 1 Combined Mode), Sound Active Mode (16 Modes), RGB + UV Dimmer Mode, Static Color Mode (64 Colors), and DMX Controlled
- Control: Digital DMX Display with 4-button menu for easy navigation
- Connection: Data linkable via 3-pin XLR cables
- Daisy chain: IEC AC input and out put on the side of the fixture to Daisy chain the power cords (link up to 20 fixtures)
- Power consumption: 28W
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Rechargeable Lithium battery life: 4 hours full on (with a full charge); 5.5 Hours in Energy Saving Mode (with full charge, 4 hours charge time)
- Dimensions (LxWxH): 5.5"x9"x10"/ 253x227x140mm
- Weight: 4 lbs./ 1.9 kg.

CODE: I226100328



Photometric

R	1316	403	2184.1	98.6	66.6	(LUX)
G	1234	345	151.1	85.5	54.4	
B	1265	392	165.9	91.8	60.2	
UV	298	87.4	39.5	22.2	15.4	
RGB+UV	3460	921	442	253	149.5	





NEW! I8P HEX IP

Specifications

- Light Source: 18x12W, 6-IN-1 HEX LEDs
- Colors: RGBAW + UV color mixing
- Beam Angle: 24-degree, 44 degree field angle
- Dimming: Electronic 0 - 100%
- Channel Modes: 4 DMX modes (6, 7, 8, & 12 channel)
- Operational Modes: 5 Operational Modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- Control: 4-Button DMX menu with digital display
- Connection: PowerCon True I & Seatronic 3-Pin DMX IP-connectors
- IP65 rated

CODE: I226100362



NEW! I2P HEX IP

Specifications

- Light Source: 12x12W, 6-IN-1 HEX LEDs
- Colors: RGBAW + UV color mixing
- Beam Angle: 24-degree, 44 degree field angle
- Dimming: Electronic 0 - 100%
- Channel Modes: 4 DMX modes (6, 7, 8, & 12 channel)
- Operational Modes: 5 Operational Modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- Control: 4-Button DMX menu with digital display
- Connection: PowerCon True I & Seatronic 3-Pin DMX IP-connectors
- IP65 rated

CODE: I226100361



NEW! 7P HEX IP

Specifications

- Light Source: 7x12W, 6-IN-1 HEX LEDs
- Colors: RGBAW + UV color mixing
- Beam Angle: 24-degree, 44 degree field angle
- Dimming: Electronic 0 - 100%
- Channel Modes: 4 DMX modes (6, 7, 8, & 12 channel)
- Operational Modes: 5 Operational Modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- Control: 4-Button DMX menu with digital display
- Connection: PowerCon True I & Seatronic 3-Pin DMX IP-connectors
- IP65 rated

CODE: I226100360



ELEMENT HEX IP/PEARL

Specifications

- Light Source: 4x10W LEDs
- Colors: RGBAW + UV
- Beam Angle: 20 degree
- LUX: 684 @ 2M; 171 @ 4M
- Dimming: Electronic 0 - 100%
- Channel Modes: 5 DMX Channel Modes: 6, 7, 8, 11, or 12
- Operational Modes: 5 Operational Modes: RGBAW+UV Dimmer Mode; Sound Active mode; Auto Run Mode (16 Color change modes, 16 Color fade modes, & 1 Color/fade combo mode); Static Color mode; and DMX Controlled
- Control: 4-button DMX menu display on rear panel with water resistant hatch
- Connection: DMX: WiFLY EXR Wireless DMX IEC connection to power/charge fixture
- Battery Type: fixed lithium battery
- Battery Charge Time: 4.5 Hours (With POWER switch On)
- Battery Life: 11 hours (single color)
- Power consumption: 45W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 5.51"x5.51"x7.55"/140x140x192mm
- Weight: 6.5 lbs. /2.9kg.

ELEMENT HEX IP CODE: 1226100340
 ELEMENT HEX IP PEARL CODE: 1226100347



RGBAW Color Mixing + UV: 



ELEMENT HEX

Specifications

- Light Source: 4x10W
- Colors: RGBAW + UV
- Beam Angle: 20 degree
- LUX: 684@ 2M; 171 @ 4M
- Dimming: Electronic 0 - 100%
- Channel Modes: 5 DMX Channel Modes: 6, 7, 8, 11, or 12
- Operational Modes: 5 Operational Modes: RGBAW+UV Dimmer Mode; Sound Active mode; Auto Run Mode (16 Color change modes, 16 Color fade modes, & 1 Color/fade combo mode); Static Color mode; and DMX Controlled
- Control: 4-button DMX menu display on rear panel
- Connection: DMX: WiFLY EXR Wireless DMX IEC connection to power/charge fixture
- Battery Type: fixed lithium battery
- Battery Charge Time: 4.5 Hours (With POWER switch On)
- Battery Life: 11 hours (single color)
- Power consumption: 45W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 5.51"x5.51"x7.55"/140x140x192mm
- Weight: 5 lbs. / 2,26kg.

CODE: 1226100339



RGBAW Color Mixing + UV: 



ELEMENT QAIP

Specifications

- Light Source: 6x5W
- Colors: RGBA
- Beam Angle: 20 degree
- LUX: 901 @ 2M; 213 @ 4M
- Dimming: Electronic 0 - 100%
- Channel Modes: 5 DMX Channel Modes: 4, 5, 6, 9 or 10
- Operational Modes: 5 Operational Modes: RGBA Dimmer Mode; Sound Active mode; Auto Run Mode (16 Color change modes, 16 Color fade modes, & 1 Color/fade combo mode); Static Color mode; and DMX Controlled
- Control: 4-button DMX menu display on rear panel with water resistant hatch
- Connection: DMX: WiFLY EXR Wireless DMX, IEC connection to power/charge fixture
- Battery Type: fixed lithium battery
- Battery Charge Time: 4.5 Hours (With POWER switch On)
- Battery Life: 11 hours (single color)
- Power consumption: 45W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 5.51"x5.51"x7.55"/140x140x192mm
- Weight: 6.5 lbs. /2.9kg.

CODE: I226100337



RGBA Color Mixing:



ELEMENT QA

Specifications

- Light Source: 6x5W
- Colors: RGBA
- Beam Angle: 20 degree
- LUX: 901 @ 2M; 213 @ 4M
- Dimming: Electronic 0 - 100%
- Channel Modes: 5 DMX Channel Modes: 4, 5, 6, 9 or 10
- Operational Modes: 5 Operational Modes: RGBA Dimmer Mode; Sound Active mode; Auto Run Mode (16 Color change modes, 16 Color fade modes, & 1 Color/fade combo mode); Static Color mode; and DMX Controlled
- Control: 4-button DMX menu display on rear panel with water resistant hatch
- Connection: DMX: WiFLY EXR Wireless DMX, IEC connection to power/charge fixture
- Battery Type: fixed lithium battery
- Battery Charge Time: 4.5 Hours (With POWER switch On)
- Battery Life: 11 hours (single color)
- Power consumption: 45W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 5.51"x5.51"x7.55"/140x140x192mm
- Weight: 5 lbs. / 2.26kg.

CODE: I226100338



RGBA Color Mixing:



NEW! MOD HEX100

Specifications

- Light Source: 7x15W
- Colors: RGBWA+UV
- Beam Angle: 17-degrees
- Total Lumens: <1800
- LUX: 2665 @ 3M (9.8 ft.)
- Power Input & Output: PowerCON
- DMX: 3-pin & 5-pin In/Out
- Dimming: Electronic 0 - 100%
- Channel Modes: Control Channels: 6, 8, 11 or 12
- Operational Modes: 6 Operational Modes
- Control: 4-button control menu with display
- Connection: DMX: 3-pin & 5-pin In/Out
- Power consumption: 118W
- Multi-Voltage Operation: 100-240V 50Hz/60Hz (Auto Sensing)
- Dimensions (LxWxH): 7"x8"x9.25"/174x204x235mm
- Weight: 6 lbs. / 2.6 kg.

CODE: 1226100349



RGBAW Color Mixing + UV:



MOD 100 KIT PEARL

White Housing Kit for MOD 100 Series LED PARs :

MOD HEX100
MOD QW100
MOD TW100

CODE: 1226100354



MOD BARN DOORS BLK/WHT

Black Barn Doors for MOD Series LED PARs/ White Barn Doors for Mod Kit Pearl

MOD BARN DOORS BLK CODE: 1226100355
MOD BARN DOORS WHT CODE: 1226100356



NEW! MOD QA60

Specifications

- Light Source: 4x15W
- Colors: RGBA
- Beam Angle: 17-degrees
- Total Lumens: <750
- LUX: 3026 @ 3M (9.8 ft.)
- Power Input & Output: PowerCON
- DMX: 3-pin & 5-pin In/Out
- Dimming: Electronic 0 - 100%
- Channel Modes: Control Channels: 4, 5, 6, 9 or 10
- Operational Modes: 6 Operational Modes
- Control: 4-button control menu with display
- Connection: DMX: 3-pin & 5-pin In/Out
- Power consumption: 74W
- Multi-Voltage Operation: 00-240V 50Hz/60Hz (Auto Sensing)
- Dimensions (LxWxH): 7"x8"x9.25"/174x204x235mm
- Weight: 6 lbs. / 2.6 kg

CODE: 1226100350



RGBA Color Mixing:



MOD 60 KIT PEARL

White Housing Kit for MOD 60 Series LED PARs :

MOD QA60

CODE: 1226100352



MOD BARN DOORS BLK/WHT

Black Barn Doors for MOD Series LED PARs/ White Barn Doors for Mod Kit Pearl

MOD BARN DOORS BLK CODE: 1226100355
MOD BARN DOORS WHT CODE: 1226100356



NEW!

MOD QW100

Specifications

- Light Source: 7x15W
- Colors: RGBW
- Beam Angle: 17-degrees
- Total Lumens: <2300
- LUX: 3887 @ 3M (9.8 ft.)
- Power Input & Output: PowerCON
- DMX: 3-pin & 5-pin In/Out
- Dimming: Electronic 0 - 100%
- Channel Modes: Control Channels: 4, 5, 6, 9 or 10
- Operational Modes: 6 Operational Modes
- Control: 4-button control menu with display
- Connection: DMX: 3-pin & 5-pin In/Out
- Power consumption: 74W
- Multi-Voltage Operation: 00-240V 50Hz/60Hz (Auto Sensing)
- Dimensions (LxWxH): 7"x8"x9.25"/174x204x235mm
- Weight: 6 lbs. /2.6 kg

CODE: I226100348



MOD 100 KIT PEARL

White Housing Kit for MOD 100 Series LED PARs :

- MOD HEX100
- MOD QW100
- MOD TW100

CODE: I226100354



MOD BARN DOORS BLK/WHT

Black Barn Doors for MOD Series LED PARs/ White Barn Doors for Mod Kit Pearl

- MOD BARN DOORS BLK CODE: I226100355
- MOD BARN DOORS WHT CODE: I226100356



NEW!

MOD TW100

Specifications

- Light Source: 7x15W
- Colors: Cool White, Warm White, Warm White & Amber
- Beam Angle: 17-degrees
- Total Lumens: <2400
- LUX: 2973 @ 3M (9.8 ft.)
- Power Input & Output: PowerCON
- DMX: 3-pin & 5-pin In/Out
- Dimming: Electronic 0 - 100%
- Channel Modes: Control Channels: 6, 8, 11 or 12
- Operational Modes: 6 Operational Modes
- Control: 4-button control menu with display
- Connection: DMX: 3-pin & 5-pin In/Out
- Power consumption: 111W
- Multi-Voltage Operation: 100-240V 50Hz/60Hz (Auto Sensing)
- Dimensions (LxWxH): 7"x8"x9.25"/174x204x235mm
- Weight: 6 lbs. / 2.6 kg

CODE: I226100351



MOD 100 KIT PEARL

White Housing Kit for MOD 100 Series LED PARs :

- MOD HEX100
- MOD QW100
- MOD TW100

CODE: I226100354



MOD BARN DOORS BLK/WHT

Black Barn Doors for MOD Series LED PARs/ White Barn Doors for Mod Kit Pearl

- MOD BARN DOORS BLK CODE: I226100355
- MOD BARN DOORS WHT CODE: I226100356



MEGA 64 PROFILE PLUS


Specifications

- Light Source: 12x4W Quad (RGB+UV 4-IN-1) LEDs
- Smooth RGB Color Mixing (fast or slow Color change operation) with no RGB+UV shadows
- DMX-512 protocol / 5 DMX Channel Modes: 4/5/6/9/10 channels
- 5 Operational Modes: RGB+UV Dimmer Mode, Sound Active Mode, Auto Run Mode (16 Color Change Programs, 16 Color Fade Programs, & Color Change & Fade Combination), Static Color Mode, & DMX Controlled
- 64 built-in Color Macros
- Beam Angle: 25 degrees / Power Draw: 54W Max
- IEC AC input and output on rear to Daisy chain power (Up to 12 Mega 64 Profile Plus fixture's)
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 10.5"x10.25"x4.5"/261x260x110mm
- Weight: 5 lbs./ 2.1 kg.

CODE: 1226100311

Photometric

	R	3940	1324	615	361	209	
	G	2860	1014	424	230	149.9	
	B	3160	1158	440	240	148	(LUX)
Beam Angle	UV	862	243	112	61.4	39	
25°	RGB+UV	11720	3520	1346	820	508	



RGB Color Mixing + UV:



Compatible with:
ADJ LED RC2
(Sold Separately)
1226200027

MEGA TRIPAR PROFILE PLUS


Specifications

- Light Source: 5x4W, 4-IN-1 Quad RGB+UV LEDs
- Smooth RGB Color mixing (fast or slow Color change operation)
- 5 DMX Channel Modes: 4, 5, 6, 9 or 10 Channel Modes:
- 5 Operational Modes: Auto Run Mode (16 Color Change Mode, 16 Color Fade Modes, & 1 Combined Mode), Sound Active Mode (16 Modes), RGB + UV Dimmer Mode, Static Color Mode (64 Colors), and DMX Controlled
- 64 built-in Color Macros
- Beam Angle: 40 degrees / Power Draw: 21W max
- IEC AC input and out put on the side of the fixture to Daisy chain the power cords (link up to 30 fixtures)
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 8.75"x8.75"x3.25"/ 225x220x85mm
- Weight: 2.7 lbs./ 1.23 kg.

CODE: 1226100298

Photometric

	R	D30	235	75	38	22	14	
	G	D30	518	173	59	34	15	
	B	D30	530	176	76	38	27	(LUX)
	UV	D30	77	21	7	5.5	3.5	
	RGB	D30	1298	318	156	84	56	
	RGB+UV	D30	1327	345	165	92	58	



RGB Color Mixing + UV:



Compatible with:
ADJ LED RC2
(Sold Separately)
1226200027

NEW! MEGA HEX PAR

Specifications

- Light Source: 5x6W, 6-IN-1 Hex LEDs
- Colors: RGBWA+UV
- Beam Angle: 25-degrees
- Dimming: Electronic 0 - 100%
- Channel Modes: 5 DMX Channel Modes: 6, 7, 8, 11 or 12 Channel Modes:
- Operational Modes: 5 Operational Modes: Auto Run Mode (16 Color Change Mode, 16 Color Fade Modes, & 1 Combined Mode), Sound Active Mode (16 Modes), RGBAW + UV Dimmer Mode, Static Color Mode (63 Colors), and DMX Controlled
- Connection: Linkable via 3-pin XLR cable
- Daisy chain: IEC AC input and out put on the side of the fixture to Daisy chain the power cords (link up to 30 fixtures) Power consumption: 30W Max
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Life Expectancy: 50,000hrs
- Dimensions (LxWxH): 10.25"x 10.25"x 4.25"/ 261x260x110mm
- Weight: 4 lbs./ 1.87 kg.

CODE: 1226100345



ADJ UC IR
Included
132100074



VPAR PAK

Specifications

- Ultra bright slim flat black Par with 5x 4-Watt, 4-IN-1 QUAD LEDs (RGBA) – casts no RGB shadows
- Smooth RGBA Color Mixing (fast or slow Color change operation)
- Unique "sit-flat" design: Power & DMX Ins/Outs intelligently designed so the unit can be set flat on the ground or set inside truss
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- 8 DMX Channel Modes: 1, 2, 3, 4, 5, 6, 7 or 8 channels
- 5 Operational Modes: RGBA Dimmer mode, sound active mode, static Color mode, auto run mode (3 auto run modes), and DMX Control
- Digital DMX Display with 4-button menu for easy navigation
- Stand Alone or Master/Slave Configuration
- Beam Angle: 40 degrees
- 15 built-in Color Macros
- DMX-512 protocol
- Color strobe effect
- Linkable via 3-pin XLR cable
- Electronic Dimming: 0-100%
- Flicker Free
- Includes a scissor yoke to hang on truss, mount on a wall or set on the ground
- Long Life LEDs (50,000 hrs.)



- Power Draw: 21W Max
- IEC AC input and out put on the side of the fixture to Daisy chain the power cords (link up to 30 fixtures)
- Compatible with ADJ LED RC2 wireless infrared remote control up to 30 ft./ 10M (included in the pak)
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 225 x 220 x 85mm
- Weight: 1.2 kg.
- VPAR Gig Bag inner dimensions (LxWxH): 225x200x240mm
- System Weight: 3 kg.

CODE: 1226100280

ULTRA HEX BAR 12


Specifications

- Light Source: 12x10W Ultra bright HEX (RGBAW + UV: 6-IN-1) Color mixing LEDs
- 5 DMX Channel Modes: 6, 7, 8, 12 or 36 channels
- 6 Operational Modes: Auto Run, Program Mode, Sound Active, RGBAW + UV Dimmer, Static Color and DMX-512 Mode
- Beam Angle: 40 degrees
- 63 built-in Color Macros
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Power Draw: 90W
- Linkable: DMX via 3-pin XLR cable; Power via IEC daisy-chain power link
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 1020x70x122mm/1060x63x90mm
- Weight: 4.74 kg.

CODE: I226200047

Photometric

R	D40	823	335	176	103.9	65.6	(LUX)
G	D40	968	338	183	104.8	64.7	
B	D40	874	328	168	95.8	60.8	
W	D40	1303	552	269	148	96.8	
A	D40	529	201	95.7	53.9	35.4	
UV	D40	192	80.2	39.2	22.4	14.8	
RGBAWUV	D40	3880	1680	810	478	286	



RGBAW Color Mixing + UV:



"Quick Align"
Magnetic
Ends

ULTRA HEX BAR 6


Specifications

- Light Source: 6x10W Ultra bright HEX (RGBAW + UV: 6-IN-1) Color mixing LEDs
- 5 DMX Channel Modes: 6, 7, 8, 12 or 18 channels
- 6 Operational Modes: Auto Run, Program Mode, Sound Active, RGBAW + UV Dimmer, Static Color and DMX-512 Mode
- Beam Angle: 40 degrees
- 63 built-in Color Macros
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Power Draw: 55W
- Linkable: DMX via 3-pin XLR cable; Power via IEC daisy-chain power link
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 23"x4.5"x6.5"/585x110x165mm
- Weight: 6 lbs./ 2.82 kg.

CODE: I226200044

Photometric

R	D40	794	248	91.3	55.5	34.8	(LUX)
G	D40	868	282	110.7	62.7	39.6	
B	D40	827	259	91.5	56	35.4	
W	D40	1185	396	174.7	87.3	63.3	
A	D40	466	143.2	63.8	37.3	24.3	
UV	D40	147.6	48.8	21.6	12.4	8	
RGBAWUV	D40	3710	1172	566	310	188.4	



RGBAW Color Mixing + UV:




"Quick Align"
Magnetic
Ends

UB 12H

Specifications

- Light Source: 12x6W Ultra bright (6-IN-1) LEDs
- Colors: Variable RGBWA+UV Color mixing
- Color Macros: 35 built in
- Channel Modes: 6 DMX Channel Modes: 3, 5, 6, 7, 8 or 20 channels
- Operational Modes: 5 Operational Modes: Auto (Program Run), Sound Active, RGBWA+UV Dimmer, Static Color and DMX-512 Mode
- Beam Angle: 40 degrees
- Flicker Free Operation: @2200Hz
- Control: 4-Button DMX LED Display
- Connection: DMX via 3-pin XLR cable
- Daisy chain: Power via IEC daisy-chain power link (Up to 13 UB 12H)
- Electronic Dimming: 0-100%
- Life Expectancy: 50,000 hrs
- Power consumption: 87W
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 41.75"x2.5"x3.75"/1060x63x90mm
- Weight: 6 lbs./ 2.7 kg.

CODE: 1226200056

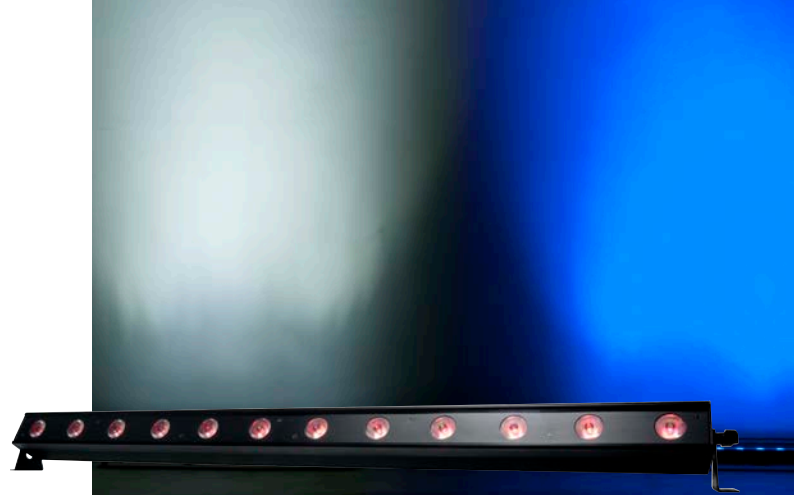

RGBAW Color Mixing + UV:




"Quick Align"
Magnetic
Ends

UB 9H

Specifications

- Light Source: 9x6W Ultra bright (6-IN-1) LEDs
- Colors: Variable RGBWA+UV Color mixing
- Color Macros: 35 built in
- Channel Modes: 6 DMX Channel Modes: 3, 5, 6, 7, 8 or 11 channels
- Operational Modes: 5 Operational Modes: Auto (Program Run), Sound Active, RGBWA+UV Dimmer, Static Color and DMX-512 Mode
- Beam Angle: 40 degrees
- Flicker Free Operation: @2200Hz
- Control: 4-Button DMX LED Display
- Connection: DMX via 3-pin XLR cable
- Daisy chain: Power via IEC daisy-chain power link (Up to 15 UB 9H)
- Electronic Dimming: 0-100%
- Life Expectancy: 50,000 hrs
- Power consumption: 61W
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 41.75"x2.5"x3.5"/1060x63x90mm
- Weight: 6 lbs./ 2.6 kg.

CODE: 1226200055

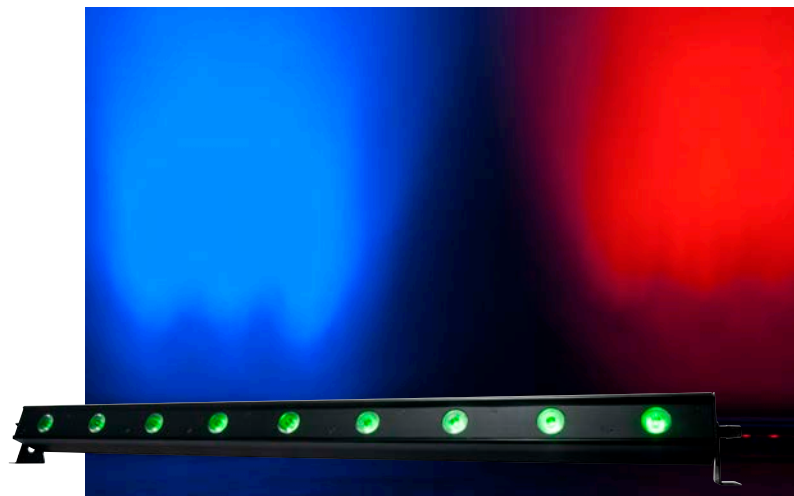

RGBAW Color Mixing + UV:




"Quick Align"
Magnetic
Ends

UB 6H

Specifications

- Light Source: 6x6W Ultra bright (6-IN-1) LEDs
- Colors: Variable RGBWA+UV Color mixing
- Color Macros: 35 built in
- Channel Modes: 6 DMX Channel Modes: 3, 5, 6, 7, 8 or 11 channels
- Operational Modes: 5 Operational Modes: Auto (Program Run), Sound Active, RGBWA+UV Dimmer, Static Color and DMX-512 Mode
- Beam Angle: 40 degrees
- Flicker Free Operation: @2200Hz
- Control: 4-Button DMX LED Display
- Connection: DMX via 3-pin XLR cable
- Daisy chain: Power via IEC daisy-chain power link (Up to 25 UB 6H)
- Electronic Dimming: 0-100%
- Life Expectancy: 50,000 hrs
- Power consumption: 38W
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 22.5"x2.5"x3.75"/560x63x90mm
- Weight: 4 lbs./ 1.6 kg.

CODE: 1226200054

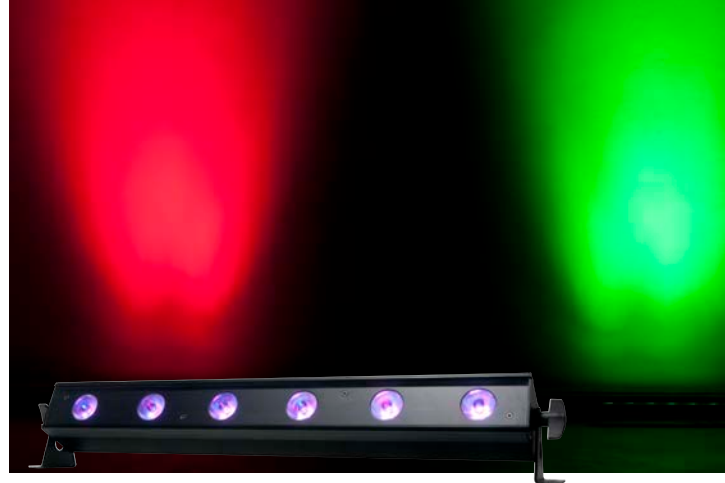

RGBAW Color Mixing + UV:



"Quick Align"
Magnetic
Ends

VBAR PAK

Specifications

- Ultra bright, compact black Linear fixture with 5x 4-Watt, 4-IN-1 QUAD LEDs (RGBA) casts no RGB shadows
- Smooth RGBA Color Mixing (fast or slow Color change operation)
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- 8 DMX Channel Modes: 1, 2, 3, 4, 5, 6, 7 or 8 channels
- 5 Operational Modes: RGBA Dimmer mode, sound active mode, static Color mode, auto run mode (3 auto run modes), and DMX Control
- Digital DMX Display with 4-button menu for easy navigation
- Stand Alone or Master/Slave Configuration
- Beam Angle: 40 degrees
- 15 built-in Color Macros
- DMX-512 protocol
- Color strobe effect
- Linkable via 3-pin XLR cable
- Electronic Dimming: 0-100%
- Flicker Free
- Adjustable mounting brackets; mount on a wall or set on the ground
- Long Life LEDs (50,000 hrs.)
- Power Draw: 21W Max
- IEC AC input and out put on the side of the fixture to Daisy chain the power cords (link up to 30 fixtures)
- Compatible with ADJ LED RC2 wireless infrared remote control up to 30 ft./ 10M (included in the pak)



- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 560 x 63 x 90mm
- Weight: 1.7 kg.
- VBAR Gig Bag inner dimensions (LxWxH): 560x165x90mm
- System Weight: 4 kg.

CODE: 1226100281

MEGA TRI BAR


Specifications

- Light Source: 18x3W LEDs
- Operational Modes: 4 Operational Modes (DMX-512, Master/Slave, Stand Alone and Sound Active)
- Channel Modes: 7 DMX work modes (2, 3, 4, 6, 7, 12 & 54 Channel Modes)
- Electronic Dimming: 0 - 100%
- Connection: Linkable via 3-pin XLR input & output
- Control: On-board, 4-button LED DMX display/menu
- Beam angle: 40 degrees
- Power Draw: 102W
- Multi-Voltage Operation: 90-240V AC, 50/60Hz
- Dimensions (LxVxH): 43.3"x3.14"x4.56"/1100x80x116mm
- Weight: 13.2lbs./ 6kgs.

CODE: 1226200017



RGB Color Mixing:

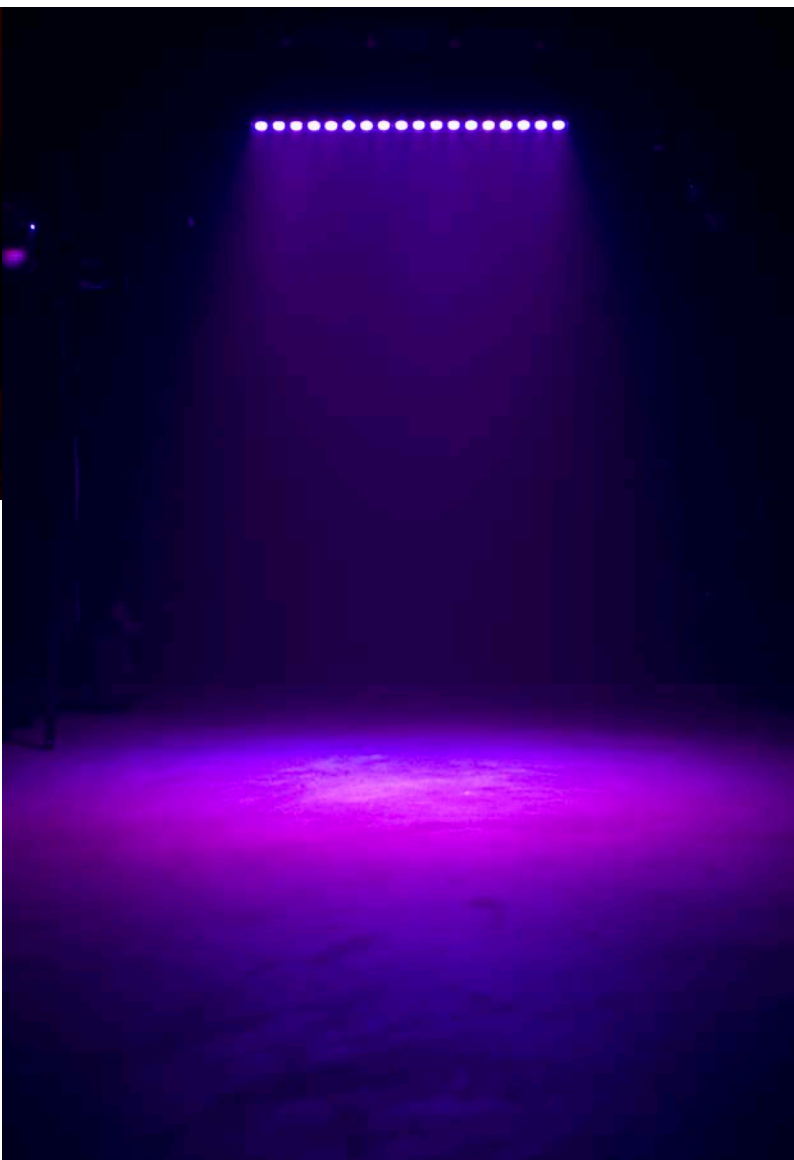



LED EFFECTS

LED COLOR TUBE II

Specifications

- 40-inch/1000mm LED Color Tube with UV-resistant polycarbonate tubing
- 32 Bright RGB TRI LEDs (3-in-1)
- 15 Exciting LED Colors plus White
- Rainbow Color effect
- Each unit includes one easy-to-use wireless remote to control: Manual Color Change; Auto Color Change; Flash; Rainbow Effect; Slow to Fast Color Strobing; On/Off
- Includes AC power supply, two wall mounting brackets and base to stand LED Color Tube up vertically
- Long life LEDs (Rated at approximately 30,000 hrs.)
- Light Source: 32 x 0.2W TRI RGB's LEDs
- Power Draw: 6W total (All LED's @ Full On)
- Auto sensing power supply: DC 100V/60Hz - 240V/50Hz
- Dimensions (LxWxH): 40"x2"x2"/1016x50x50mm
- Weight: 2 lbs./1 kgs.



RGB Color Mixing:



CODE: I211500011




COLOR STRAND LED

Specifications

- 20 replaceable bulbs included on a 30 ft strand.
- Each bulb is 3W RGB + 3W Warm White
- Long life LEDs (50,000 hr. rating)
- RGB Color mixing + Warm White (separate control)
- Brightness Control
- RF Remote included (Remote range up to 30m)
- 9 Built-in programs
- IP Rating: IP44
- Power input: AC 100-240V 50/60HZ
- Power consumption: 6W (Each Bulb) 120W (Complete Strand)
- Power Cord Daisy chained: 5 Strands Max. (120V) 10 Strands Max. (240V)
- Dimensions (LxWxH): 15M (Whole Strand) / 2.25"x4"/57x100mm (Individual Bulb)
- Weight: 7.7lbs./ 3.5kg (Whole Strand)




Color Strand
RGBW
RF Remote
I226100336

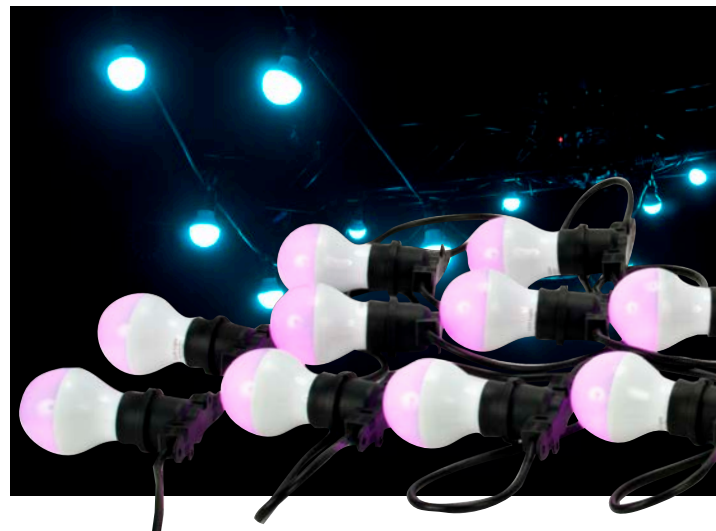

CODE: I226100334

RGB Color Mixing:

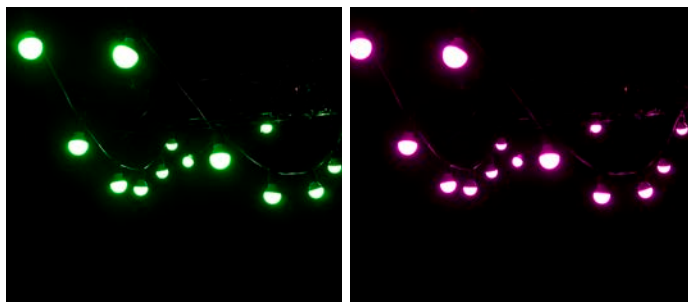

LED RGBW E27 BULB

Specifications

- Replacement LED Bulb for Color Strand LED
- 3x1W R/G/B
- 1x3W WW LEDs
- Wireless control via built-in 2.4GHz receiver
- Multi-Voltage Operation 100-240V 50/60Hz
- Long LED life
- Dimensions (LxWxH): 2.25"x4"/57x100mm (Individual Bulb)

CODE: I226100335


PROFILE PANEL RGBA

Specifications

- Light Source: 288x10mm LEDs
- Colors: LEDs (72 Red, 72 Green, 72 Blue, & 72 Amber LEDs)
- Beam Angle: 30 degrees
- Operational Modes: 6 Operational Modes: Built-in programs, Sound mode, Static Color mode, Auto Run, RGBA Dimmer mode, & DMX mode
- Connection: Linkable via 3-pin XLR cable
- Daisy chain: Power Cord Daisy chain up to 20 fixtures Max @ 120V
- Control: 4-button LED display on rear panel
- Power consumption: 33W
- Multi-Voltage Operation: 100-240V, 50/60Hz PowerCON In/Out
- Life Expectancy: Rated at 100,000 hrs.
- Dimensions (LxwxH): 16.75"x3.2"x9.75"/425x81.5x247mm
- Weight: 8 lbs. / 3.5 kgs.

CODE: I226100344

RGBA Color Mixing:

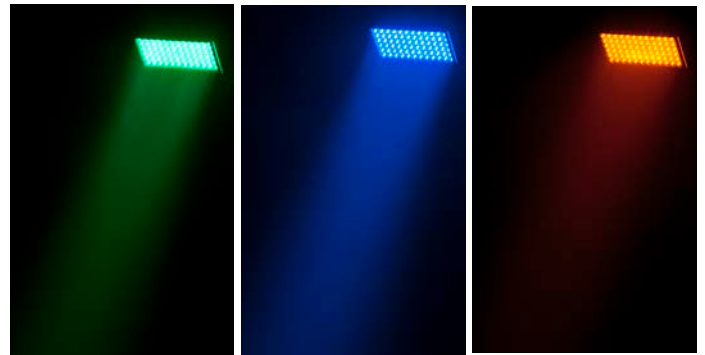

BOOM BOX FX3

Specifications

- Light Source: 2x10W RGBW LED's + 9x3W RGB TRI LED's + 88 x 0.2W RGB SMD TRI LED's
- Visual Effects: Effect (9 x 3W RGB TRI LED's) and an LED Visual Ring Effect (88 x 0.2W RGB SMD TRI)
- Channel Modes: 2 DMX Channel Modes:
- Operational Modes: 3 Operation modes: Sound Active, Show Mode or DMX Controllable
- Shows: 9 Exciting built-in shows
- Connection: Linkable via 3-pin XLR cable
- Control: 4-button DMX display on rear panel
- Daisy chain: IEC AC IN/OUT on rear to Daisy chain power (8 Fixtures Max. @ 120V and 16 Fixtures Max. @230V)
- Power consumption: 60W
- Multi-Voltage Operation: 100V-240V, 50/60Hz
- Life Expectancy: Rated at approximately 50,000 hours
- Dimensions (LxVxH): 25"x9.13"x12.32"/634x232x313mm
- Weight: 14 lbs. / 6.3kg.

CODE: I237000171

RGBW Color Mixing:



BOOM BOX FX2

Specifications

- Light Source: Gobos: 8x3W LEDs (2 Red, 2 Green, 2 Blue, & 2 White); Derby Effect: 2 x 10W Quad LEDs (RGBW); Wash: 8 x 1W LEDs (2 Red, 2 Green, 2 Blue & 2 Amber) + Red & Green Laser
- Channel Modes: 2 DMX Channel Modes: 3 Channels & 18 DMX Channels
- Operational Modes: 3 Operation modes: Sound Active, Show Mode or DMX Controllable
- Gobos: 8 Gobos
- Shows: 9 Exciting built-in shows
- Connection: Linkable via 3-pin XLR cable
- Control: 4-button DMX display on rear panel
- Power consumption: 62W
- Multi-Voltage Operation: 100V-240V, 50/60Hz
- Life Expectancy: Rated at approximately 50,000 hours
- Dimensions (LxWxH): 9"x25"x12.5"/232x634x319mm
- Weight: 15.5 lbs. / 7kg.

CODE: I237000169

RGBW Color Mixing:



BOOM BOX FXI

Specifications

- Light Source: Dome: 6x3W LEDs (1 Red, 1 Green, 1 Blue, 1 White, 1 Amber, & 1 UV); Wash: 8 x 1W LEDs (2 Red, 2 Green, 2 Blue, & 2 Amber); Derby Effect: 2 x 10W Quad LEDs (RGBW) + Red & Green Laser
- Channel Modes: 2 DMX Channel Modes: 3 Channels & 22 DMX Channels
- Operational Modes: 3 Operation modes: Sound Active, Show Mode or DMX Controllable
- Shows: 9 Exciting built-in shows
- Colors: Produces 63 Preset Color Combinations
- Connection: Linkable via 3-pin XLR cable
- Control: 4-button DMX display on rear panel
- Daisy chain: IEC AC IN/OUT on rear to Daisy chain power (8 Fixtures Max. @ 120V and 16 Fixtures Max. @230V)
- Power consumption: 66W
- Multi Voltage: 100V-240V, 50/60Hz
- Life Expectancy: Rated at approximately 50,000 hours
- Dimensions (L xWxH): 9.5"x25"x12.5"/239x634x319mm
- Weight: 14.2 lbs. / 6.5kg.

CODE: I237000168

RGBW Color Mixing:



STINGER GOBO

Specifications

- Light Source: High Output 3 FX in 1: Gobo Effect, Strobe/Chase and Laser effect with 8x3W RGBW LED's + 8x1W RGBA LED's + Red & Green Lasers
- Laser: 4.9mW Red & Green Laser Diodes
- Channel Modes: 2 DMX Channel Modes: 2 and 14 DMX Channels
- Operational Modes: 3 Operation modes: Sound Active, Show Mode or DMX Controllable
- Gobos: 8 Gobos
- Shows: 6 Exciting built-in shows
- Connection: Linkable via 3-pin XLR cable
- Control: 4-button DMX display on rear panel
- Daisy chain: IEC AC IN/OUT on rear to Daisy chain power (8 Fixtures Max. @ 120V and 16 Fixtures Max. @230V)
- Power consumption: 55W
- Multi Voltage Operation: 100V-240V, 50/60Hz
- Dimensions (LxWxH): 16.25"x 6"x8.25"/410mmx151mmx210mm
- Weight: 11 lbs./5 kgs.



Startec
SERIES
by ADJ

CODE: 1237000150

RGBW Color Mixing:



STINGER STAR

Specifications

- Light Source: 6x3W RGBWAV + 8x1W RGBA LED's + Red & Green Laser
- Laser: 4.9mW Red & Green Laser Diodes
- Channel Modes: 2 DMX Channel Modes: 2 and 14 DMX Channels
- Operational Modes: 3 Operation modes: Sound Active, Show Mode or DMX Controllable
- Shows: 6 Exciting built-in shows
- Connection: Linkable via 3-pin XLR cable
- Control: 4-button DMX display on rear panel
- Daisy chain: IEC AC IN/OUT on rear to Daisy chain power (8 Fixtures Max. @ 120V and 16 Fixtures Max. @230V)
- Power consumption: 55W
- Multi-Voltage Operation: 100V-240V, 50/60Hz
- Life Expectancy: Rated at approximately 50,000 hours
- UC IR Remote Control (Sold Separately) & Compatible
- Light Source: 6 x 3W RGBWAV + 8 x 1W RGBA LED's + Red & Green Laser
- Dimensions (LxWxH): 16.25"x8.25"x9.5"/410x210x238mm
- Weight: 10 lbs./4.4 kgs.



Startec
SERIES
by ADJ

CODE: 1237000149

RGBWAV Color Mixing:



STINGER II

Specifications

- Light Source: 6x5W RGBA + White & Pink LED's + 8x3W UV LED's + Red & Green Laser
- Channel Modes: 2 DMX Channel Modes: 2 Channels & 9 Channels
- Operation: 3 Operation modes: Sound Active, Master/Slave or DMX Controllable
- Programmes: Exciting built-in programs (Sound Active & Master/Slave modes)
- Colors: Produces 15 Preset Colors
- Connection: Linkable via 3-pin XLR cable
- Control: 4-button DMX display on rear panel
- Electronic Dimming: 0 - 100%
- Daisy chain: IEC AC IN/OUT on rear to Daisy chain power (Connect up to 10 Fixtures)
- Power consumption: 70W
- Multi-Voltage Operation: 100V-240V, 50/60Hz
- Life Expectancy: Rated at approximately 50,000 hours
- Dimensions (LxWxH): 12"x9"x12.25" / 304x230.5x313mm
- Weight: 11 lbs./5kg.

CODE: I237000133



UC-IR
(Sold Separately)
I321000074



Startec
SERIES
by ADJ



STINGER

Specifications

- Light Source: 6x5W RGBWAP (Red, Green, Blue, White, Amber & Pink) LEDs + 8x3W White LED's + Red & Green Laser
- Channel Modes: 10 DMX Channels
- Operational Modes: 3 Operation modes: Sound Active, Master/Slave or DMX Controllable
- Programmes: Exciting built-in programs (Sound Active & Master/Slave modes)
- Colors: Produces 15 Preset Colors
- Connection: Linkable via 3-pin XLR cable
- Control: 4-button DMX display on rear panel
- Electronic Dimming: 0 - 100%
- Daisy chain: IEC AC IN/OUT on rear to Daisy chain power
- Power Draw: 70W
- Multi-Voltage Operation: 100V-240V, 50/60Hz
- Life Expectancy: Rated at approximately 50,000 hours
- Dimensions (LxWxH): 12"x9"x9.75"/304mmx230.5mmx9.75mm
- Weight: 11 lbs./5kg.

CODE: I237000113



Startec
SERIES
by ADJ



STARBURST

Specifications

- Light Source: 5x15W RGBWYP (red, green, blue, white, yellow and purple) HEX-LEDs
- Connection: 3 Pin In/Out
- Operational Modes: 3 Operational Modes: Auto Run, Sound Active, DMX control, Auto sound active mode; Color, rotation, speed control via DMX
- Power consumption : 55W
- Dimensions (LxWxH): 12.5"x12.5"x16.25"/318x318x412.5mm
- Weight: 8 lbs. / 3,65 kg

CODE: I211500012



Startec
SERIES
by ADJ



REVO 4 IR

Specifications

- Light Source: 256 total 5mm LEDs : 64 Red, 64 Green, 64 blue and 64 White
- Channel Modes: 2 DMX Channel Modes: (4 Channel mode or 256 Channel mode)
- Beam Angle: 35 degrees
- Operational Modes: 3 operation modes: DMX, Sound Active & Master/Slave
- Connection/Daisy chain: IEC AC IN/OUT on rear to Daisy chain power (up to 12 fixture's @ 120V and 21 fixture's @ 230V)
- Power consumption: 34W maximum
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 12.25"x12"x13.25"/312x306x334 mm
- Weight: 11 lbs. / 4.9 kgs

CODE: I222400089



UC-IR
(Sold Separately)
I321000074



MINI DEKKER



Specifications

- Light Source: 2 bright 10-watt RGBW Quad LED's
- Operational Modes: Color Change, Color Fade, Color Change w/ Strobe, Color Fade w/ Strobe, Sound Active, Static Color, & DMX Control
- DMX Channels: 8 Channel ; 3 Pin In/Out
- Features: Sound Active, Strobe Effect, Multi Color Beams
- Power consumption: 25W maximum
- Multi-Voltage Operation: AC 100V-240V 47/63Hz
- Daisy chain: In/Out IEC power connections to daisy-chain power
- Dimensions (LxWxH): 7.75"x7.5"x9.75" / 197x184x245mm
- Weight: 3.74 lbs. / 1.7kg

CODE: 1222400087



Startec
SERIES
by ADJ

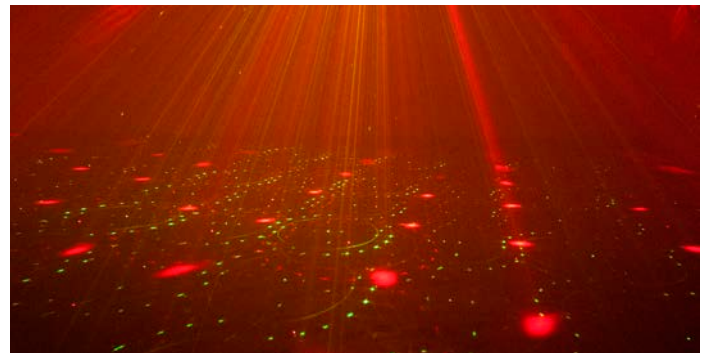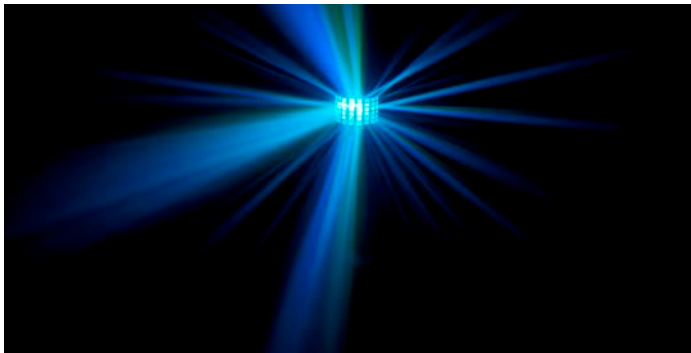

MINI DEKKER LZR


Specifications

- Channel Modes: 2 DMX Channel Modes: 2 Channel and 7 Channel
- Features: 2 bright 10-watt RGBW Quad LED's, Green Laser: 30mW (532nm) Green laser, Red Laser: 100mW (650nm) Red laser
- Operational Modes: 3 Operating Modes: Show Mode, Sound Active, & DMX Control
- Shows: 3 Show Modes with adjustable speed control
- Control: 4-button DMX LED menu
- Power consumption: 33W
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 8"x7.75"x8.5"/205x198x218mm (with Bracket) 8"x7.75"x 5.75"/205x198x147mm (without Bracket)
- Weight (per unit): 4 lbs./1.7kg.

CODE: 1222400090



Startec
SERIES
by ADJ



QUAD PHASE HP

Specifications

- Light Source: 1x32W High Powered RGBW (Red, Green, Blue, White) Quad LED
- Features: High output moonflower effect with dozens of razor sharp beams of light
- Channels: 4 DMX Channels (Color, Rotation, Strobe, Dimmer); 3 Pin DMX IN/Out
- Beam Angle: 65 degree
- Connection/Daisy chain: IEC AC In/Out (Power Daisy chain 5 units @110V, 9 units @220V)
- Power consumption: 64W
- Dimensions (LxWxH): 12.5"x8.0"x11.0"/312x198x279mm
- Weight: 9 lbs/4.0 kg

CODE: 1226100253



ADJ UC IR
Included
132100074

Compatible with
UC3 Series
UC3 Universal
Controller
1321000046



VERTIGO HEX LED

Specifications

- Light Source: 2x12W HEX RGBCAW (Red, Green, Blue, Cyan, Amber, White) LEDs
- Features: Classic ADJ effect now with six Color LED light source for additional Color output, 60 Sound activated beams move to the sound of the music
- Life Expectancy: Rated at approximately 50,000 hours
- Connection/Daisy chain: IEC AC In/Out (Power Daisy chain 10 units @110V, 15 units @220V)
- Power consumption: 30W
- Dimensions (LXWXH): 13.75"x10.75"x11.75"/345x272x294mm
- Weight: 7.0 lbs/2.75 kg

CODE: 1222300015



MINI TRI BALL II

Specifications

- Light Source: 2x3W RGB (Red, Green, Blue) Tri LED
- Features: Mini Rotating Ball produces 56 sound activated multi Colored beams of light, 3 Position FX control (Constant Rotation, No Rotation, Sound Active Rotation)
- Beam Angle: 180° Beam Angle; Long life LED (100,000 Hr. rating)
- Ball rotation: 15 RPM
- Max Power Draw: 13W
- Dimensions (LXWXH): 7.75"x7.75"x11.75"/195x195x295mm
- Weight: 3 lbs/ 0.96 kg

CODE: 1212300018



REVO SWEEP

Specifications

- Light Source: 84x5mm LEDs 21 Red, 21 Green, 21 Blue & 21 White LEDs)
 - Operational Modes: 3 Operational Modes: DMX-512; Master/ Slave: Sound Active
 - Channel Modes: 2 DMX Modes: 3 Channel Mode; 28 Channel mode for programming flexibility
 - Beam Angle: 116 degrees
 - Power consumption: 9W (120V) / 13W (230V)
 - Dimensions (LxWxH): 250x317x182mm
 - Weight: 2.0 kg
- CODE: 1222400031

Compatible with
UC3 Series
UC3 Universal
Controller
1321000046



RELEX PULSE LED

Specifications

- LED dual mirrored Moonflower with sharp Red, Green & Blue high output colored beams + LED Strobe in one light
- Number of LEDs: 32 Red, 30 Green, 30 Blue, 45 White (strobe)
- On/Off Switch to control strobe
- Produces LED patterns that can be projected on a dance floor or wall
- Wide beam spread covers a large area
- Sound active from built-in programs
- Rich, saturated beams that won't fade
- Includes hanging bracket
- Razor sharp beams
- Beam angle: 28-degrees (Strobe: 23-degrees)
- Power consumption: 27W max
- Extreme long lifetime of the LEDs (100,000 hr. rating)
- Switchable voltage on rear panel 115V or 230V (IEC plug)
- Dimensions (LxWxH): 363x322x111mm
- Weight: 5.5 kg

CODE: 1222300011



MICRO GOBO II

Specifications

- Projects 8 different gobo patterns with more than 200 green and red laser beams that rotate back and forth
- Light Source: Green Laser: 30mW (532nm) Green laser, Red Laser: 80mW (650nm) Red laser
- Includes a laser safety key on rear
- 3 Operational Modes: Fast Auto Show, Slow Auto Show or Sound Active Mode
- Includes UC Laser IR
- Power consumption: 9W max
- Includes UL Listed multi-voltage power supply: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 5"x6.75"x5"/130x172x130mm
- Weight: 2 lbs./0.6 kg.

CODE: I237000127



Includes ADJ UC Laser IR infrared wireless remote control.

MICRO 3D II

Specifications

- Produces a 3D Laser effect with more than 200 green and red laser beams that rotate back and forth
- Light Source: Green Laser: 30mW (532nm) Green laser, Red Laser: 80mW (650nm) Red laser
- Includes a laser safety key on rear
- 2 Operational Modes: Auto Mode (built-in programs), or Sound Active Mode
- Includes UC Laser IR Remote Control & (Transmitter Included)
- Power consumption: 9W max
- Includes UL Listed multi-voltage power supply: DC 12V
- Dimensions (LxWxH): 5.25"x6.75"x5.25"/130x172x130mm
- Weight: 2 lbs./.6 kg.

CODE: I223200043



Includes ADJ UC Laser IR infrared wireless remote control.

MICRO GALAXIAN II

Specifications

- Produces more than 200 green and red laser beams
- Light Source: Red Laser: 80mW (650nm) Red laser, Green Laser: 30mW (532nm) Green laser
- Includes a laser key on rear
- 2 Operational Modes: Auto Mode (built-in programs), or Sound Active Mode
- UC Laser IR Included
- Power consumption: 9W max
- Includes UL Listed multi-voltage power supply: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 5"x6.75"x5"/130x172x130mm
- Weight: 2 lbs./.6 kg

CODE: I223200041



Includes ADJ UC Laser IR infrared wireless remote control.

LASER EMERGENCY SWITCH


Specifications

The use of lasers of class 3B is permitted only by trained personnel in various countries.

Furthermore, in several countries, an additional emergency switch is mandatory. This emergency switch is inserted between the electrical wall outlet and the laser power supply to be able to switch off the laser in case of malfunction.

CODE: I237000126



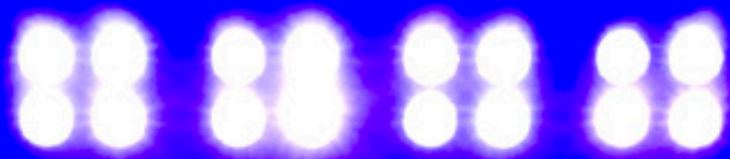

**UV & STROBE
EFFECTS**

NEW!

UV 72IP

Specifications

- 24x 3W UV LEDs
- LUX: 235 @ 2M; 57.7 @4M
- Beam Angles: 33-degrees
- PWM frequency: 1000 Hz
- 3-pin DMX IP rated In/Out connections
- Seatronic water proof PowerCON connectors to Daisy chain power
- 3 DMX Channels: 1/2/3 Channels
- Remote Control: WiFLY EXR DMX, UC-IR & Airstream IR Compatible
- 3 Operational Modes: UV Dimmer Mode; Fade Mode; and DMX Controlled
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Power Draw: 87W, 0.9Amps @ 120V/60Hz; 84W, 0.5Amps @220V/50Hz
- Dimensions (LxWxH): 8.25"x11.50"x8.50"/208.5x292x215mm
- Weight: 12 lbs. / 5.5 kg.

CODE: I226100341



UV COB CANNON

Specifications

- Light Source: 100W COB (Chip On Board) UV LED engine
- Operational Modes: 3 Operation modes: Sound Active, Manual, & DMX
- Channel Modes: 3 DMX Channel Modes: 1, 2 or 3 channel
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Beam angle: 33 degrees
- DMX Linkable: 3-pin XLR data connectors
- Power Linkable: Power-Con connectors
- (Up to 3 UV COB Cannon's @ 120V, 5 UV COB Cannon's @ 220V fixtures)
- Power Draw: 120W total (All LED's @ Full)
- Multi-Voltage Operation: Auto switching, AC 100V - 240V/50Hz -60Hz
- Dimensions (LxWxH): 12.75"x11"x8"/320x278x200mm
- Weight: 11 lbs. / 4.98kgs

CODE: I224100006



UC-IR
(Sold Separately)
1321000074

FLASH ROPE

Specifications

- User Friendly "plug and play" strobe lighting with 12 flash capsules
- Built-in "O" ring for easy hanging
- Flash Rate: 1 flash per second
- Lamp Life: 2,000 hours (average)
- Power consumption: 45W
- Length: 15.5 feet / 4760mm
- Weight: 1.75 lbs. / 0.8 kgs.

CODE: I215200013



UV FLOOD 36

Specifications

- Light Source: 12x3W UV LEDs (Rated at approximately 50,000 hours)
- Operational Modes: Sound Active, Dimmer Mode, and DMX Controlled
- Beam Angle: 57-Degrees
- 3 DMX Modes: 1/2/3
- DMX Connections: 3-Pin DMX In / Out DMX Connections
- Dimming: Electronic Dimming 0-100%
- Strobe Effect
- Strobe Rate: Adjustable
- Optional Accessory: Compatible with the Dotz Par RF wireless remote (sold separately)
- Power consumption: 35W (Full on)
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 11.75"x9.25"x4.5"/300x235x115mm
- Weight: 5lbs/2.2 kgs

CODE: 1226200049



Compatible with:
ADJ DOTZ PAR RF
(Sold Separately)
1223200035

UV LED BAR20 IR

Specifications

- Bright, high output Ultraviolet Bar with 20x1W UV LEDs
- Includes wireless remote control (control On/Off and strobe speed)
- Long Life LEDs (50,000 hrs.)
- 4 Operational Modes: Sound Active, DMX-512, Master/Slave or Manual
- 1 DMX Mode
- UV strobe effect
- Electronic Dimming: 0 - 100%
- Flicker Free
- Beam angle: 10 degrees vertical x 40 degrees horizontal linear beam angle - great for wall washing
- Linkable via 3-pin XLR cable and PowerCON In/Out
- 3-button LED DMX display on rear panel
- Dual bracket system allows fixture to be hung or set on the ground
- Power Draw: 30W
- Wavelength: 390-410 nanometers
- Multi-Voltage Operation: AC 100-240V, 47/63Hz
- Dimensions (LxVxH): 334x61x175mm
- Weight: 2.45 kg

CODE: 1224100008



UC-IR
(Sold Separately)
1321000074

STROBE SP-1500 DMX MKII

Specifications

- Powerful 1,500 W Xenon discharge strobe lamp
- Controllable via DMX 512 using 2 channels
- 0 - 100 % dimming via DMX or manual dimming knob on unit
- Speed adjustable from 0 - 15 flashes per sec.
- 6 built-in programs when using 4 strobes
- Master/Slave function with up to 4 strobes
- Can be controlled via UC-3 remote controller (optional)
- Power supply: 230 V / 50 Hz
- Power draw: 1,600 W max.
- Lamp: XOP-1500, (1,500 W)
- Dimensions (LXWXH): 452x147.5x116 mm
- Weight: 3.2kgs

CODE: 1215200016



ECO UV BAR DMX

Specifications

- Light Source: 18 x 3W High Output Ultra Violet LED
- Black light effect in a linear fixture with DMX control
- 3 DMX Channels ; 3 Pin DMX IN/Out
- 120° beam angle; Built in programs, Strobe, Pulse effect
- IEC AC In/Out (Power Daisy chain 10 units @110V, 15 units @220V)
- Power consumption: .47 Amps @ 110V; .24 Amps @ 220V
- Dimensions (LxWxH): 39.5"x2.5"x4.75"/1000x60x115mm
- Weight: 5 lbs/ 2.3 kg

CODE: 1224100005



ECO UV BAR 50 IR

Specifications

- Bright, high output ultraviolet bar with 9x 3-Watt UV LEDs
- Great for performance stages, theatrical productions and special effects installations
- On/Off switch on rear panel
- Beam Angle: 120-degree
- LED Strobe effect
- Adjustable mounting brackets for wall/ceiling mount or to set on the floor for wall washing
- Includes UC-IR Remote (Control: On/Off and Strobe Speed)
- Long Life LEDs (Rated at approximately 50,000 hrs.)
- Power Draw: 30W
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Light Source: 9x 3-Watt UV LEDs
- Wavelength: 390-410nm
- Dimensions (LxWxH): 19.75"x2.5"x4.5"/500x60x115mm
- Weight: 3.2 lbs. / 1.44 kgs

CODE: 1214100003



ECO UV BAR PLUS IR

Specifications

- Bright, high output ultraviolet bar with 18x 3-Watt UV LEDs
- Great for performance stages, theatrical productions and special effects installations
- On/Off switch on rear panel
- Beam Angle: 120-degree
- LED Strobe effect
- Includes mounting brackets for wall/ceiling mount or to set on the floor for wall washing
- Includes UC IR Remote (Rev. Nov. 2016)
- IEC Power In/Out with pigtails (Rev. Nov. 2016)
- Long Life LEDs (Rated at approximately 50,000 hrs.)
- Power Draw: 60W
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Light Source: 18x 3-Watt UV LEDs
- Wavelength: 395-405nm
- Dimensions (LxWxH): 39.5"x2.5"x4.5"/1000x60x110.5mm
- Weight: 6 lbs. / 2.4 kgs

CODE: 1214100004





**GOBO PROJECTORS
& FOLLOWSPOTS/
PINSPTS**





ENCORE PROFILE

1000 WW

Specifications

- Light Source: 1x120W Warm White COB LED source
- Color temperature: 3000°K
- CRI: 98
- Gobos: 4 Gobos included (Gobo Size : 63,5mm/visible 51,25mm , max thickness 2mm)
- Operational Modes: 2 Operating Modes: Dimmer Mode & DMX Controlled
- Channel Modes: 3 DMX Channel Modes: 1/2/3
- Focus: Manual
- Zoom: Manual
- Dimming: 0-100%
- Beam Angle: 12 degree-30 degree
- Connection/Daisy chain: 3 and 5 Pin DMX, Power-Con In and Out for Daisy chaining (Connect up to 5 Fixtures)
- Power consumption: 144W
- Multi-Voltage Operation: AC 100-240V 50/60Hz (non switchable)
- Dimensions (LxWxH): 22"x9.75"x15.25"/560x250x385mm
- Weight: 19 lbs./ 8.5Kgs.

CODE: 1237000134




UC-IR
(Sold Separately)
1321000074



Photometric

	0.5m	1m	2m	3m	4m	5m	Diameter (Meters)
12°	0.11	0.22	0.44	0.66	0.88	1.10	(LUX)
WW	94800	30700	5970	2640	1514	958	
	0.5m	1m	2m	3m	4m	5m	Diameter (Meters)
30°	0.25	0.50	1.00	1.50	2.00	2.50	(LUX)
WW	39600	6760	1346	640	345	209	



ENCORE PROFILE

1000 COLOR

Specifications

- Light Source: 1x120W High Powered RGBW 4-in-1 COB LED source
- Colors: RGBW , 64 static Colors
- Gobos: 4 Gobos included (Gobo Size : 63,5mm/visible 51,25mm , max thickness 2mm)
- Operational Modes: 7 Operating Modes: RGBW Dimmer Mode, Color Change Mode, Color Fade Mode, Auto Run Mode, Static Color Mode, Sound Active Mode, & DMX Controlled
- Channel Modes: 5 DMX Channel Modes: 4/5/6/10/11
- Focus: Manual
- Zoom: Manual
- Dimming: 0-100%
- Beam Angle: 12 degree-30 degree
- Connection/Daisy chain: 3 and 5 Pin DMX, Power-Con In and Out for Daisy chaining (Connect up to 5 Fixtures)
- Power consumption: 144W
- Multi-Voltage Operation: AC 100-240V 50/60Hz (non switchable)
- Dimensions (LxWxH): 22"x9.75"x15.25"/560x250x385mm
- Weight: 19 lbs./ 8.5Kgs.

CODE: 1237000135




UC-IR
(Sold Separately)
1321000074



Photometric

	0.5m	1m	2m	3m	4m	5m	Diameter (Meters)
12°	0.11	0.22	0.44	0.66	0.88	1.10	(LUX)
R	26100	7640	1898	807	452	289	
G	21200	6230	1356	600	318	201	
B	22400	6340	1611	729	392	246	
A	9460	2900	773	338	186.3	111.5	
RGBA	81000	24000	4940	1822	1056	636	

	0.5m	1m	2m	3m	4m	5m	Diameter (Meters)
30°	0.25	0.50	1.00	1.50	2.00	2.50	(LUX)
R	5660	1824	470	197.1	116	68.7	
G	4500	1202	344	147.1	77.3	50.4	
B	5240	1425	402	177.6	93.9	59.4	
A	2580	667	185	80.6	42.4	25.7	
RGBA	20200	4570	1160	506	268	175.3	



RGBW Color Mixing:




IKON PROFILE /PEARL

Specifications

- Light Source: 1x32W LED indoor Mini-Profile Spot/Gobo Projector
- Channel Modes: 4 DMX Channels
- Beam Angle: 15-30 degrees, Manual adjustable Beam Angle and Focus
- Gobos: Includes 1 textured glass GOBO and 4 metal gobos
- Gobo Size: 26,8mm;Viewable size: 24mm
- Life Expectancy: Rated at 50,000 hrs
- Daisy chain: IEC AC outlet on side to Daisy chain power (up to 16 Ikon Profile's @ 120V and 27 Ikon Profile's @ 230V)
- Multi-voltage: 100-240V, 50/60Hz
- Power consumption: 44W
- Dimensions (LxWxH):16"x6"x5"/403x150x127mm
- Weight: 6lbs / 2.7 kg.

IKON PROFILE CODE: 1221500028
IKON PROFILE PEARL CODE: 1221500029

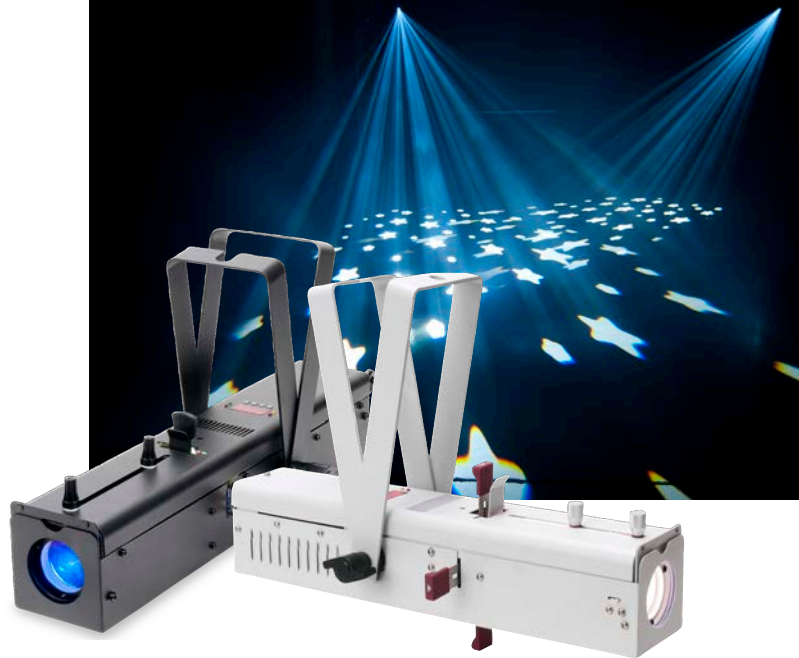

IKON PROFILE WW/PEARL

Specifications

- Light Source: 32W Warm White (3200K) LED
- Channel Modes: 3 DMX Channels
- Beam Angle: 15-30 degrees, Manual adjustable Beam Angle and Focus
- Gobos: Includes Textured Glass Gobo, One Glass Gobo Installed, 4 Metal Gobos Included
- Gobo Size: 26.8mm;Viewable size: 24mmGobo size: 26,8mm; Viewable size: 24mm
- Life Expectancy: Rated at 50,000 hrs
- Daisy chain: IEC AC outlet on side to Daisy chain power (up to 16 Ikon Profile's @ 120V and 27 Ikon Profile's @ 230V)
- Multi-voltage: 100-240V, 50/60Hz
- Power consumption: 44W
- Dimensions (LxWxH): 17.75"x6"x5"/448x150x127mm
- Weight: 6lbs / 2.7 kg.

IKON PROFILE WW CODE: 1221500030
IKON PROFILE WW PEARL CODE:1221500031



FS600LED

Specifications

- Light Source: 1x60W High Powered White LED source
- Colors: 8 Colors (White, Red, Blue, Green, Orange, Yellow, 3200K (Warm White) & Purple)
- Beam Angle: 14 degree - 26 degree
- Typical Throw: 30 meter (14°) to 40 meter (26°)
- LED Strobe Effect: on board control via slider
- Dimming: 0-100% dimming: on board control via slider
- Focus: Manual focusing
- Iris: Manual
- Framing Shutters: Manual Framing
- Connection: 3 and 5 Pin DMX
- Power consumption: 80W
- Multi-Voltage Operation: AC 100-240V 50/60Hz (non switchable)
- Dimensions (LxWxH): 11.5"x19.25"x14.75"/290x484x370mm
- Weight: 18lbs./ 7.8Kgs.

CODE: I226300028



IKON IR

Specifications

- Light Source: 1x60W LED indoor Gobo Projector
- Gobos: Includes 4 replaceable metal Gobo patterns
- Focus: Manual
- Color temperature: 7500K
- Beam Angle: 25, 32 or 43 degrees (Includes 3 different lenses)
- Daisy chain: IEC AC outlet on side to Daisy chain power (up to 9 Ikon IR's @ 120V and 17 Ikon IR's @ 230V)
- Multi-voltage: 100-240V, 50/60Hz
- Power consumption: 74W
- Life Expectancy: Rated at 50,000hrs
- Dimensions (LxVxH): 9.5"x9.5"x8.5"/236x236x215mm
- Weight: 6.6 lbs. / 3 kg.

CODE: I221500027



UC-IR
(Sold Separately)
I321000074

Photometric

(LUX) 25°	8200	1740	763	430	278
(LUX) 37°	5668	1240	550	318	200
(LUX) 27°	3800	765	381	221	150



Distance(m) 0	1.0	2.0	3.0	4.0	5.0
Diameter(m) 25°	0.443	0.887	1.33	1.774	2.217
Diameter(m) 32°	0.573	1.147	1.72	2.294	2.867
Diameter(m) 43°	0.788	1.576	2.363	3.151	3.939

H2O DMX IR


Specifications

- Light Source: 1x80W LED Source
- Features: Simulated water flowing effect, Equipped with 2 glass effect wheels and 1 independent dichroic Color wheel
- Operational Modes: 3 operation modes: Show Mode, Manual Mode, & DMX Control
- Channel Modes: 3 DMX Channels (Dimming, Glass Wheel, Colors)
- Colors: 5 Colors + White & Split Colors
- Beam Angle: 37 degrees or 27 degrees (optional) / 0-100% Dimming (via DMX) / Manual focusing lens
- Power consumption: 70W
- Multi-Voltage Operation: AC 120-240V 50/60Hz (IEC Plug)
- Daisy chain: IEC In & Out to Daisy chain Power (Connect up to 10 Fixtures @ 120V & 17 Fixtures @ 230V)
- Life Expectancy: 30,000 hr. rating
- Dimensions (LxWxH): 11.75"x 9"x 8"/301x232x207mm
- Weight: 9 lbs. / 4 kg.

CODE: I221500025



Photometric

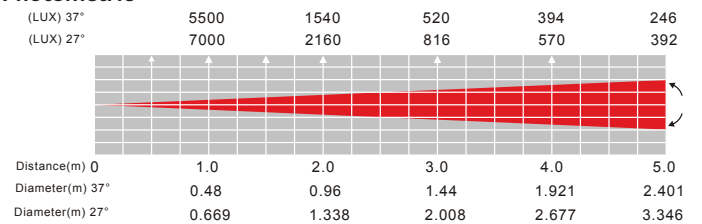

H2O IR


Specifications

- Light Source: 1x12W LED
- Features: Simulated water flowing effect, equipped with 2 glass effect wheels and 1 independent dichroic Color wheel
- Colors: 5 Colors: Orange, Green, Blue, Yellow, Purple + White & Split Colors
- Operational Modes: 2 Operational Modes: seamless scrolling Colors or single Color operation
- Beam Angle: 34 or 43 degrees (optional) / Manual focusing lens
- Power consumption: 23.8W
- Multi-Voltage Operation: 120V/60Hz or 230V/50Hz (IEC Plug)
- Dimensions (LxWxH): 9.25"x9"x7.25"/236x229x187mm
- Weight: 7.7 lbs. / 3.5 kg.

CODE: I221500023



Photometric

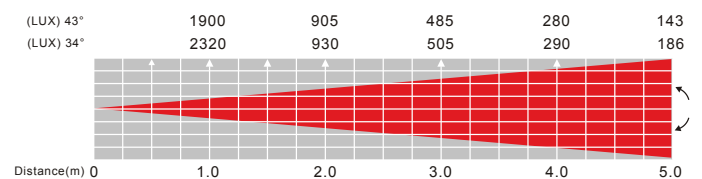

PINSPOT LED II

Specifications

- Light Source: Bright 3W white LED Pinspot with 3-degree beam angle
- Compact high-tech plastic case design
- Long-life LEDs: Rated at approximately 50,000 hrs
- Very low heat output and Power consumption
- Includes hanging bracket
- 12-degree beam angle lens also included
- Dimensions (LxWxH): 7.25"x4"x2.5"/184x99x61mm
- Weight: 1 pound / 0.5 kgs.

CODE: I2I2100001




NEW!

SABER SPOT DTW

Specifications

- Light Source: 15W Warm White LED
- LED Life Expectancy: 10,000 Hrs
- Beam Angle: 20-degrees
- Color temperature: 3100K (Warm White); 1900K (Amber)
- LUX: 726 @ 3M
- CRI (Full on): 92
- Channel Modes: 3 DMX Channel Modes: 1, 2 or 4
- Control: 4-button Digital Display for easy navigation
- Connection: 3-pin DMX In/Out pigtailed
- 16-bit Electronic Dimming: 0 – 100%
- Variable Strobe: 1-20Hz
- Daisy chain: 33 fixtures (@120V); 71 fixtures (@230V)
- Multi-voltage: 100-240V 50Hz/60Hz
- Power consumption: 24W
- Dimensions (LxWxH): 3.5"x6.75"x3.5"/88x170x87mm
- Weight: 2.6 lbs / 1.2 kg.

CODE: I226100353

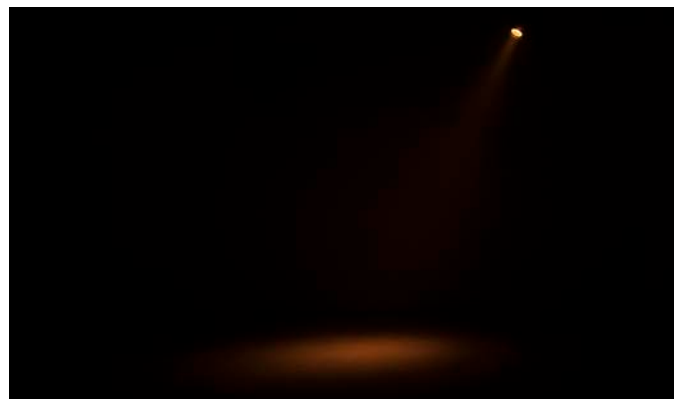

SABER SPOT WW

Specifications

- Light Source: 15W Warm White LED
- LED Life Expectancy: 10,000 Hrs
- Beam Angle: 4-degrees
- Color temperature: 3000K (Warm White)
- CRI (Full on): 95.5
- Channel Modes: 2 DMX Channel Modes: 1 or 2 Channel Modes:
- Control: 4-button LED display on rear panel
- Connection: 3-pin DMX In/Out pigtailes
- Electronic Dimming: 0 – 100%
- Multi-voltage: 100-240V, 47/63Hz
- Power consumption: 15W max
- Dimensions (LxWxH): 3.5"x6.75"x3.5"/88x170x87mm
- Weight: 2.6lbs./1.2kgs

CODE: I226100330



SABER SPOT RGBW

Specifications

- Light Source: 15W LED (4-in-1) Quad RGBW LED
- LED Life Expectancy: 10,000 Hrs
- Beam Angle: 4-degrees
- Channel Modes: 11 DMX Channel Modes: 3/4/4/5/6/6/8/8/9/11/12 Channel Modes:
- Operational Modes: 3 Operational Modes: Show Mode, Manual Mode and DMX-512 Mode
- Control: 4-button LED display on rear panel
- Connection: 3-pin XLR In/Out pigtailes
- 16-bit Electronic Dimming: 0 – 100%
- Multi-voltage: 100-240V, 47/63Hz
- Power consumption: 14W
- Dimensions (LxWxH): 3.5"x6.75"x3.5"/88x170x87mm
- Weight: 2.6 lbs / 1.2 kg.

CODE: I226100331



RGBW Color Mixing:





**ATMOSPHERIC
EFFECTS**

ENTOURAGE

Specifications

- Professional grade touring 1500W Faze Machine built into a durable flight case
- 3 DMX Channel Modes;; 1/2/4
- LCD Function Display with built-in remote with Fog Timer, Continuous Fogging, & Manual Fogging
- Warm-up time: 45 Seconds
- Output: 15,000 cubic ft./425m3 per min
- External fog fluid tank: 5.6 Liter
- 3-pin & 5-pin DMX In/Out
- Power-Con Input
- Only use high quality, water based fog fluid
- Dimensions (LxWxH): 21"x15.25"x9.75"/533x387x249mm
- Weight: 47 lbs. / 21.3 kg.



CODE: 1411100019

ENTOUR VENUE

Specifications

- 1500W mobile DMX Faze Machine
- 3 DMX Channel Modes;; 1/2/4
- LCD Function Display with built-in remote with Fog Timer, Continuous Fogging, & Manual Fogging
- Warm-up time: 45 Seconds
- Output: 15,000 cubic ft./425m3 per min
- External fog fluid tank: 5.6 Liter
- 3-pin & 5-pin DMX In/Out
- Hanging bracket
- Only use high quality, water based fog fluid
- Dimensions (LxWxH): 15.5"x17"x10"/394x434x253mm
- Weight: 23 lbs. / 10,6 kg.

CODE: 1411100020



ENTOUR SNOW

Specifications

- Mobile DMX Snow Machine
- 3 DMX Channel Modes;; 1/3/6
- No warm-up time necessary
- Fan speed adjustment 50% or 100%
- Output: Highest Height: 10m; Longest Distance: 12m
- Power consumption: 1250W
- 3-pin & 5-pin DMX In/Out
- PowerCON Input
- Uses ADJ Snow fluid
- Hanging Bracket
- Safety cable latch
- On/Off button
- 1/4-inch jack for optional remote controller
- Dimensions (LxWxH): 21.5"x14.75"x17.25"/550x376x 439mm
- Weight: 30 lbs. / 13.5 kg.

CODE: 1411100026



ENTOUR CYCLONE

Specifications

- High Velocity Fan for use with Stage Foggers and Hazers/Fazers
- Max Fan volume : 30m3/min
- Fan Angle : 0°-360°
- 2 DMX Modes : 1 or 2 channel Mode
- Fan Speed adjustment 0-100%
- 4-button LCD Display for easy configuration
- Rotary Speed Knob on rear for manual control
- 1/4 Jack input for optional remote control
- Safety loop on rear
- 3 pin DMX in/out
- Power-Con in/out for daisy-chaining
- Max Power draw : 130W
- Dimensions (LxWxH): 422x350x131mm
- Weight : 8,56kg

CODE: I411100027



NEW!

ENTOUR HAZE PRO

Specifications

- Professional Stage Hazer
- 3 DMX Channel Modes: 1/2/4
- LCD Function Display with built-in remote with Haze Timer, Continuous
- Hazing & Manual Hazing
- No Warm-up time necessary
- Air Pressure: 101 psi
- Output: 2,800 cubic ft. per min
- Internal fluid tank: 2.5 Liter
- Fluid Consumption Rate: 50ml/hour
- 3 & 5-pin DMX In/Out
- Power consumption: 460W
- PowerCON Input
- Uses ADJ oil based Haze Fluid only
- Dimensions (LxWxH): 20.75"x15"x15"/530x380x380mm
- Weight: 70 lbs. / 31 kg.

CODE: I411100028



NEW!

ENTOUR VT-1 CONTROLLER

Specifications

- VT-1 Controller is a cabled remote control for Entour Cyclone and Entour Snow
- Cable length : 8m
- Connector : 1/4 Stereo Jack
- Dimensions (LxWxH): 90x50x39mm
- Weight: 0,257kg

CODE: I411100029



FOG FURY JETT PRO

Specifications

- LED and/or FOG effect combination
- WiFLY EXR Wireless DMX (up to 2,500 ft. /760M line of sight)
- ADJ's Electronic Thermo Sensing (ETS) technology
- Safety cable eye bolt
- Optical: 28 x 3-Watt LEDs (6 Red, 7 Green, 6 Blue, 3 Amber & 6 UV LEDs)
- Output: 40,000 Cubic Feet/1.132m³ Per minute
- Heater: 1450 Watts
- Heat Up Time: 9 min
- Fluid Type: Water Based Fog Fluid, ADJ Fog Juice CO₂
- Fluid Consumption: 150ml/min
- On board control or Wireless DMX
- Data: 3-pin & 5-pin DMX In/Out
- DMX Channels: 1, 2, 3, 7 or 9 DMX Channels
- Integrated WiFLY EXR Wireless DMX
- Remote Control Included: FFJWR
- Dimensions (LxWxH): 16.5"x12.5"x8"/419x315x206mm
- Weight: 21 lbs. /9.5 kg
- Tank Size: 2.5 Liter removable tank

CODE: 1411100021



FOG FURY JETT

Specifications

- 700W professional DMX vertical Fog Machine with 12x3-Watt LEDs
- ADJ's Electronic Thermo Sensing (ETS) technology
- Automatic circuit cut-off to protect pump if fog fluid tank runs dry
- Special heating element design that uses an oil type transmission
- Pipeline system to minimize the possibility clogging
- 3 Operational Modes: Manual, Remote Control, or DMX Controlled / 4 DMX Channels
- External fog fluid tank: 3 Liter / Fog Output: 20,000 (cu.ft 566m³/min)
- Tank can be mounted to either front or rear
- Included Accessory: ADJ FF23TC - wireless remote
- Power Connection: IEC AC In
- Light Source: 12 x 3w RGBA LED's, (3 Red, 3 Green, 3 Blue & 3 Amber LED's)
- Voltage: AC 120V, 230 or 240 50/60Hz (non switching)
- Dimensions (LxWxH): 15.5"x12"x7.5"/397x302x191mm
- Weight: 16 lbs. / 7.1 kg.

CODE: 1411100017



VF VOLCANO

Specifications

- 750W professional vertical Fog Machine with 6 x 3-Watt LEDs
- ADJ's Electronic Thermo Sensing (ETS) technology
- High performance pump for optimum output
- Special heating element design that uses an oil type transmission pipeline system to minimize the possibility clogging
- 2 Operational Modes: Manual & Remote Control
- Warm-up time: 6 min
- External fog fluid tank: 1 Liter/Fog Output: 8,000 (cu.ft 226m³/min)
- Only use high quality, water-based fog fluid
- Included Accessory: VFV-WR wireless remote
- Power consumption: 770W
- Light Source: 6 x 3-Watt LEDs, (2 Red, 2 Green, & 2 Blue LEDs)
- Voltage: AC 120V or 240 50/60Hz (non switching)
- Dimensions (LxWxH): 13"x8.25"x7"/327x212x177mm
- Weight: 7.4 lbs. /3.36 kg.

CODE: 1411100018



FOG FURY 3000

Specifications

- 3 Operational Modes: Fog Volume, Fog Duration, & DMX Controlled
- 3 DMX Channel
- 4-button DMX LCD display on rear panel
- ETS "Electronic Thermo Sensing" to always maintain optimum heat.
- Cut off Circuit to protect pump if fog liquid tank runs dry
- Fluid LED Color ready tank indicator
- Heater: 1500W / Warm up time (min): 8
- Tank(liter): 5 L / Fog Output: 21000 (cu.ft/min)
- Power consumption: 1600W (Full On)
- Voltage Operation: AC 120 or 230V, 50/60Hz
- Dimensions (LxWxH):
- 18.75" x 13.75" x 12.75" / 475 x 345 x 321mm
- Weight: 25 lbs. / 11.28 kgs

CODE: 1411100008

Compatible Remotes

FF23WR Wireless Remote



FF23TR Timer Remote



FOG FURY 2000

Specifications

- Fluid LED Color ready tank indicator
- ETS "Electronic Thermo Sensing" to always maintain optimum heat.
- Cut off Circuit to protect pump if fog liquid tank runs dry
- Heater: 1100W / Warm up time (min): 8
- Tank(liter): 2.5 L / Fog Output: 7000 (cu.ft/min)
- Includes wired remote control
- Power consumption: 1200W (Full On)
- Voltage Operation: AC 120 or 230V, 50/60Hz
- Dimensions (LxWxH):
- 16.75" x 11.75" x 9" / 421 x 295 x 224mm
- Weight: 16 lbs. / 6.89 kg.
- Only use high quality, water-based fog fluid

CODE: 1411100007

Compatible Remotes

FF23WR Wireless Remote



FF23TR Timer Remote



FOG FURY 1000 II

Specifications

- 650W compact, high output Fog Machine
- Visible fog fluid level indicator on rear
- High performance pump for optimum output
- Special heating element design that uses an oil type transmission pipeline system to minimize the possibility clogging
- LED heating indicator system in tank: Red = Heating; Green = Ready to use
- Fog Output: 3500 (cu.ft/min)
- Warm-up time: 4 min.
- Internal fog fluid tank: 0.9 Liter
- Single yoke to mount on a wall or from trussing bracket
- Includes On/Off hardwired remote control with 9ft./3M cable
- Heater: 650W
- Power consumption: 700W max
- Power: AC 120V/60Hz or 230V/50Hz (non switching)
- Dimensions (LxWxH): 184 x 99 x 61mm
- Weight: 2.95 kg.
- Only use high quality, water-based fog fluid

CODE: 1411100023



VF1600

Specifications

- 1500W mobile DMX Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for consistent heating
- Fog fluid sensor to protect pump
- Warm-up time: 8 minutes
- Output: 20,000 cubic ft. 566m3/min
- External fog fluid tank: 2.3 Liter
- Includes wired remote (Wireless remote control sold separately)
- Fog output switch on rear panel
- 3-pin DMX In/Out
- Uses water based fog fluid
- Dimensions (LxWxH): 19.5" x 14" x 9" / 495x355x230mm
- Weight: 22 lbs. / 10 kg.

CODE: 1411100016

VF1300

Specifications

- 1300W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for consistent heating
- Fog fluid sensor to protect pump
- Warm-up time: 7 minutes
- Output: 12,000 cubic ft. 340m3/min
- External fog fluid tank: 2.3 Liter
- Fog output switch on rear panel
- Uses water based fog fluid
- Dimensions (LxWxH): 17.5" x 12.5" x 8" / 445x315x200mm
- Weight: 15 lbs. / 7 lbs.

CODE: 1411100015

VF1100

Specifications

- 1000W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for optimum heating levels
- Low fog fluid shut off sensor to protect pump
- Warm-up time: 6 minutes
- Output: 9,000 cubic ft. per min
- Internal fog fluid tank: 1 Liter
- Fluid level indicator
- Includes ADJ VF5PR wired remote
- ADJ VFWR Wireless remote control is included
- Fog output switch on rear panel
- Only use high quality, water-based fog fluid
- Dimensions (LxWxH): 13.75" x 9.5" x 10" / 350 x 240 x 250mm
- Weight: 8 lbs. / 3.64 kg.

CODE: 1411100024

VF400

Specifications

- 400W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Warm-up time: 3 minutes
- Output: 3,000 cubic ft. 85m3/min
- Internal fog fluid tank: .5 Liter
- Fluid level indicator
- Includes wired remote
- Uses water based fog fluid
- Dimensions (LxWxH): 9.5" x 8" x 5.5" / 240x200x140mm
- Weight: 4 lbs. / 2 kg.

CODE: 1411100013

Remote Control
(Included)

VFTR Timer
Remote



Remote Control
(Included)

VFWR2 Wireless
Remote



Remote Control
(Included)

VF5PR Timer
Remote



Remote Control
(Included)

VFWR2 Wireless
Remote



Optional
(Not Included)

VFTR13 Timer
Remote



Remote Control
(Included)

VF5PR Timer
Remote



Remote Control
(Included)

VFWR Wireless
Remote



Remote Control
(Included)

VF400R Timer
Remote



MISTER KOOL II

Specifications

- Low-lying fog stays low to the ground similar to a dry ice effect
- Uses standard fog juice and ice cubes
- No need for expensive fog chillers, bulky air conditioning units or dry ice
- Includes non-removable timer remote with On/off switch
- Perfect for Halloween and theatrical events
- Load up to 2 kg of ice in the chiller box
- Water drainage valve system allows for easy cleanup. Water drains directly into the provided plastic bag.
- Heater: 400W
- Fog fluid container: 1/2 liter (external)
- Dimensions (LxWxH): 490 x 315 x 260 mm
- Weight: 8kg

CODE: 1411100025



VF SNOW FLURRY HO

Specifications

- 1250W mobile DMX Snow Machine
- Spray distance: 8-10 meters
- Volume selection switch: Low or high snow output
- Low snow fluid sensor to protect pump
- Internal snow fluid tank: 2.3 Liter
- Fluid level indicator
- Includes wired remote
- ADJ UC IR Compatible (Sold Separately)
- On/Off switch on rear panel
- 3-pin DMX In/Out
- Uses water based snow fluid
- Dimensions (LxVxH): 20" x 12.5" x 13.75" / 510 x 316 x 349mm (With Bracket)
- 20" x 12.5" x 10.5 / 510 x 316 x 268mm (Without Bracket)
- Weight: 18 lbs. / 8 kg

Remote Control (Included)

VFFR Timer Remote



CODE: 1223100003

VF FLURRY

Specifications

- 600W mobile Snow Machine
- Spray distance: 2-5 meters
- Volume selection switch: Low or high snow output
- Snow fluid sensor to protect pump
- Internal fog fluid tank: 1 Liter
- Fluid level indicator
- Includes wired remote
- On/Off switch on rear panel
- Uses water based snow fluid
- Dimensions (LxVxH): 13.5" x 10" x 8" / 340x255x200mm
- Weight: 8 lbs. / 3.8 kg.

Remote Control (Included)

VFFR Timer Remote



CODE: 1223100002

BUBBLETRON

Specifications

- Portable high output bubble machine - creates hundreds of bubbles per minute
- Large high velocity fan makes bubbles rise quickly in the air
- ON/OFF switch on rear of unit and ON/OFF wired remote with 25 ft./8M cable
- Most types of bubble liquid acceptable
- Power consumption: 24W
- Capacity of bubble juice: 1 Liter
- Fluid Consumption Rate: 1 Liter every two hours
- Multi-voltage: AC 120-230V, 50/60Hz
- Dimensions (LxWxH): 14"x7"x8.25" / 352x176x209mm
- Weight: 4 lbs. / 2kg.

CODE: I212100006



BUBBLETRON GO

Specifications

- Portable high output bubble machine - creates hundreds of bubbles per minute
- Durable plastic casing with EZ-Access front fluid tank
- Large high velocity fan makes bubbles rise quickly in the air
- ON/OFF switch on rear of unit
- ON/OFF wireless remote BUBGO-WR included
- Carrying handle
- Most types of bubble liquid acceptable
- Power consumption: 24W (120V); 10W (230V)
- Fluid Consumption Rate: 1 Liter every 50 Min's. (120V); 1 Liter every 90 Min's. (230V)
- Battery Charge Time: 6 Hours (Per Cycle)
- Battery Life: 5 Hours (Full On)
- Battery type : Li-Poly, 12V 4.0Ah
- Multi-voltage: AC 100-240V, 50/60Hz (Charger) DC 12V 1000mA
- Dimensions (LxWxH): 352 x 176 x 209mm
- Weight: 2kg.

CODE: I212100014



BUBBLETRON XL

Specifications

- Portable high output bubble machine - creates hundreds of bubbles per minute
- Extra-large, durable plastic casing with EZ- Access front fluid tank
- Large dual high velocity fans makes bubbles rise quickly in the air
- ON/OFF switch on rear of unit
- Carrying handle
- Most types of bubble liquid acceptable
- Power consumption: 37W @ 120V / 14W @ 230V
- Tank Capacity: 2 Liter
- Fluid Consumption Rate: 40ml/per minute
- Voltage: AC 120/60Hz or 230V/60Hz
- Dimensions (LxWxH): 359x266x278mm
- Weight: 9lbs. / 3.7kgs.
- Includes 9-foot / 3M On/Off Wired Remote Control

CODE: I411100022



FF23TR

Specification

- Timer Remote
- Duration Control
- Interval Control
- Power On/Off Switch
- DMX 3-pin XLR input
- Manual/DMX control (dip switch addressing)
- Manual Fogging

Compatible With:

- Fog Fury 2000 (optional)
- Fog Fury 3000 (included)
- Fog Fury 3000 WIFLY (included)
- Fog Fury Faze (optional)



CODE: I221000008

VFTR13

Specification

- Timer Remote
- Interval Control
- Duration Control
- Timer On/Off Button
- Continuous Fog
- Manual Fogging

Compatible with:

- VF1300 (optional)
- VF1000 (optional)



CODE: I223200037

FF23WR

Specification

- Wireless Remote
- Power On/Off Button
- Manual Fogging Button

Compatible With:

- Fog Fury 2000 (optional)
- Fog Fury 3000 (optional)
- Fog Fury 3000 WIFLY (optional)
- Fog Fury Faze (optional)



CODE: I411100012

VF5PR

Specification

- Manual Fogging

Included With:

- VF1300
- VF1000



CODE: 9900006271

VFTR

Specification

- Timer Remote
- Duration Control
- Interval Control
- Output Level Control
- Timer On/Off Switch
- Continuous Fog
- Manual Fogging

Included With:

- VF1600



CODE: 9900006329

VFWR

Specification

- Wireless Remote
- Controls up to 4 fog Machines
- 4 Assignable Buttons

Included With:

- VF1000



CODE: 9900006330

VFWR2

Specification

- Wireless Remote
- Controls up to 4 Fog Machines
- 4 Assignable buttons

Included With:

- VF1600
- VF1300



CODE: 9900006327

VFFR

Specification

- Timer Remote
- Output Volume Control
- In Use indicator
- Low Liquid Indicator
- On/Off Fogging Switch

Included With:

- VF Flurry



CODE: 9900006328

FFJPWR WR

Specification

- Wireless Remote

Included With:

- Fog Fury Jett
- Fog Fury Jett Pro



CODE: I221000009



Fog Juice 1 light



Fog Juice 1 light: made for making laser and light shows visible

1 Liter CODE: I421200023
5 Liter CODE: I421200006
20 Liter CODE: I421200009

Fog Juice CO2



Fluid for fog machines to create long lasting smoke and fog effects. To use in professional applications like shows, concerts, clubs or theaters. Fog Juice CO2: Very short lasting CO2 effect fluid. Perfect for use with Fog Fury Jett and Fog Fury Jett Pro

5 Liter CODE: I421200022

Fog Juice 2 medium



Fog Juice 2 medium: standard fog juice for clubs & disco recommended also for use in Fog Fury Faze, Entourage & Entour Venue Fazer

1 Liter CODE: I421200024
5 Liter CODE: I421200007
20 Liter CODE: I421200010

Haze Fluid oil based

NEW!



The ADJ oil based Haze Fluid was developed to match with the generators creating fog with vaporizing system through compression like the Entour Haze Pro -Not suited for Entourage and Entour Venue Fazers

5 Liter CODE: I421200026

Fog Juice 3 heavy



Fog Juice 3 heavy: long lasting effective smoke effects

1 Liter CODE: I421200025
5 Liter CODE: I421200008
20 Liter CODE: I421200011

Haze Fluid water based

NEW!



This water based Haze Fluid was developed to match with the generators creating fog with vaporizing system through compression like the Entour Venue and Entourage -This Haze Fluid is not suited for oil crackers like the Entour Haze Pro.

5 Liter CODE: I421200027

Cleaning Fluid



- Cleaning fluid for regular fog machines
- 250ml = enough for 5 full cleanings
- Cleans your fog machine from fluid residues
- Extends the life time of your fog machine enormously
- Gives you again a full blast of fog when heater was dirty
- It's recommended to clean machines after every 30h usage
- Acid! Keep away from children, eyes and skin

250 ml CODE: I221200004

Bubble Juice



Ready to use 5 litre Bubble Juice.

5 Liter CODE: I422200001

Snow Juice



- 5 Liter high quality snow fluid
- Produces foam flakes
- Odorless

5 Liter CODE: I223200004

FOG SCENT

- CHERRY: I211200003
- BANANA: I211200004
- MINT: I211200005
- TUTTI FRUTTI: I211200006
- APPLE: I211200007
- COCONUT: I211200008
- VANILLA: I211200009
- LEMON: I211200010

Used for creating smell in artificial smoke liquid which are used in application such as shows or professional training

Composition: is a mix of mineral oil, undecylpolyoxyethylen, various ethoxyl alcohol, methyl, different essences and osmized water. It is neither an eye nor a skin irritant. Comes in different fragrances. Size: 20 ml

BUBBLE PERFUME

- RED ENERGY: I212200017
- TUTTI FRUTTI: I212200018
- COFFEE: I212200019
- GALA CHAMPAGNE: I212200016

Works with all bubble fluids. For Use with Bubble machines. Comes in different fragrances. Size: 20ml



Mirrorballmotor

1U/min (50cm/10kg)



Specifications

- Heavy-duty 1 R.P.M. Mirror Ball Motor
- For use with up to a 20-inch (50cm) mirror ball
- Rotation speed: 0.8–1 R.P.M.
- Indoor Use Only
- Max load: 22 lbs. / 10kg.
- Power: AC 120V/60Hz or 230V/50Hz (non switchable)
- (L x W x H): 5.5" x 5.5" x 3.25" / 136x136x80mm
- Weight: 2.5 lbs. / 1.055 kg

CODE: 1221200003

Mirrorballmotor

1,5U/min (100cm/40kg)



Specifications

- Heavy-duty professional mirror ball motor
- For use with up to a 40-inch (1m) mirror ball
- Easy-to-use: plug and play
- Rotation speed: 1 – 1.5 R.P.M.
- Indoor Use Only
- Max load: 89 lbs. / 40kgs.
- Power: AC 120V/60Hz
- Dimensions (LxWxH): 11.25" x 9.5" x 4.5" / 280 x 240 x 110mm
- Weight: 6 lbs. / 2.5 kgs.

CODE: 1221200001

Mirrorballs



Specifications

- Mirrorball with solid plastic core
- High stability through continuous axis
- Continuous bonding
- Real glass mirrors
- Holding bail
- Additional security bail for security chain safety
- Motor not included

1211100001	5cm
1211100002	10cm
1211100003	20cm
1221100004	30cm
1221100005	40cm
1221100006	50cm
1221100007	1m

NEW!

LTS COLOR

Specifications

- Total Height Range: 57 inches (1450mm) to 137 inches (3500mm)
- Includes 4 Nuts and bolts to hang lighting fixtures
- Load Capacity: 100 lbs. / 45 kg.
- Material: Steel + PVC
- Includes IR remote & 12V power supply
- 22 Dynamic Modes
- 20 Static Colors
- Direct Color Select
- Speed Adjustable
- Brightness adjustment
- Demo Program Mode
- Remote Distance 15m in open area
- Lighting fixtures sold separately
- Stand weight: 13 lbs.

CODE: 1731000005

LTS-6

Specifications

- Extends up to 9ft/270cm.
- LTS-6 comes with T-bar with 8 hanging point bolts
- Max evenly distributed load : 25kg
- LTS-6 comes with T-bar with 4 hanging point bolts
- Includes FS-Adapter - designed to mount one light at a time at the top of the stand
- Weight: 11 lbs. / 4.9 kg

CODE: 1731000006

DJ-MTS 4

Specifications

- Height of the first table rails: 57cm
- Height of the second table rail: 93cm
- Width of the complete stand system (without T-Bars): 126cm
- Depth of the system: 38cm
- Min. height of T-bars: 211cm
- Max height of T-Bars: 251cm
- The 2 T-bars can be connected with screws: max width: 260cm
- Distance from one rail to the next: 32cm
- Adjustable feet
- Max vertical load for T-Bars: 30kg


CODE: 1739000002

DJ-MTS 4 Bag

Specifications

- Bag for DJ-MTS 4 stand.

CODE: 1739000003

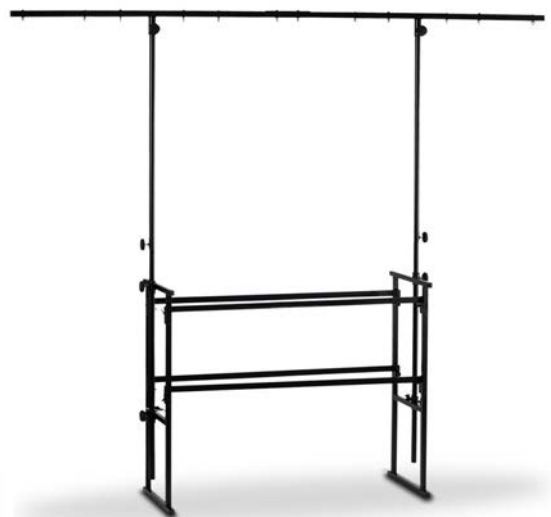

Color Stand LED

Specifications

- Height adjustment 3.6ft - 6.14ft / 96cm - 180cm
- Load Capacity 66lbs/ 27kg
- Upper shaft tubing 35mm
- Material: Steel + PVC
- Includes RF remote
- 22 Dynamic Modes
- 20 Static Colors
- Direct Color Select
- Speed Adjustable
- Brightness adjustment
- Demo Program Mode
- Remote Distance up to 15m in open area

CODE: I16300013



LSS-3S, PRO -speaker stand steel, black

Specifications

- Very stable metal construction
- With safety bolt
- 35 mm mast diameter
- With safety bolt
- Maximum height: 2m
- Minimum height with safety bolt: 1,46m
- Minimum height w/o safety bolt: 1,22m
- Color: black
- Max load: 40kg

CODE: I163900003



Tripod Cover

Specifications

- The Tripod Cover offers the opportunity to grade up your speaker stand on special occasions like weddings, galas and company events. Place your led-effect behind the Tripod Cover and your speaker stand will become an eye-catcher.
- The cover can be washed at 30° one time and should be impregnated with a fire retardant liquid after the second wash.

CODE: I724400045



SWB40 - wall mount speaker bracket 40kg

Specifications

- Maximum load: 40kg
- Length: 31 cm
- Max pivoting radius: 180°
- Base plate: 20 x 15 cm
- Weight: 2,1kg

CODE: I163200003



SB-2 Bag for 2 stands

Specifications

- SB-2 Bag for 2 speaker stands
- Dimensions : 1240x220x220cm

CODE: I154000014






Microstand PRO-MS1 tripod, extend. Boom

Specifications

- Professional steel stand
- Retractable legs
- Noise reduction rubber feet
- Length of legs: 31cm
- Length of boom arm: 80cm
- Max height incl. boom arm: 2,10 Meter
- Solid manufacture for stage use
- Extension with easy-screw mechanics
- Incl. cable clip

CODE: 1753900001

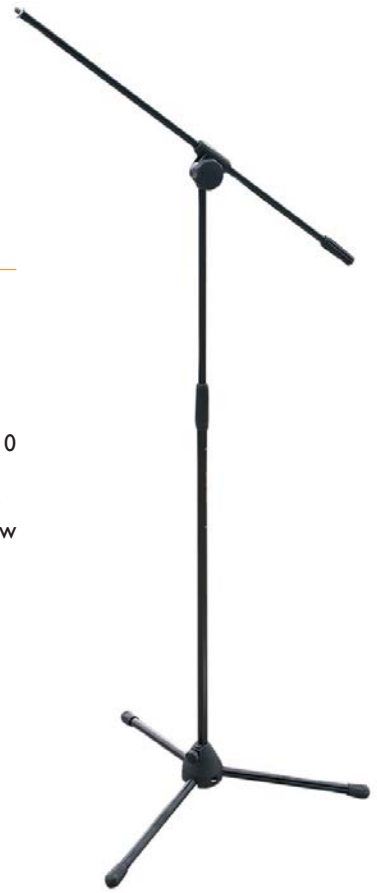

Microstand PRO-MS2 cast-iron base

Specifications

- Black microphone stand
- Special rubber coating for noise reduction on base
- Diameter base: 25cm
- Screw thread 3/8 inch
- Max height: 1,60m
- Solid manufacture for stage use
- Extension with easy-screw system
- Incl. cable clip

CODE: 1753900002

Microphone stand small ECO-MS3

Specifications

- A low microphone stand for bass drums, guitar amps etc.
- Adjustable height and shock absorbent rubber feet.
- Noise reduction, rubber feet
- Length of legs: 25cm
- Max. height: 0,76m
- Dual extension
- Length of boom arm (twice extended): 70cm

CODE: 1753900005



**MCI Microphone
holder, clamp,**

black

CODE: 1154000012



**MC2 Microphone
holder, rubber,**

black

CODE: 1154000013



**MC3 Microphone
holder,**

rubberized

CODE: 1154000015



**MC4 Microphone
holder,**

mini

CODE: 1154000043



OSLIM 2

The ADJ O Slim 2 Clamp is designed to fit in-between the “V” shaped truss braces where larger size clamps will not fit. It can also be used like a traditional ADJ O-Clamp to hang smaller fixtures under 28 lb/13 kg. The O Slim 2, like the ADJ O-Clamp, wraps around the entire 2-inch truss pipe to avoid scuffing, scratching and denting of truss.

CODE: 1741000057



MINI O-CLAMP

Mini O-Clamp: Fits 3/4 inch - 19 mm Truss. 360° wrap around tube truss clamp. Securely mounts fixtures to the truss braces (Non scuffing - Non scratching - Non scoring - Non denting)

CODE: 1741000058



LIGHT BRIDGE CLAMP BLACK

Black Mini truss clamp for Light Bridge One SYSTEM (suits 16mm tube diameter). Carries light effects, par cans etc up to 10kg.
CODE: 1741000013



LIGHT BRIDGE CLAMP

Mini truss clamp for Light Bridge One. Max. Load 20 kg

CODE: 1741000015



BABY CLAMP

Specifications
Baby Clamp: Ideal for fixtures under 10 lbs./5 kg
i.e. pinspots & Par-38 Cans

CODE: 1741000008



BOX-2 adapter for lights&bars, M8

Specifications

- Stand adapter with M8 screw
- Inner diameter 35mm
- Durable steel, black coated
- Diameter of dish: 9cm
- Great to mount light effects and PARs on stands
- Suitable for all stands with 35mm tube

CODE: 1163200002

Floor Stand

FS4LB black



To turn your PAR can into a floor PAR simply open the floor bracket and fix it to the existing bracket of the PAR can.

Specifications

- Rubber feet
- M10 screw included
- Feet length: 23 cm (total)
- Height: 3 cm
- Max load: 15 kg

CODE: I226100032

TV-SPIGOT

Spigot (TV-plug) for standard stands 28 mm with M10 screw

CODE: I741000014



SAFETY CABLES

L	30 cm
Ø	2 mm
L	80 cm
Ø	2 mm
L	140 cm
Ø	3.2 mm

I744000003 5 kg

I744000002 5 kg

I744000001 5 kg



L	60 cm
Ø	3 mm
L	60 cm
Ø	4 mm
L	60 cm
Ø	5 mm
L	60 cm
Ø	6 mm
L	60 cm
Ø	8 mm
L	100 cm
Ø	8 mm

I744000004 10 kg

I744000005 30 kg

I744000006 45 kg


I744000007 60 kg

I744000008 100 kg

I744000009 100 kg




To use safeties is law in most locations.



ACCU-CASE™

PLAY IT SAFE...

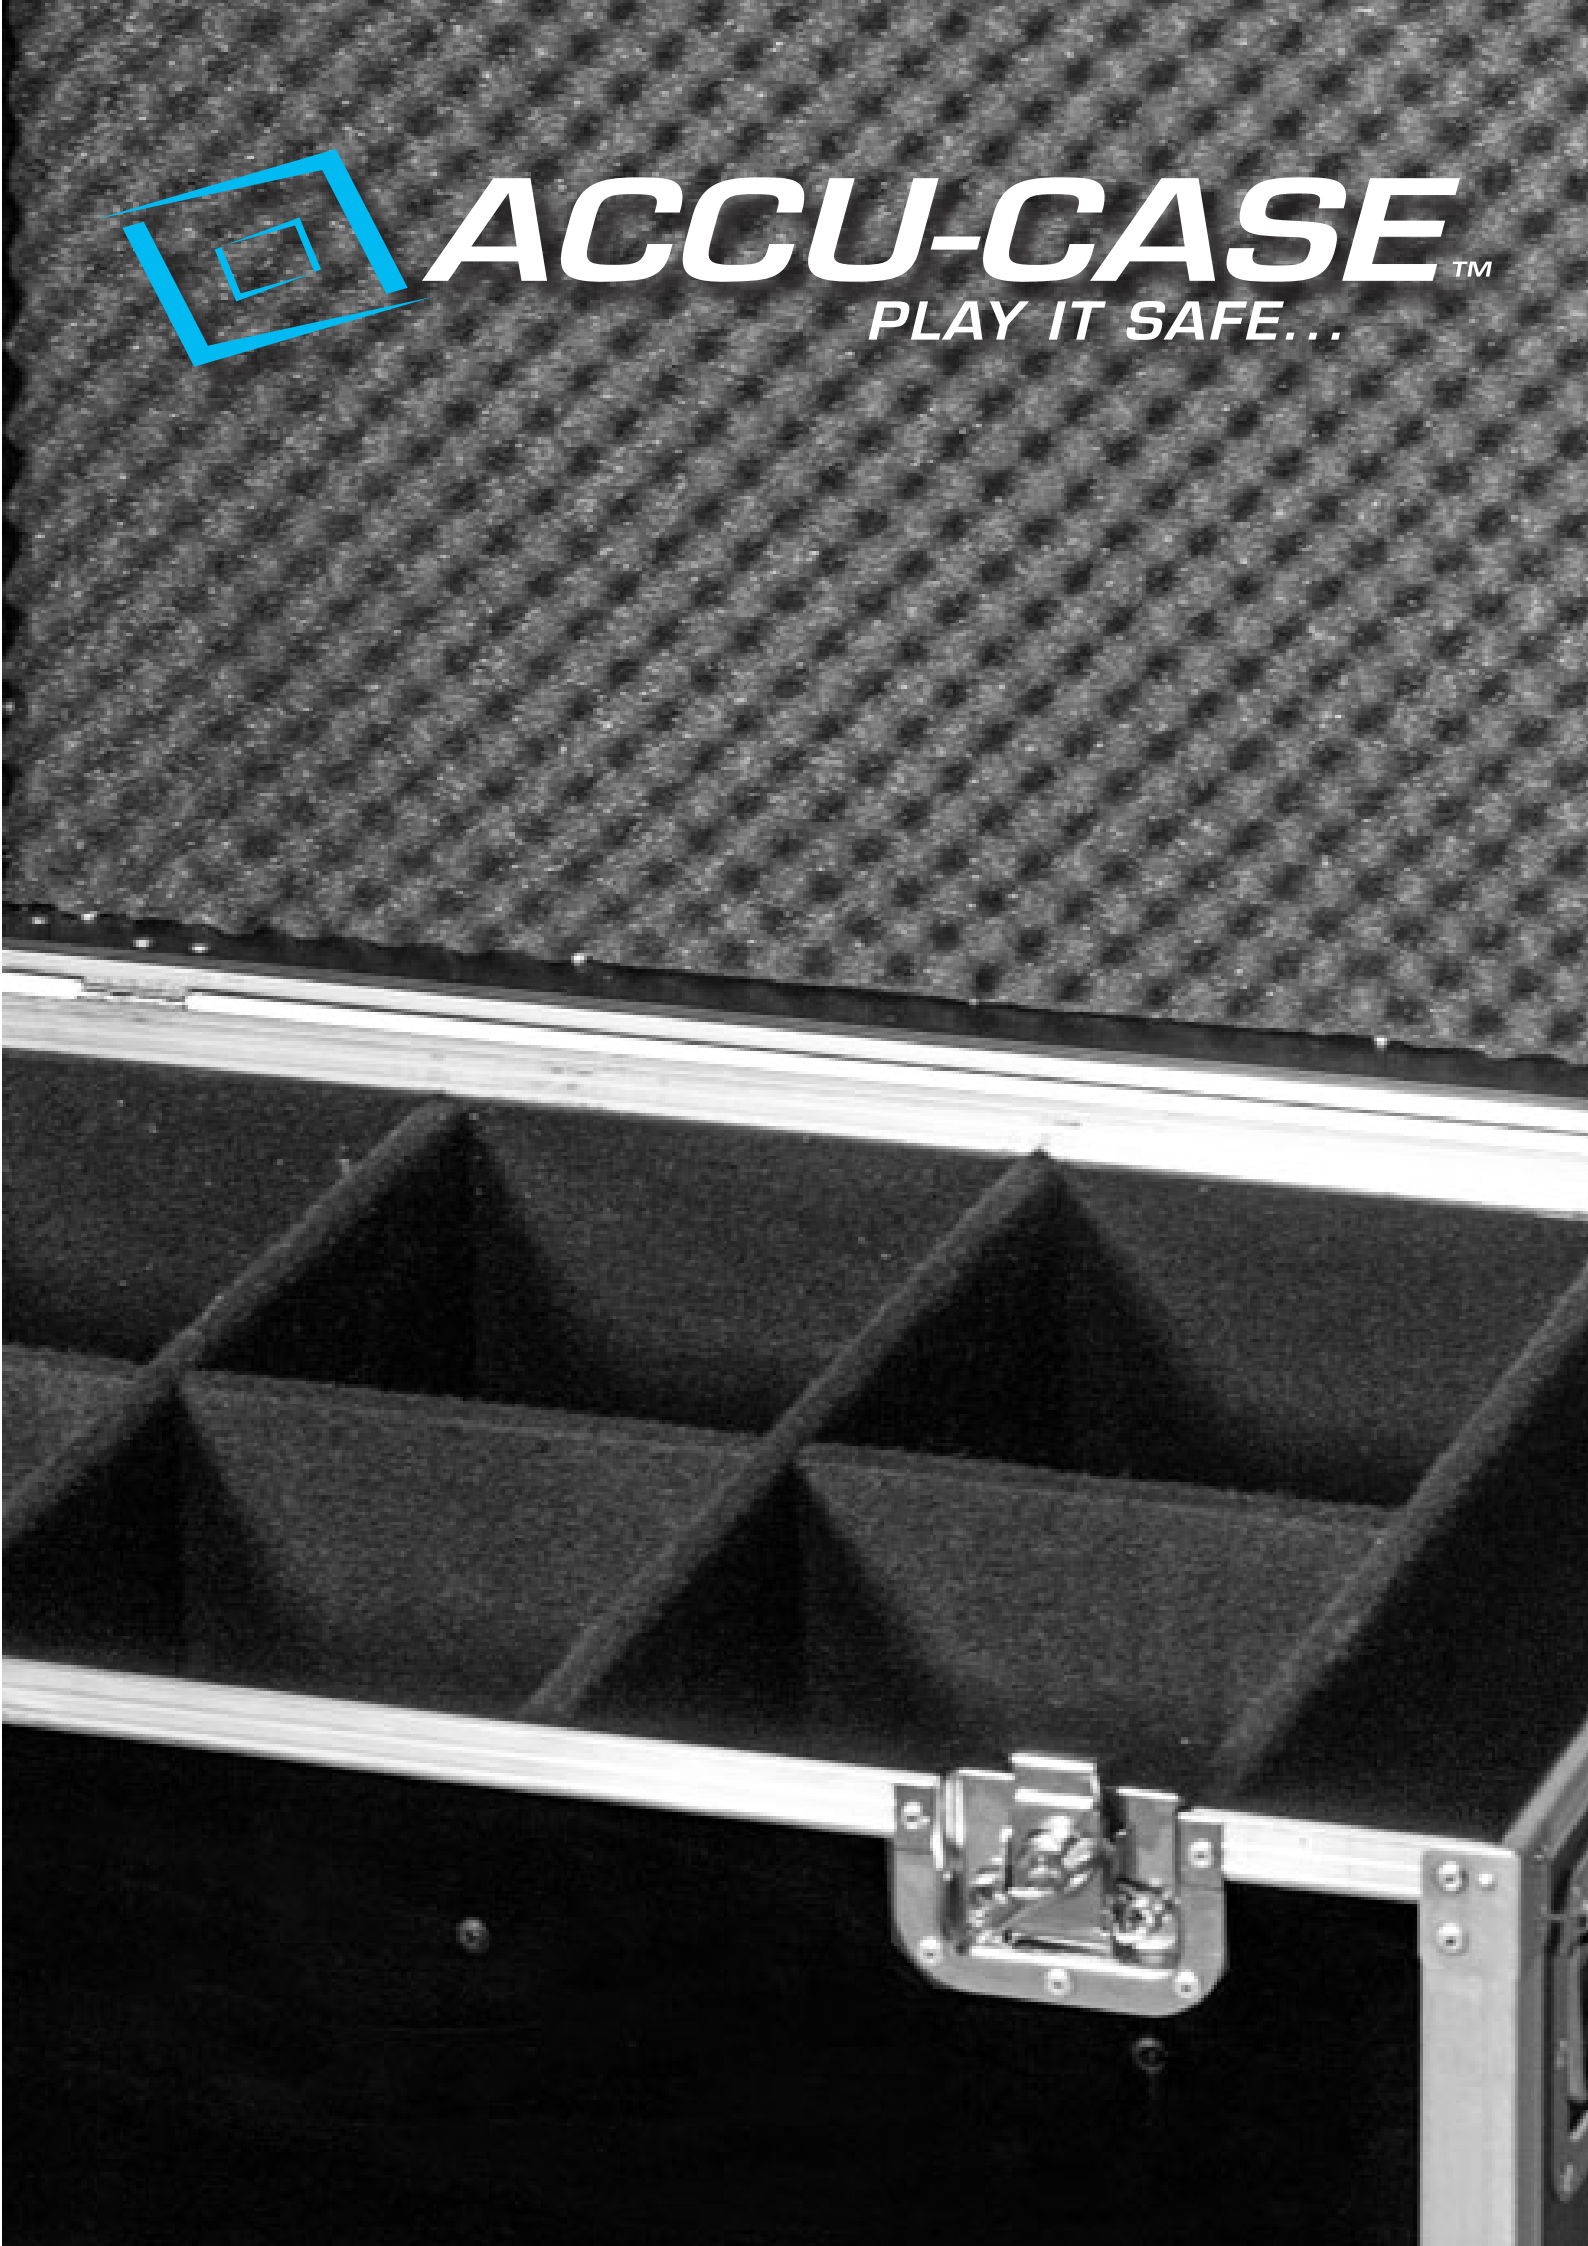

ADJ TOURING CASES

ADJ Touring Case 2x Vizi Beam 5RX
CODE: 1521000253

ADJ Touring Case 2x Vizi Hybrid 16RX
CODE: 1521000285

ADJ Touring Case 2x Vizi BSW 300
CODE: 1521000309

ADJ Touring Case 4x Vizi Hex/QWash7
CODE: 1521000311

ADJ Touring Case 4x Focus Spot Three Z
CODE: 1521000284

ADJ Touring Case 4x Inno Color Beam Z19
CODE: 1521000221

ADJ Touring Case 4x Vizi Beam RXONE
CODE: 1521000283

ADJ Touring Case 6x 7PZ IP
CODE: 1521000310

ADJ Touring Case 8xAV6X
CODE: 1521000306

ADJ Touring Case 8x AV3/AV4
CODE: 1521000305

ADJ Touring Case 2 x Vizi Wash Pro
CODE: 1521000341

ADJ Touring Case 2 x Vizi CMY 300
CODE: 1521000340

ADJ TOURING CASE 6X LED PAR UNIVERSAL

Universal Touring case for 6 PARs.

Bluewheels sold separately

Compartment dimensions (WxLxH):
200mmx260mmx300mm

Compatible with :

- WiFly QA5 IP
- WiFly EXR QA5 IP
- Wifly EXR HEX5 IP
- Lightning COB Cannon
- UV COB Cannon
- Dotz PAR100
- WiFly EXR Dotz PAR (without Snoot)

CODE: 1521000254



ADJ TOURING/CHARGING CASE 6X ELEMENT PAR

- Compatible with Element QA IP, Element HEX IP, Element QA & Element HEX
- Dustproof sideways chassis Power-Con Input (3m)
- PowerCON Cable included
- Built in IEC charging station
- 6 x IEC male/female charging cables 50cm included
- 4 wheels (2 with brakes)
- Castor dishes on top for stacking
- 4 handles
- Dimensions (L x W x H): 798 x 600 x 294mm (without wheels)

CODE: 1521000327



ACF-SW/CONUS CASE

High quality universal cone and adapter case with 9mm wall thickness and 2 inlays.

Specifications

- Separate storage compartment for tools
- 2 butterfly locks on the front
- 3 hinged case handles
- 2 inlays: 1x for 24x cone and 48 pins, 1x for 96 pins
- Material: 9mm plywood
- Massive steel ball corners
- Weight: 11,8 Kg
- Dimensions: 567x273x32mm

CODE: 1521000033



ACA-SW/CONUS/PIN INLAY FOR CONUS CASE

Specifications

- High quality universal /Conus/Pin Inlay for Conus Case
- 1 Inlay for 48x pin and 24x Conus
- Material: 9mm plywood

CODE: 1521000040

ACA-SW/PIN INLAY FOR CONUS CASE

Specifications

- High quality universal Conus Inlay for Conus Case
- 1 Inlay for 96 pins
- Material: 9mm plywood

CODE: 1521000041



ACF-SW/SCENESETTER 24 CASE

Protect your controller and transport it only with case.

Specifications

- Solid 7 mm thick plywood
- Strong aluminium profiles

CODE: 1521000071



ACF-SW/DMX OPERATOR

This durable roadcase is specially made for lighting controllers.

It has aluminium profiles and ball corners to protect the unit.

It fits f.e. DMX OPERATOR I , DMX Operator 384 & Wifly WLC-16

Specifications

- Solid 9 mm plywood
- Butterflylocks
- Color: black

CODE: 1521000070



ACF-SW/VMS ROAD

The VMS Road-Case is designed to protect the AMERICAN AUDIO VMS4.1 and VMS4.I. It offers an additional Laptop board as well as front and rear openings for easy cabling and access to the VMS's front controls.

Specifications

- Heavy duty roadcase for VMS Series Midi-consoles
- Removable lid
- Laptop board
- Aluminium profile
- Foam coverage to protect the unit from scratches
- Metal ball corners
- Heavy handle
- Butterfly lock
- Rear opening for cabling
- Front opening to access the control knobs of
- Good air circulation



KG	L
10.8	564 mm
	W
	425 mm
	H
	245 mm

CODE: 1521000127

Equipment sold separately.

ACF-SW/DDR

Professional Doubledoor-rack for audio and light equipment.

Specifications

- 7 mm strong wood
- Ball corners
- Butterfly latches (DDR4)
- Handles for transport
- Rubber feet
- Rails & Screws included - Mounting Depth: 44,3cm



KG	L
5.9	600 mm
	W
	506 mm
	H
	115 mm

1521000006

ACF-SW / DDR2

KG	L
7.4	600 mm
	W
	506 mm
	H
	160 mm

1521000007

ACF-SW / DDR3

KG	L
8.6	600 mm
	W
	506 mm
	H
	202 mm

1521000010

ACF-SW / DDR4

ACF-PW/ROAD CASE


Professional road case to protect your equipment and tools.

The ROAD CASE series is made from extra strong 9mm plywood.

Different sizes available.

Specifications

- Foam coverage inside to protect equipment
- Solid 9mm plywood
- Strong aluminum profile
- Steel ball corners
- Strong handles on 2 sides
- Rubber feet

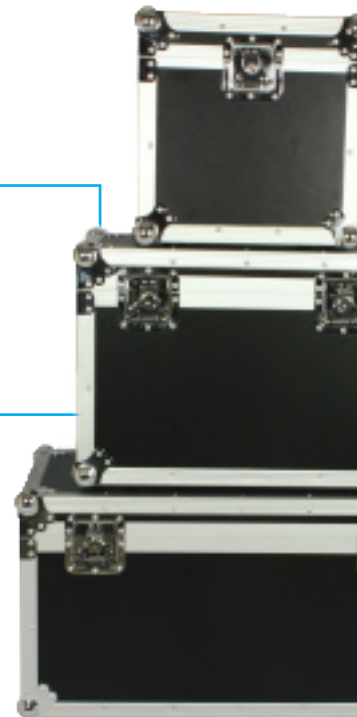

KG	L
6.2	283 mm
	W
	382 mm
	H
	383 mm

1531000012

ACF-PW / Road Case S:

inner dimensions: 360 x 360 x 260 mm

KG	L
11.5	381 mm
	W
	581 mm
	H
	410 mm

1531000013

ACF-PW / Road Case M:

Inner dimensions: 550 x 350 x 390 mm

KG	L
13.7	382 mm
	W
	780 mm
	H
	410 mm

1531000014

ACF-PW / Road Case L:

Inner dimensions: 750 x 350 x 390 mm

ACF-SA/TRANSPORT CASE

The aluminium transport cases from Accu Case are the perfect solution for all your transport needs when on the road. They offer safe transport and cover your equipment from dust and damage. There's a carrying handle on both sides.

Specifications

- Aluminium case
- Color: Aluminium
- Available sizes: S, M, L, XL, XXL



KG	L	317 mm
3.6	W	459 mm
	H	263 mm

I52200002 ACF-SA/Transport Case S



KG	L	376 mm
3.7	W	569 mm
	H	363 mm

I52200003 ACF-SA/Transport Case M



KG	L	377 mm
3.9	W	570 mm
	H	369 mm

I52200004 ACF-SA/Transport Case L



KG	L	385 mm
4.4	W	585 mm
	H	270 mm

I52200005 ACF-SA/Transport Case XL



KG	L	455 mm
4.7	W	690 mm
	H	317 mm

I52200006 ACF-SA/Transport Case XXL

ACF-SW/AC ACCESSORY CASE

Specifications

- 2 catches and 1 Handle
- Steel Ball corners and aluminium profiles
- Top is completely foamed
- 3 layers of pre-cut foam (1 x 1 cm) to peel off included
- Dimensions inside: Length 560mm x Width 280mm x Height (w/o top) 100mm

Set of extra 3 foam inlays optional available

CODE: 1521000014



Equipment sold separately.



ACM/FOAM INLAY AC-OI

ACCESSORY CASE (3PC)

L 560 X W 280 X H 100

3pc = 1 Set

pre-cut

CODE: 1554000001



ACF-SW/ AC MINI ACCESSORY CASE

The Mini Accessory Flight case from Accu Case enables you to transport all the little stuff that normally gets lost during being on the road. It offers safe transport, protects your materials from dust and damage. There's a carrying handle on the front.

Specifications

- Strong aluminium profiles
- Foam coverage inside to protect equipment
- Color: silver

CODE: 1521000103



ACF-SW/AC M ACCESSORY CASE

The AC M Accessory flight case from Accu Case is a universal toolcase for divers accessories. It offers safe transport, covers your equipment from dust and damage. The inside is completely filled with pre-cut foam, which enables you to make perfect fittings for your stuff. There's a carrying handle on the front and 2 lockable locks.

Specifications

- Solid 7 mm thick plywood
- Strong aluminium profiles
- Steel ball corners
- Foam coverage inside to protect equipment
- Rubber feet
- Color: black

CODE: 1521000107



ACF-SW/AC XXL ACCESSORY CASE

The AC XXL Accessory flight case from Accu Case is a universal toolcase for divers accessories. It offers safe transport, covers your equipment from dust and damage. The inside is completely filled with pre-cut foam, which enables you to make perfect fittings for your stuff. There's a carrying handle on the front and 2 butterfly locks.

Specifications

- Solid 7 mm thick plywood
- Strong aluminium profile
- Steel ball corners
- Foam coverage inside to protect equipment
- Rubber feet
- Color: black
- Inner dimensions: L578 x W 480 x H 207 mm

CODE: 1521000046

KG	L	637 mm
4.5	W	550 mm
	H	260 mm




ACF-SW/PROTEK TT PRO CASE BLACK

Specifications

- Heavy duty turntable hardcase with sturdy brackets and ball corners
- Fits one American Audio or other popular turntable brands
- Black surface
- Sturdy aluminum frame
- Foam inlay
- Transport handles
- Removable lid
- Butterfly locks
- Equipment not included

CODE: 1521000022

KG	L	420 mm
7.2	W	528 mm
	H	230 mm

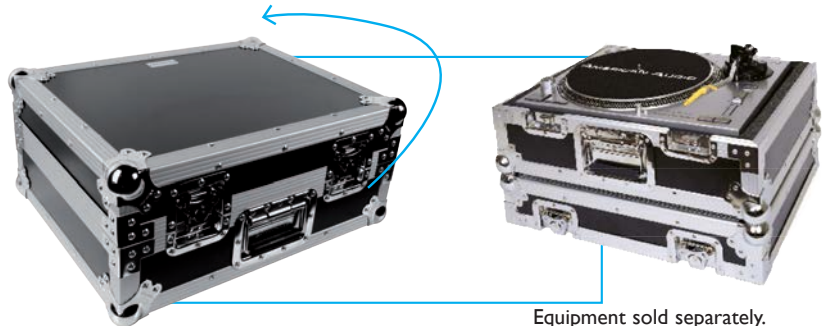

Equipment sold separately.

ACF-SW/MICROPHONE CASE

This microphone road case is made for 12 dynamic microphones and accessories. Protect your equipment during transport and storage. The case is fitted with foam and has a butterfly lock. A handle is on top of the case. The case is available in metallic black aluminium finish.

CODE: 1521000023

KG	L	204 mm
2.8	W	388 mm
	H	258 mm



ACF-SW/CD CASE PRO

Specifications

- Durable road case for up to 108 CDs
- Butterfly latches
- Handle for easy transport
- Ball corners
- Strong aluminum profile
- Extra strong construction for road use

CODE: 1511000001

KG	L 321 mm
6.5	W 593 mm
	H 188 mm



CDs not included

ACF-SW/TOOLBOX

The Toolbox flight case from Accu Case is a universal tool box.

It offers safe transport, covers your working tools from dust and damage. There's a carrying handle on the front together with 2 lockable butterfly-locks.

Specifications

- Solid 7 mm thick plywood
- Strong aluminium profiles
- Steel ball corners
- Butterfly locks
- Rubber feet
- Color: black

CODE: 1521000079



KG	L 340 mm
4.0	W 480 mm
	H 180 mm



ACA/WHEEL BOARD

Heavy duty wheel board

Specifications

- 20 mm MDF Wood
- Black coated
- 100 mm Blue Wheels, two with brakes
- Cut out for handle - Corners with 45° cutoff
- Color: black

CODE: 1531000002

KG	L 670 mm
9.35	W 540 mm
	H 175 mm



ACA/CASE CART

An easily foldable and portable Luggage Cart

Specifications

- Wheels automatically swing out and fold up for easy storage.
- Extra sturdy and lightweight, extremely portable.
- Extends to a height of 101,7cm
- Smooth rolling 10cm diameter wheels
- Loading capacity: 54.5 kg

CODE: 1553000012



Softbags

Now there's an easy way for DJs and VJs to protect their lighting gear without breaking their budgets. Designed specifically for the mobile lighting market by a team with decades of experience in the industry, the case line covers a wide range of gear, from small lasers to centerpiece effects. The stylish black cases, work with lighting gear from all major suppliers.

Made of durable synthetic material the soft, padded cases protect a DJ's investment in lighting by safeguarding fixtures against nicks, dings and scratches. This not only preserves the outward appearance of lighting effects, it also extends their useful life.

Secure „view windows“ on nearly all cases make it easy to identify specific fixtures even after they've been packed. The cases' extra wide mouth design allows gear to be removed quickly and easily. Another convenient feature found in most cases is the secured zipped pocket for storing extra lamps, clamps and other accessories.

The cases offer an added benefit for performers on the go by allowing gear to be stacked without having to be boxed. This saves valuable transport space in cars and vans.



KG	L	420 mm
0.66	W	240 mm
	H	230 mm



F4 PAR BAG

Soft padded transport bag for modern LED Flat Pars.

The Flat Pak Bag 4 is a soft padded transport bag for all modern Flat Pars. It offers you a convenient transport possibility for your equipment without wasting space in your car. It fits up to 4 Flat Pars.

Another big benefit of the Flat Pak Bag is the storage during your gig. Don't pay for storage of bulky wooden flight cases or fill your tiny DJ booth. Just fold it together and store it.

The bag is made from durable synthetics which makes it dirt-repellent and lightweight. In the additional side bag you can store cables and adapters as well.

CODE: 1521000190

KG	L	830 mm
1.24	W	240 mm
	H	230 mm



F8 PAR BAG

Soft padded transport bag for modern LED Flat Pars.

The Flat Pak Bag 8 is a soft padded transport bag for all modern Flat Pars. It offers you a convenient transport possibility for your equipment without wasting space in your car. It fits up to 8 Flat Pars.

Another big benefit of the Flat Pak Bag is the storage during your gig. Don't pay for storage of bulky wooden flight cases or fill your tiny DJ booth. Just fold it together and store it.

The bag is made from durable synthetics which makes it dirt-repellent and lightweight. In the additional side bag you can store cables and adapters as well.

CODE: 1521000191



WiFLY TOUGH BAG

Specifications

- Durable semi-hard case for transporting of lighting fixtures
- Fits four (4) ADJ WiFLY Pars and one (1) ADJ WiFLY NEI or WiFLY RGBW8C
- Wheels & pull handle
- Custom fix interior protects lighting fixtures during transport and storage
- Great for rentals companies and mobile lighting designers and entertainers on the go
- Outer Case Dimensions: 26.5" x 25" x 13"/673x635x330mm
- Inner Case Dimensions: 24" x 23.25" x 11.25"/610x590x286
- Compartment Dimensions: 8.5" x 11" x 11"/216 x 279 x 279mm
- Weight: 23 lbs. / 10.5 kg.

CODE: 1521000278



TOUGH BAG ISPX4

Specifications

- Durable semi-hard case for transporting of lighting fixtures
- Fits 4 of the following: Inno Pocket Spot, Inno Pocket Spot Pearl & Inno Pocket Z4
- Wheels & pull handle
- 5 compartments: 4 for lighting fixtures, 1 for cables
- Custom fix interior protects lighting fixtures during transport and storage
- Great for rentals companies and mobile lighting designers and entertainers on the go
- Dimensions (LxVxH): 1000x260x320mm
- Weight: 15 lbs / 6.8 kg. (no fixtures inside)

CODE: 1521000255



CODE: 6011000019

L 230 mm
W 230 mm
H 310 mm

ASC-AC-115

Mini Moving Head Style Case

- Affordable padded soft cases designed to protect and extend the life of mobile lighting fixtures
- Great for mobile DJs, Karaoke rigs and working bands
- Saves valuable transport space by allowing fixtures to be stacked without having to be boxed

Works With All Brands of Lighting Fixtures!



CODE: 6011000021

L 330 mm
W 330 mm
H 300 mm

ASC-AC-125

Effect Lighting Case

- Saves valuable transport space by allowing fixtures to be stacked without having to be boxed
- Extra wide mouth design allows gear to be removed quickly and easily

Works With All Brands of Lighting Fixtures!



CODE: 6011000020

L 460 mm
W 220 mm
H 220 mm

ASC-AC-120

Fogger / Intelligent Scanner Style Case

- Affordable padded soft cases designed to protect and extend the life of mobile lighting fixtures
- Great for mobile DJs, Karaoke rigs and working bands
- Saves valuable transport space by allowing fixtures to be stacked without having to be boxed

Works With All Brands of Lighting Fixtures!



CODE: 6011000051

L 355 mm
W 205 mm
H 200 mm

ASC-AC-126

The ASC-126 is primarily designed to protect several of the American DJ effect products, such as: Bubbletron, H2O DMR IR, UV LED BAR 20, VF400. The ASC-126 fits other lighting products and brands as well; make sure to check the dimensions of your product to see if it fits this case.

- Great for mobile DJs, Karaoke rigs and working bands
- Saves valuable transport space by allowing fixtures to be stacked without having to be boxed
- Extra wide mouth design allows gear to be removed quickly and easily

Works With All Brands of Lighting Fixtures!



CODE: 6011000054

L 530 mm
W 330 mm
H 215 mm

ASC-AC-131

Medium Sized Scanner Case

- Works with all brands of lighting fixtures
- Affordable padded soft cases designed to protect and extend the life of mobile lighting fixtures
- Great for mobile DJs, Karaoke rigs and working bands
- Extra's for storing extra Lamps, Clamps, Cables and other Accessories
- Saves valuable transport space by allowing fixtures to be stacked without having to be boxed
- Secure „view windows“ on Arriba Cases make it easy to identify specific fixtures even after they've been packed, or place your business card in the window for personal identification
- Extra wide mouth design allows gear to be removed quickly and easily.

Works With All Brands of Lighting Fixtures!



CODE: 6011000022

L 310 mm
W 320 mm
H 190 mm

ASC-AC-130

Small Effect Lighting Case

- Secured zipped pocket for storing extra lamps, clamps, cables and other accessories
- Saves valuable transport space by allowing fixtures to be stacked without having to be boxed

Works With All Brands of Lighting Fixtures!

Works With
All Brands of
Lighting Fixtures!

CODE: 6011000023



L 480 mm
W 250 mm
H 180 mm

ASC-AC-135

Small Scanner Case

- Affordable padded soft cases designed to protect and extend the life of mobile lighting fixtures
- Great for mobile DJs, Karaoke rigs and working bands
- Saves valuable transport space by allowing fixtures to be stacked without having to be boxed



CODE: 6011000027

L 470 mm
W 410 mm
H 270 mm

ASC-AC-145

Four Way Large Par Case

Mid-Size Intelligent ScannerSoftCase

- Saves valuable transport space by allowing fixtures to be staked without having to be boxed
- Extra wide mouth design allows gear to be removed quickly and easily

Works With
All Brands of
Lighting Fixtures!



CODE: 6011000024

L 580 mm
W 250 mm
H 250 mm

ASC-AC-140

Large Scanner Style Case

- Affordable padded soft cases designed to protect and extend the life of mobile lighting fixtures
- Secured zipped pocket for storing extra lamps, clamps, cables and other accessories

Works With
All Brands of
Lighting Fixtures!



CODE: 6011000039

L 1336 mm
W 171 mm
H 121 mm

ASC-AC-210

Works With All Brands Of LED Bar Fixtures

- Protects ADJ UB 9H, UB 12H, Mega Tri Bar & Ultra Kling Bar
- Padded soft case designed to protect and extend the life of mobile lighting fixtures
- Designed for 2x 1m Linear fixtures or 4x 0.5m Linear fixtures

L 620 mm
W 330 mm
H 340 mm

CODE: 6011000025



ASC-AC-142

Medium Style Prop & Gear Case

- Saves valuable transport space by allowing fixtures to be stacked without having to be boxed
- Secure „view windows“ on Arriba Cases make it easy to identify specific fixtures even after they've been packed, or place your business card in the window for personal identification

Works With
All Brands of
Lighting Fixtures!



CODE: 6011000026

L 762 mm
W 356 mm
H 356 mm

ASC-AC-144

Large Style Prop & Gear Case

- Affordable padded soft cases designed to protect and extend the life of mobile lighting fixtures
- Great for mobile DJs, Karaoke rigs and working bands
- Secured zipped pocket for storing extra lamps, clamps, cables and other accessories

Works With
All Brands of
Lighting Fixtures!



CODE: 6011000036

L 1664 mm
W 394 mm
H 394 mm

ASC-AC-185

Rolling Case For Truss

Protects These Lighting Models:
Dura Truss System & Other Truss Brands



CODE: 6011000053

L 1600 mm
W 225 mm
H 150 mm

ASC-AC-63

The AC-63 is primarily designed to protect two lighting tripod stands from American DJ (such as the LTS-6, LTS Color, Color Stand LED & LSS-3S). They may fit other lighting tripods and brands as well; make sure to check the dimensions of your product to see if it fits this case.

- Great for mobile DJs, Karaoke rigs and working bands
- Saves valuable transport space by allowing fixtures to be stacked without having to be boxed
- Extra wide mouth design allows gear to be removed quickly and easily

Works With
All Brands of
Lighting Fixtures!



CODE: 6011000031

L 381 mm
W 356 mm
H 457 mm

ASC-AC-160

Starball / Centerpiece Style Case

- Affordable padded soft cases designed to protect and extend the life of mobile lighting fixtures
- Great for mobile DJs, Karaoke rigs and working bands
- Saves valuable transport space by allowing fixtures to be stacked without having to be boxed

Works With
All Brands of
Lighting Fixtures!

L 495 mm
W 350 mm
H 50 mm


CODE: 6011000050

ASC-AS-190

The ASC-AS-190 fits American Audio VMS5.

Specification

- Protective soft bag for Midi Controllers + 1 Laptop
- Extra pads inside to fit a variety of Midi Controllers
- Extra compartment for one 17-inch laptop
- Pocket to store extra cables and power adapters
- Shoulder strap
- Extra strap to fit on a rolling bag
- Case inside dimensions (LxVxH): 495x350x50mm

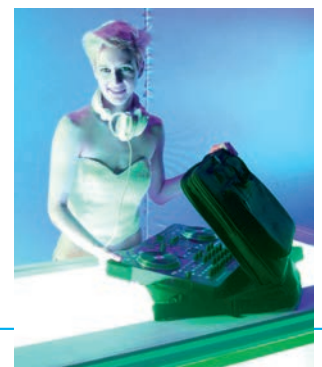

The ATP & ACR Series are part of the Stackable Rolling Series; multi purpose padded bag for the entertainer on the go. Each bag is made of heavy duty materials to survive life on the road. The large inner dimensions along with it's configurable padded dividers allow for a wide variety of lighting, audio equipment, cables, extension cords, microphones and all types of electronic equipment to be stored and transported. The Stackable Rolling Series helps you protect your valuable investment, allows for easier transport to and from events, and keep gear dust free when your not using it.



CODE: 6011000046

ASC-ACR22



CODE: 6011000049

ASC-ATP22

Bottom Roller Case

- May be used together with the ATP-Series (sold separately) by use of it's rear strap
- Includes two configurable padded dividers
- Heavy duty design and zippers
- 1/2 inch padding

*Works With
All Brands of
Lighting Fixtures!*

Top Stackable Case

- Fits onto the ACR-Series rolling bag (sold separately) by use of it's rear strap
- Includes two configurable padded dividers
- Heavy duty design and zippers
- 1/2 inch padding

*Works With
All Brands of
Lighting Fixtures!*



ACCU-CABLE™

EXTEND YOUR WORLD...



Speaker cable on Roll 2x 0,75mm² / flat

AC-SC2-0,75/100R



Speaker cable on Roll
Conductors: 2
Ø: 2x 0,75mm²
Construction: flat
Length: 100m



Available Colors:

100m AC-SC2-0,75/100R code: 1612100001 transparent

Speaker cable on Roll 4x 2,5mm² / round

AC-SC4-2,5/100R

Speaker cable on Roll
Conductors: 4
Ø: 4x 2,5mm²
Construction: round
Length: 100m



Available Colors:

100m AC-SC4-2,5/100R code: 1612100011 black

SPEAKER CABLE ON ROLL - 100m

Speaker cable on Roll 2x 2,5mm² / round

AC-SC2-2,5/100R-B

Speaker cable on Roll
Conductors: 2
Ø: 2x 2,5mm²
Construction: round
Length: 100m



Available Colors:

100m AC-SC2-2,5/100R-B code: 1612100010 black

Speaker cable on Roll 2x 1,5mm² / flat

AC-SC2-1,5/100R



Speaker cable on Roll
Conductors: 2
Ø: 2x 1,5mm²
Construction: flat
Length: 100m



Available Colors:

100m AC-SC2-1,5/100R code: 1612100002 transparent

Speaker cable on Roll 2x 2,5mm² / flat

AC-SC2-2,5/100R

Speaker cable on Roll
Conductors: 2
Ø: 2x 2,5mm²
Construction: flat
Length: 100m



Available Colors:

100m AC-SC2-2,5/100R code: 1612100003 transparent

Speaker cable on Roll 2x 4mm² / flat

AC-SC2-4/100R



Speaker cable on Roll
Conductors: 2
Ø: 2x 4mm²
Construction: flat
Length: 100m



Available Colors:

100m AC-SC2-4/100R code: 1612100004 transparent

MICROPHONE CABLE ON ROLL - 100m

Microphone Cable on Roll / round

AC-MC/100R



Conductors: 3
Length: 100m

Available Colors:

100m AC-MC/100R-B code: 1612100005 black
100m AC-MC/100R-G code: 1612100006 green
100m AC-MC3/100R-R code: 1612100007 red
100m AC-MC3/100R-BL code: 1612100009 blue




2x XLR female - 2x 6,3 Jack male

AC-2XF-2J6M/3



Connector side A: 2x XLR (F) /3-pin
Connector side B: 2x Jack 6,3 mono



Available lengths:

- 1,5m AC-2XF-2J6M/1,5 code: 1611000039
- 3m AC-2XF-2J6M/3 code: 1611000027




6,3 Jack stereo - 2x Jack mono

AC-J6S-2J6M



Connector side A: 2x 6,3 Jack male
Connector side B: 6,3 Jack stereo



Available lengths:

- 3m AC-J6S-2J6M/3 code: 1611000028



2x XLR male - 3,5 jack stereo male

AC-J3S-2XM



Connector side A: 2x XLR (m) /3-pin
Connector side B: 1x 3,5 Jack stereo



Available lengths:

- 1,5m AC-J3S-2XM/1,5 code: 1611000042
- 3m AC-J3S-2XM/3 code: 1611000043



2x RCA male - 3,5 jack stereo male

AC-J3S-2RM



Connector side A: 2x RCA (m)
Connector side B: 1x 3,5 Jack stereo



Available lengths:

- 1,5m AC-J3S-2RM/1,5 code: 1611000040
- 3m AC-J3S-2RM/3 code: 1611000041



2x 6,3 Jack - 3,5 jack stereo male

AC-J3S-2J6M



Connector side A: 2x 6,3 Jack male
Connector side B: 1x 3,5 Jack stereo



Available lengths:

- 1,5m AC-J3S-2J6M/1,5 code: 1611000044




2x 6,3 Jack male - 2x RCA male

AC-2R-2J6M



Connector side A: 2x 6,3 Jack male
Connector side B: 2x RCA (m)



Available lengths:

- 1,5m AC-2R-2J6M/1,5 code: 1611000049
- 3m AC-2R-2J6M/3 code: 1611000007



MAIN POWER CORE & POWER ADAPTER

IEC extension Cable

IEC extension cable 2m male/female

Type:

- 2 m AC-IEEXT-1/2 code: 1631000004



UK main cord / IEC

UK main cord mal / IEC female
10A 3x1mm²

Type:

- 1,5m AC-UK-IEC-1/1,5 code: 1631000005



UK main cord / S8 (Euro)

UK main cord mal / S8 female
10A 2x1mm²

Type:

- 1,5m AC-UK-S8-1/1,5 code: 1631000003



AC-UKA/SCHUKO SCHUKO/UK Converter Plug

Converter Plug

code: 1632200002

AC-UKA/EURO EURO/UK Converter Plug CP1B

Converter Plug

code: 1632200001



POWER CABLES

PowerCON Link

PLC PowerCON link 0,5m STR	1621000100
PLC PowerCON link 1,0m STR	1621000101
PLC PowerCON link 3,0m STR	1621000102
PLC PowerCON link 5,0m STR	1621000103
PLC PowerCON link 10,0m STR	1621000104
PLC PowerCON link, 15,0m STR	1621000105
PLC PowerCON link 30,0m STR	1621000106



True 1

MPC True1 - Schuko 2m	1621000113
MPC True1 - Schuko 5m	1621000114
MPC True1 - Schuko 10m	1621000115
MPC True1 - UK 2m	1621000116
MPC True1 - UK 5m	1621000117
MPC True1 - UK 10m	1621000118
TRU1PCOA	1621000099
TRU1PCIA	1621000098



PowerCON Shuko

MPC PowerCON - Schuko 2m	1621000107
MPC PowerCON - Schuko 5m	1621000108
MPC PowerCON - Schuko 10m	1621000109
MPC PowerCON - UK 2m	1621000110
MPC PowerCON - UK 5m	1621000111
MPC PowerCON - UK 10m	1621000112



SAC3

SAC3FCA PowerCON in STR	1621000119
SAC3FCB PowerCON out STR	1621000120
SAC3FX True in STR	1621000121
SAC3MX True out STR	1621000122
SAC3MPA PowerCON in STR	1621000123
SAC3MPB PowerCON out STR	1621000124

Multicore on Cable Drum XLR - XLR

AC-MCR



Yellow plastic cable drum with braided nylon to protect the cables. Rotation lock, built in flange.

- 8 Channel, number coded, 15m XLR
- Multicore cable drum
- Cable diameter: 1 cm
- XLR metal connectors
- Weight: 5,5 Kg

Connector side: 8x XLR male
Stage Box side: 8x XLR female
15 m AC-MCR8/15 167000001



Speaker Cables Speaker - Speaker

AC-SP2-2,5



2x 2,5mm²

Connector side A: Speaker 2-pin
Connector side B: Speaker 2-pin

Available lengths:

- 5 m AC-SP2-2,5/5 code: 1611000023
- 10 m AC-SP2-2,5/10 code: 1611000024
- 15 m AC-SP2-2,5/15 code: 1611000025
- 20 m AC-SP2-2,5/20 code: 1611000026



6,3 Jack stereo - 6,3 Jack stereo Cables

AC-J6S



Connector side A: Jack 6,3 stereo
Connector side B: Jack 6,3 stereo

Available lengths:

- 1,5 m AC-J6S/1,5 1611000017
- 5 m AC-J6S/5 1611000018
- 10 m AC-J6S/10 1611000019



2x XLR male - 2x RCA male


AC-2XM-2RM



Connector side A: 2x XLR (m) /3-pin
Connector side B: 2x RCA (m)

Available lengths:

- 1,5 m AC-2XM-2RM/1,5 1611000029
- 3 m AC-2XM-2RM/3 1611000034
- 5 m AC-2XM-2RM/5 1611000035



2x XLR male - 2x 6,3 Jack male

AC-2XM-2J6M



Connector side A: 2x XLR (m) /3-pin
Connector side B: 2x Jack 6,3 mono

Available lengths:

- 1,5 m AC-2XM-2J6M/1,5 1611000036
- 3 m AC-2XM-2J6M/3 1611000037
- 5 m AC-2XM-2J6M/5 1611000038



RCA Cables

AC-R



Connector side A: RCA
Connector side B: RCA

Available lengths:

- 0,5 m AC-R/0,5 1611000020
- 1 m AC-R/1 1611000021
- 3 m AC-R/3 1611000022



2x XLR male - 2x 6,3 Jack male stereo

AC-2J6S-2XM/3



Connector side A: 2x XLR (m) /3-pin
Connector side B: 2x Jack 6,3 stereo

Available lengths:

- 3 m AC-2J6S-2XM/3 1611000033



2x XLR female - 2x RCA male


AC-2XF-2RM



Connector side A: 2x XLR (f) /3-pin
Connector side B: 2x RCA (m)

Available lengths:

- 1,5 m AC-2XF-2R/1,5 1611000030



Microphone cable XLR/XLR

AC-XXMF



Connector side A: XLR (m) /3-pin

Connector side B: XLR (f) /3-pin

Available lengths:

1m	AC-XXMF/1	1611000008
3m	AC-XXMF/3	1611000013
5m	AC-XXMF/5	1611000010
10m	AC-XXMF/10	1611000011
15m	AC-XXMF/15	1611000009
20m	AC-XXMF/20	1611000012

Microphone cable XLR/XLR PRO ACCU CABLE

AC-PRO-XXMF



Connector side A: XLR (m) /3-pin

Connector side B: XLR (f) /3-pin

Available lengths:

0,5m	AC-PRO-XXMF/0,5	1611000064
1m	AC-PRO-XXMF/1	1611000065
3m	AC-PRO-XXMF/3	1611000066
5m	AC-PRO-XXMF/5	1611000067
10m	AC-PRO-XXMF/10	1611000068
15m	AC-PRO-XXMF/15	1611000069
20m	AC-PRO-XXMF/20	1611000070

XLR male - 6,3 Jack stereo Cables

AC-XM-J6S



Connector side A: XLR (m) /3-pin

Connector side B: Jack 6,3 stereo

Available lengths:

1,5m	AC-XM-J6S/1,5	1611000047
3m	AC-XM-J6S/3	1611000048

SPECIAL CABLES

Power + XLR (Audio) Cable

AC-COM-A



Side A: 1x Schuko (m) + 1x XLR (f)
Side B: 1x IEC (f) + 1x XLR (f)

Available lengths:

10m	AC-COM-A/10	code: 1611000005
20m	AC-COM-A/20	code: 1611000006



Microphone cable XLR/XLR - 90° angle plug

AC-XXMF -90°



Connector side A: XLR (m) /90°/3-pin

Connector side B: XLR (f) /90° /3-pin

Available lengths:

1,5m	AC-XXMF/1,5-90 90°	1611000031
3m	AC-XXMF/3-90 90°	1611000032

XLR female - 6,3 Jack stereo Cables

AC-XF-J6S



Connector side A: XLR (f) /3-pin

Connector side B: Jack 6,3 stereo

Available lengths:

1,5m	AC-XF-J6S/1,5	1611000045
3m	AC-XF-J6S/3	1611000046

6,3 Jack mono - 6,3 Jack mono Cables

AC-J6M



Connector side A: Jack 6,3 mono

Connector side B: Jack 6,3 mono

Available lengths:

1,5m	AC-J6M/1,5	1611000014
5m	AC-J6M/5	1611000015
10m	AC-J6M/10	1611000016

3 Pin XLR + PowerCON Combo Link Cable

AC3PPCON



Side A: 1 PowerCON Blue + 1 x DMX 3P (F)
Side B: 1 PowerCON Grey + 1 x DMX 3P (M)

Available lengths:

3,6m	AC3PPCON12	1154000048
------	------------	------------



DMX - PREMADE CABLES

DMX cable XLR/XLR 3-pin

AC-DMX3



Connector side A: XLR (m) /3-pin
Connector side B: XLR (f) /3-pin

Available lengths:

0,5m AC-DMX3/0,5 1621000018
1,5m AC-DMX3/1,5 1621000007
3m AC-DMX3/3 1621000008
5m AC-DMX3/5 1621000020
10m AC-DMX3/10 1621000009
15m AC-DMX3/15 1621000010
30m AC-DMX3/30 1621000011



DMX cable XLR/XLR 5-pin

AC-DMX5



Connector side A: XLR (m) /5-pin
Connector side B: XLR (f) /5-pin

Available lengths:

1,5m AC-DMX5/1,5 1621000014
3,0m AC-DMX5/3 1621000015
5,0m AC-DMX5/5 1621000021
10m AC-DMX5/10 1621000023
15m AC-DMX5/15 1621000016
30m AC-DMX5/30 1621000017



DMX CABLE ON ROLL - 100m

DMX cable on Roll 3

AC-DMX3/100R



DMX cable on Roll

Conductors: 3
Impedance: 110 Ohm
Length: 100m

1622100001



DMX cable on Roll 5


AC-DMX5/100R



DMX cable on Roll

Conductors: 5
Impedance: 110 Ohm
Length: 100m

1622100002

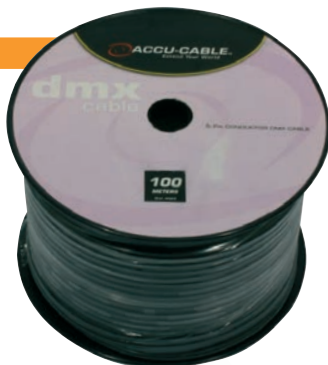

IP EXTENSION CABLES

IP Ext for Wifly EXR Bar IP

Available lengths:

2m Power IP ext. cable 2m code: 1226100314
5m Power IP ext. cable 5m code: 1226100316



DMX cable XLR/XLR 90° / 3-pin

AC-XMXF



Connector side A: XLR (m) /3-pin /90°
Connector side B: XLR (f) /3-pin / 90°

Available lengths:

1,5m AC-DMX3/1,5-90 code: 1621000022
3m AC-DMX3/3-90 code: 1621000019



DMX Adapter 3-pin (m) to 5-pin (f)

DMX Adapter 3-pin (male) to 5-pin (female)
5 cm

Available lengths:

5 cm AC-DMXT/3M5F 1621000012



DMX Adapter 3-pin (f) to 5-pin (m)

DMX Adapter 3-pin (female) to 5-pin (male)
5cm

Available lengths:

5 cm AC-DMXT/5M3F 1621000013



DMX Terminator XLR 3-pin (m)

DMX terminator XLR 3-pin, SET of 2



AC-DMXTERM-3/SET 1613000030 (392128)



DMX Terminator XLR 5-pin (m)

DMX terminator XLR 5-pin, SET of 2



AC-DMXTERM-5/SET 1613000031



Extension Cable LED Pixel Tube 360

Code: 1611000075 - 3 m
Code: 1611000076 - 5 m
Code: 1611000077 - 10 m



IP Ext for Wifly EXR HEX5/QA5 IP

Available lengths:

2m Power IP ext. cable 2m 1226100304
5m Power IP ext. cable 5m 1226100306
10m Power IP ext. cable 10m 1226100308



AUDIO ADAPTER

XLR male - Jack 6,3mm male mono

XLR 3-pin male - Jack 6,3mm male mono

Type:
AC-A-XM3/J6M 1613000004



XLR female - Jack 6,3mm female stereo

XLR 3-pin female - Jack 6,3mm female stereo

Type:
AC-A-XF3/J6S 1613000007



XLR female - XLR female

XLR 3-pin female - XLR 3-pin female

Type:
AC-A-XF3/XF3 1613000009



XLR male - RCA male

XLR male - RCA male

Type:
AC-A-XM3/RM 1613000011



XLR female - Jack 6,3mm male mono

XLR 3-pin female - Jack 6,3mm male mono

Type:
AC-A-XF3/J6M 1613000005



XLR male - Jack 6,3mm female stereo

XLR 3-pin male - Jack 6,3mm female stereo

Type:
AC-A-XM3/J6S 1613000006



XLR male - XLR 3-pin male

XLR 3-pin male - XLR 3-pin male

Type:
AC-A-XM3/XM3 1613000008



XLR female - RCA male

XLR 3-pin female - RCA male

Type:
AC-A-XF3/RM 1613000010



XLR female - RCA female

XLR 3-pin female - RCA female

Type:
AC-A-XF3/RF 1613000015



2x RCA female - Jack 6,3mm male stereo

2x RCA female - Jack 6,3mm male stereo

Type:
AC-A-RF/J6S 1613000013



RCA female - RCA female

RCA female - RCA female

Type:
AC-A-RF/RF 1613000014



Jack 6,3mm mono female - RCA Cinch male

Jack 6,3mm mono female - RCA Cinch male

Type:
AC-A-J6/RCA-M 1613000017



Coupler female - female for Speaker

Coupler female - female for Speaker 4-pin

AC-A-SPF4/SPF4 1613000003



XLR male - RCA female

XLR 3-pin male - RCA female

Type:
AC-A-XM3/RF 1613000016



RCA female - 6,3mm Jack male mono

RCA female - 6,3mm Jack male mono

Type:
AC-A-RF/J6M 1613000012



3,5 Jack female stereo - 6,3 Jack stereo male

3,5 Jack female stereo - 6,3 Jack stereo male

Type:
AC-A-J3/J6 3,5 1613000002



CABLE CONNECTORS

RCA male (SET of 2)

RCA Cinch plug male gold - SET

Type:
AC-C-RMG/SET 1613000028



XLR female 3-pin

XLR 3-pin female

Type:
AC-C-X3F 1613000018



Jack 6,3 mm /male / mono

Jack male 6,3mm mono

Type:
AC-C-J6M 1613000022



Jack 6,3 mm /female / stereo

Jack female 6,3mm stereo

Type:
AC-C-J6FS 1613000026



XLR - 90° / female 3-pin

90° XLR 3-pin female

Type:
AC-C-XF-90 1613000033



PANEL CONNECTORS

Speaker 4-pin panel / female

Speaker 4-pin panel / female

Type:
AC-C-PS4M 1613000025



XLR 3-pin panel metal/ female

XLR 3pin female panel metal

Type:
AC-C-XF3 1613000020



Jack 6,3 stereo panel / female

Jack 6,3 stereo panel / female

Type:
AC-C-PJ6S 1613000027



XLR 3-pin panel metal /male

XLR 3pin male panel metal

Type:
AC-C-XM3 1613000024



90° RCA male - RCA female Set

90° RCA male - RCA female

Type:
AC-A-RMF-90 1613000032



RCA male (SET of 2)

RCA Cinch plug female gold - SET

Type:
AC-C-RFG/SET 1613000029



XLR male 3-pin

XLR 3-pin male

Type:
AC-C-X3M 1613000019



Jack 6,3 mm /male / stereo

Jack male 6,3mm stereo

Type:
AC-C-J6S 1613000023



Speaker male/ 4-pin

Speaker plug male / 4-pin

Type:
AC-C-SP4 1613000021



XLR - 90° / male 3-pin

90° XLR 3-pin male

Type:
AC-C-XM-90 1613000034



LIGHTING CONTROLLERS



MYDMX 3.0

New Features

- Play multiple scenes at a time
- Arrange scenes into groups
- Sound-light with BPM audio analysis and pulse analysis
- Live snapshots
- Live scene dimming and scene speed controls
- Stand Alone backup memory
- BPM tap
- Flash scenes
- Blind editing - edit scenes without outputting the DMX
- Fully compatible with myDMX 2.1 software
- Up to 10 universes when used in multiples
- Windows and Mac installers that will download the latest ssl library with an internet connection upon install.
- "Maintenance" application that installs with the program to check for component updates or new versions of the software.
- "Cloud search for profiles" Search for the latest and greatest fixture profiles from within the program itself, no more hunting through dropbox
- Improved multi Pan and Tilt support

Classic Features

- Easy-to-use DMX software
- 512 DMX Channels
- Extensive fixture profile library
- SSL2 Profile editor & support
- Drag and drop effects generator
- Works with simple scenes/steps
- Users can select multi select steps in a scene and modify a channel parameter without it interfering with the rest of the channels
- Vast optimizations and stability improvements for both Windows and Mac OS
- Not compatible with ARM based Windows tablets (only Intel)



CODE: I310000051

NEW!

MYDMX-RM

Specifications

19" Rack mount interface / stand alone DMX512 controller. Same features as myDMX 3.0 interface but with 512 stand alone channels and 16 direct access trigger buttons. Compatible with myDMX 3.0 software and more. Upgradeable features available at store.dmxsoft.com (Windows and OSX Mac compatible).

CODE: I310000101





AIRSTREAM DMX

Specifications

- Creates wireless bridge between your Wifi device and ADJ lighting products equipped with WiFly or wired DMX512
- Allows you to use your iPhone or iPad as a lighting controller using the Airstream DMX app
- Compatible with all ADJ WiFLY and Elation Efly products
- Magnetic bottom plate for temporary, quick and easy mounting to metal fixtures or objects.
- Quick lock bracket included.
- Up to 2500 wireless feet (open line of sight) when using other "EXR Extended Range" WiFLY products
- One transmitter can send to many receivers using the same radio channel
- 14 WiFly Channels
- 3-pin DMX Out
- Wireless Frequency: 2.4 GHz DSSS
- Power Supply: DC 9-12V
- Dimensions (LxWxH): 5" x 7" x 2.5" / 125 x 175 x 62mm
- Weight: 1 lbs. / 0.5 kg.

CODE: I226100318

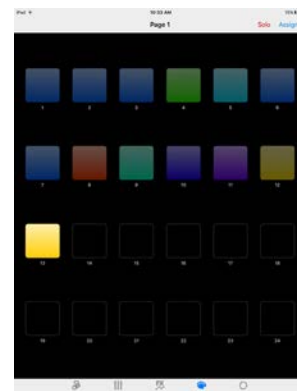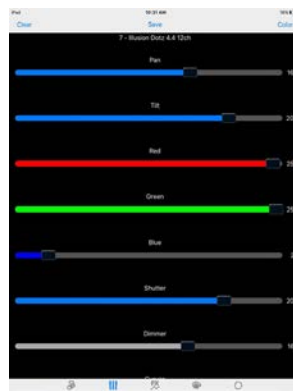


WIFLY NE1

Specifications

- 432 Channel DMX Controller with ADJ's WiFLY Transceiver Wireless DMX on-board.
- Control up to 12 individual fixtures
- Designed for controlling moving lights and LED Pars of any brand that consist of 34 DMX Channels or less
- Built-in effects generator for LED's and Moving Lights
- 12 Memories via 2 banks
- 4 Rotary Encoders for Channel & Function Control
- Master Dimmer Fader Control
- Strobe Rate Fader Control
- 6 Mode buttons (Fixture, Color, Gobo, Effect, Show, & Pause)
- 12 Multi-function buttons
- Blackout button
- Universal USB Port (USB Stick Included)
- DMX output connector: 3-pin XLR
- Power In: 9-12V DC min 300mA UL approved power supply (Included)
- Power consumption: 3.6 Watts
- Dimensions (LxWxH): 12.8" x 7.25" x 2.75" (325 x 185 x 68.7mm)
- Weight: 4.4 lbs. (2 kgs.)

CODE: I226100296

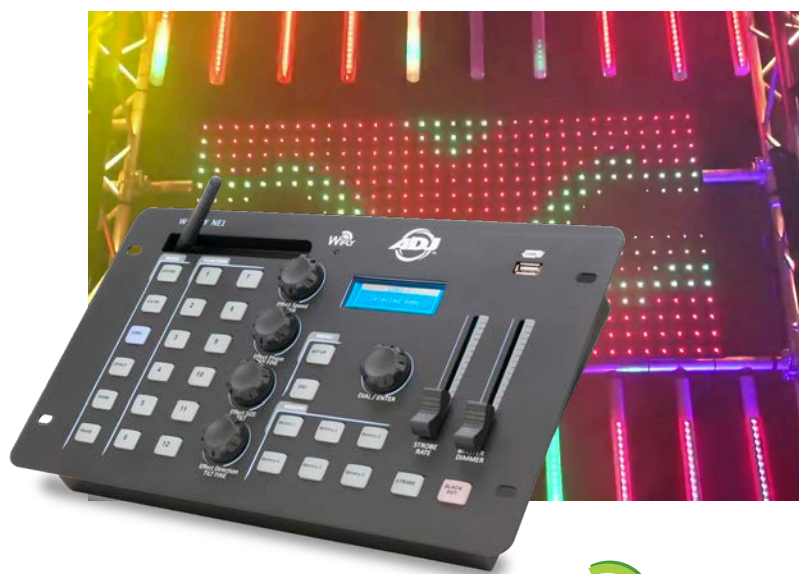

MyDMX BUDDY

MyDMX Buddy is a scaled down, more economical version of myDMX 2.0. Out of the package, myDMX software will run in limited mode (No 3D visualizer, Easy Remote or Midi features). However, these features plus other upgrades can be purchased at www.dmxsoft.com.

Specifications

- For use with any DMX512 compatible fixture
- Easy Setup, Programming and Playback
- Upgrades available at dmxsoft.com
- Fixture Library Includes over 10,000 Fixture profiles from over 500 Manufactures
- Compatible with myDMX 2.0. For PC & Mac
- 256 DMX Channel, Software based, Control System
- Compatible with Mac OS and Windows, 32 & 64-bit (XP,Vista, 7 & 8)
- 1-Year Limited Warranty
- Dimensions (LxW): 3" x 1" / 75 x 18mm

CODE: I31000030

MyDMX Buddy Includes:

- USB / DMX Interface
- USB Cable



Mini USB port located at the bottom



D6 BRANCH

Specifications

The D6-Branch is a 6-way DMX-Splitter that can be directly mounted onto truss with its integrated Velcros or by clamp.

- 6-way DMX Splitter/Booster
- Can be mounted directly onto truss
- 1 x 3-pin DMX In/Out on the Front
- 6 x 3-pin DMX Out on the rear side
- IEC power connector
- On/Off Switch

CODE: I32100062




SDC-6 FADERDESK V2 BLACK

Specifications

- No Confusing Configuration
- 6 Direct Channel Access Faders
- One Master Fader
- On/Off Switch
- Power Supply Included
- Compact and Lightweight
- Simple 6 Channel DMX Control
- 6 Individual Fader and One Masterfader
- 6 DMX Channels
- Very compact Design
- Easy Handling
- External Power Supply (9V DC/500mA)
- DMX Output: 3Pol (2+,3-/2-,3+)
- Weight: 0,8kg

CODE: 1236100095

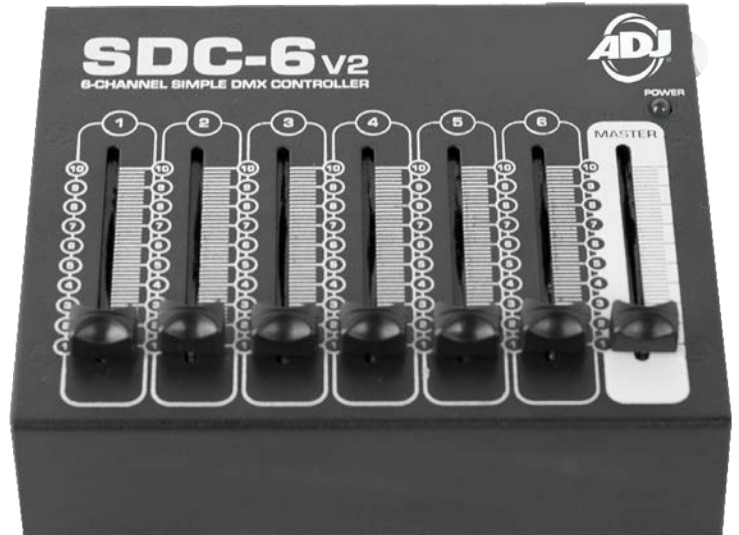

DMX OPERATOR 384

Specifications

- 384 total DMX Channels
- 12 fixtures x 32 channels each
- 8 channel faders x 4 channel banks
- Individual Speed & Fade Time faders
- 30 memory banks x 8 programmable scenes per bank
- 12 programmable chases, 240 steps per chase
- Assignable fade setting
- Manual control chase override
- Built-in microphone or line level input for audio triggering
- MIDI controllable
- Optional foot controller for chase step activation
- Onboard fog machine trigger button
- 7-segment LED display
- Ships with standard joystick module- optional jog wheel module available



CODE: 1322000051





WiFLY RGBW8C



The WiFLY RGBW8C is a 64-channel RGB, RGBW, RGBA LED wireless DMX controller. It was designed to control any standard 3 or 4 channel group of LED fixtures where channel 1 is Red, channel 2 is Green, channel 3 is Blue and channel 4 is White or Amber. Up to 8 LED fixtures or fixture groups can independently be controlled via four fixture buttons. All LED fixtures or fixture groups must be set to run in DMX mode and be addressed four channels apart for independent control. The units control panel includes 9 direct access "Static Color/Chase" buttons, which contain pre-programmed Color presets and chase programs, 3 user programmable Color preset buttons, 4 multi function faders that control RGBW intensities on the fly, as well as chase program "Speed", chase program "FadeTime" and "Master Dimmer". There is also an array of 8 buttons used to select the operation mode, including RGB Fade, Auto Run, Color Macro, Chase, Sound Active, Strobe, Manual RGBW and Blackout modes. The WiFLY RGBW8C is one of the simplest and most versatile LED controllers available today. It's ideal for D.J.'s, night-clubs, lounges, bars and anyone that wants easy control of LED Par's, Bar's, Flood's or Panel's.

Specifications

- Compact DMX-512 controller for RGB, RGBW and RGBA LED fixtures.
- Up to 8 channels can individually be controlled per fixture button.
- Built-In Wifly Transceiver, which will allow you control all Wifly compatible light fixtures wirelessly. (Can also be hard wired via 3 pin DMX cables)
- Built in RGB Fade, Auto program, Color Macro, Chase Programs
- 16x Operating Frequencies
- 4 Faders for manual RGBW or RGBA 4 channel control
- 3 user programmable Color preset, direct access buttons
- 9 Color preset/Chase program direct access buttons
- Sound active mode via internal microphone
- Power consumption: 3.6 Watts
- Size: 13" x 5.75" x 2" (327 x 140 x 48mm)
- Weight: 3 lbs. (1.3 kgs.)

CODE: 1226100258



RGB3C IR

Specifications

- Compact DMX512 controller for RGB, RGBW and RGBA LED fixtures
- Control up to 8 individual fixtures or fixture groups
- 3 Manual RGB Faders
- 9 direct access static Color buttons
- 7 Static Colors
- 10 Chase Programs
- RGB and Auto modes
- Manual RGB intensity control mode
- Strobe Fader
- Blackout button
- ADJ LED RC2 Compatible (Sold Separately)
- DMX output connector: 3-pin XLR
- Power In: 9-12V 300mA (Included)
- Power consumption: 3.6 Watts
- Size: 8.7" x 5.5" x 2.5" (22 x 14 x 6.3cm)
- Weight: 1.8lbs. (0.8kgs.)

CODE: 1321000075



RGBW 4C IR

Specifications

- Compact DMX512 controller for RGB, RGBW and RGBA LED fixtures
- Control up to 8 individual fixtures or fixture groups
- 3 user programmable Color preset, direct access buttons
- 9 Color preset/Chase program direct access buttons
- Color Macro playback mode
- Manual RGBW intensity control mode
- RGB and Auto modes
- Sound active mode via internal microphone
- DMX output connector: 3-pin XLR
- ADJ LED RC2 Compatible (Sold Separately)
- Power In: 12VDC 500mA UL approved power supply (Included)
- Power consumption: 3.6 Watts
- Size: 12.9" x 5.5" x 1.9" (327 x 140 x 48mm)

CODE: 1321000076





SCENE SETTER

Specifications

- Conventional dimming console
- 24 total DMX Channels
- 4200 programmable Scenes- password protected
- 48 programmable Chases- password protected
- Single & Mix Chase functions
- Blind & Dark functions
- 24 individual channel faders
- 24 bump buttons
- A / B Master Faders
- Tap Sync button for speed / fade override
- Independent Speed & Fade control
- Full-On button for 100% momentary output to all 24 channels
- Bright LCD display
- Use in conjunction with the Elation: DP-DMX20L, CYBER PAK, UNI PAK, DP-415 or DP-640
- Audio input and built in microphone for music sync functions
- Audio level fader
- Fog Machine input and trigger button- compatible with MB-1000, Stallion, Vapor- Flow,
- Fog Storm-1200 & 1700
- Polarity switch (2-, 3+, / 2+, 3-)
- Midi In, Out & Thru connectors
- Power: 120V. / 12V DC, 500mA. (Included) *Also available in 220V
- Dimensions: 10.5"L x 19"W x 3"H
- Weight: 11 lbs

CODE: 1322000048



DMX OPERATOR I

Specifications

- 192 DMX channel moving light controller
- 12 fixtures- up to 16 channels each
- 240 programmable Scenes
- 6 programmable Chases- up to 99 steps each
- Built in microphone for music sync function
- Tap Sync button for speed / fade override
- Bright 4-segment LED display
- Fog Machine input and trigger button- compatible with MB-1000, Stallion, Vapor Flow,
- Fog Storm-1200 and Fog Storm-1700
- Polarity switch (2-, 3+, / 2+, 3-)
- Midi input
- One DMX 3-pin XLR output
- Power supply: 120V. / 9-12V DC, 220mA. (Included) *Also available in 220V
- Dimensions: 5.25"L x 19"W x 2.5"H (Occupies 3 rack spaces)
- Weight: 5 lbs

CODE: 1322000046



MIDICON 2

Specifications

- USB Powered
- Tactile Spring Loaded Buttons
- Midi Mapper Software
- (6) General Purpose Buttons
- (1) Master and (8) Control 100mm Faders
- (16) Playback Page Buttons Above Faders
- (8) Rotary Dials with Push-In Selection Above Faders
- (8) Dual Color Feedback LEDs Above Faders
- (1) Blackout Button
- (32) Instant Effects or Scene Calling Buttons
- (8) Bump / Momentary Effect Buttons
- (4) Rotary Encoder Wheels with Push-In Selection
- USB Input for Gooseneck Work Light (not included)
- Removable Outer Case for 6U Rack Mounting
- 6U Rack Mount Kit Included
- Kensington™ Security Device Slot

CONTROL / CONNECTIONS

- (6) General Purpose Buttons
- (1) Master and (8) Control 100mm Faders
- (16) Page Playback Buttons Above Faders
- (8) Rotary Dials with Push-In Selection Above Faders
- (1) Blackout Button
- (32) Instant Effect or Scene Calling Buttons
- (8) Bump / Momentary Effect Buttons
- (4) Rotary Encoder Wheels with Push-In Selection
- USB 2.0 Type "B" Port

SIZE / WEIGHT

- Length: 20.2" (514mm)
- Width: 12.9" (328mm)
- Vertical Height: 3.6" (91mm)
- Weight: 15.0 lbs. (6.8 kg)

CODE: 1323000028

UC3 CONTROLLER

Specifications

- The UC3 provides easy-to-use control of various American DJ lighting fixtures
- Mode Selection: Different run modes, e.g. fast/slow, audio/manual/ auto, position, latch, etc., correspond to different functions
- Function Selection: Implements a wide variety of effects, like strobe,
- X/Y moving pattern selection, gobo/ Color changing, X/Y position
- setting, etc. Functions vary with different fixtures
- Cable length: Approx. 32 ft. / 9.75 m
- Connection: 1/4 Stereo plug
- Dimensions: 3.54"x2.36"x.78" / 90x60x20mm
- Weight: 1 lbs. / .45 kgs.

CODE: 1321000046

UC3 Series easy-to-use lighting controllers are compatible with the following ADJ lighting fixtures:

Inno Roll HP, Inno Scan HP, Quad Phase HP, SP-1500 DMX, Sweeper Beam Quad,



UNI PAK-MKII

Specifications

- Compact, 1 channel Dimmer/ Switch Pack
- On-board and external HTP (Highest Takes Precedence) slider
- Standard DMX-512 protocol
- Dim preset - Dim limiter settings
- LED display makes it easy to set DMX Channels
- 3 pin XLR In/Out
- Two standard AC 3-prong Edison plugs
- Easy to use mounting bracket
- Maximum power: 10A
- Dimensions (LxWxH): 7.25" x 3.625" x 2.625" / 184x92x92mm
- Weight: 3 lbs. / 1.3 kgs.

CODE: 1330000003





ADJ LED RC

Specifications

- Black Out: Turns fixture On/Off
- Auto Run: Automatically run through built-in programs
- Program Selection: Access units built-in programs
- Flash: Strobe effect
- Speed: Control speed of Auto Run
- DMX Mode Select
- Sound Active: Activates sound active mode
- Slave: Designates the fixture as a "slave" fixture in the Master/Slave configuration
- Set Address: Set DMX Address on a fixture
- RGB Buttons: Adjust RGB Colors with the "+" and "-" buttons
- + and - Buttons: Adjust flash rate, speed of the Auto Run and Program Selection

CODE:
1321000061



ADJ RFC

Specifications

- Black Out: Turns fixture On/Off
- Auto Run: Automatically run through built-in programs
- Program Selection: Access units built-in programs
- Flash: Strobe effect
- Speed: Control speed of Auto Run
- Sound Active: Activates sound active mode
- RGB Buttons: Adjust RGB Colors with the "+" and "-" buttons
- + and - Buttons: Adjust flash rate, speed of the Auto Run and Program Selection

CODE:
1223200026



ADJ LED RC2

Specifications

- Black Out: Turns fixture On/Off
- Program Selection: Access units built-in programs
- Flash: Strobe effect mode
- Speed: Activates the speed control of programs
- DMX Mode Select
- Sound Active: Activates sound active mode
- Slave: Designates the fixture as a "slave" fixture in the Master/Slave configuration
- Set Address: Set DMX Address on a fixture
- RGBAW Buttons: Adjust RGBAW Colors with the "+" and "-" buttons
- + and - Buttons: Adjust flash rate speed, program speed, sound sensitivity and program selection

CODE:
1226200027



ADJ DOTZ TPAR SYSTEM RF

Specifications

- Black Out: Turns fixture On/Off
- Fade: Fades current Color gradually
- Color: cycles through preset Colors
- Program Selection: Access units built-in programs
- Auto Run: automatically cycles through built in programs
- Sound Active: Activates sound active mode
- Light 1 & 2 On/Off: Turns fixtures on/off (currently functions with the Dotz TPar System only)
- + / - adjusts fade, Colors, sound sensitivity and program selection

CODE:
1223200036



ADJ LED RC3

Specifications

- Black Out: Turns fixture On/Off
- Auto Run
- Program Selection: Access units built-in programs
- Flash: Strobe effect mode
- Speed: Activates the speed control of programs
- DMX Mode Select
- Sound Active: Activates sound active mode
- Slave: Designates the fixture as a "slave" fixture in the Master/Slave configuration
- Set Address: Set DMX Address on a fixture
- Dimming Buttons: Adjust (WW, CW, A) Colors with the "+" and "-" buttons. + and - Buttons: Adjust flash rate speed, program speed, sound sensitivity and program selection

CODE:
1226200046



ADJ UV IR

Specifications

- IR Remote Button: Turns Fixture On/Off
- Strobing Speed: Controls the strobing speed of the UV Fixture

CODE:
9900007217



ADJ UC IR

Specifications

- Stand By: Black Out
- Full On: Turns all lights on
- Fade/Gobo: Activates fade function or Cycles through gobos
- Dimmer +: Increases dimming time
- Strobe: Activates Strobe effect
- Colors: Cycles through Color
- Dimmer -: Decreases dimming time
- Sound On: Activate Sound Active mode
- Show: Activates Built-in Programs
- Sound Off: Turns off Sound Activity mode

CODE:
1321000074



ADJ DOTZ PAR RF

Specifications

- Black Out: Turns fixture On/Off
- Fade: Fades current Color gradually
- Color: cycles through preset Colors
- Program Selection: Access units built-in programs
- Auto Run: automatically cycles through built in programs
- Sound Active: Activates sound active mode
- + / - adjusts fade, Colors, sound sensitivity and program selection

CODE:
1223200035

Visit us at www.ADJ.eu for additional product info | Specifications are subject to change without notice

AMERICAN AUDIO®



Helping You Achieve the Next Level.

ELS GO 8BT

Battery power speakers with Bluetooth

CODE: 1161350014

Powerful, Portable ELS-GO-8BT can play anywhere, whether there is power available or not. The internal rechargeable battery lets you have great sound anywhere. Whether you are doing a presentation, playing music outdoors, or using it to as your background system as you play your favorite instrument or sing your favorite song. Perfect for rentals or production as well as extending the boundaries of any event. USB/SD and Bluetooth inputs allow you to have all the music at your fingertips. The ELS-GO-8BT is the perfect companion when you need great sound and do not have AC Power. ELS-GO-8BT- the possibilities are limitless.

FEATURES

- Lightweight, battery powered speaker with Blue tooth
- 8" USB Active speaker specifically designed for the DJ and rental market.
- Extremely high efficiency design with low power consumption and plenty of output power for those small, mid level parties.
- Microphone input (XLR+Jack) and volume control great for when you want to use it for a small PA speaker.
- Line inputs
- Line Outputs
- Master Volume control
- Bluetooth
- USB/SD Playback



ELS GO 15BT

Battery power speakers with Bluetooth

CODE: 1161350013

Powerful, Portable ELS GO 15BT can play anywhere, whether there is power available or not. The internal rechargeable battery lets you have great sound anywhere. Whether you are doing a presentation, playing music outdoors, or using it to as your background system as you play your favorite instrument or sing your favorite song. Perfect for rentals or production as well as extending the boundaries of any event. USB/SD and Bluetooth inputs allow you to have all the music at your fingertips. The ELS GO 15BT is the perfect companion when you need great sound and do not have AC Power. ELS GO 15BT- the possibilities are limitless.

FEATURES

- Lightweight, battery powered + Bluetooth
- 15" USB Active speaker specifically designed for the DJ and Rental Market.
- Extremely High Efficiency design with low Power consumption and plenty of output power for those small, mid level parties.
- Bi-amp Amplifier with 1 x amp powering the Titanium Driver and 1 x amp for 15" woofer with magnet.
- Microphone input (XLR+Jack) and volume control great for when you want to use it for as a small PA speaker.
- Line inputs XLR + RCA
- Line Outputs XLR+Jack
- Master Volume control





VLP2500 power amplifier

CODE: 1141000012

SPECIFICATIONS

- Output Power:
 - 1100W RMS Per Channel @ 4 Ohms, 1kHz, 0.1% THD
 - 700W RMS Per Channel @ 8 Ohms, 1kHz, 0.1% THD
- Bridge Mode, Mono
 - 2200W RMS @ 8 Ohms, 1K Hz, 1% THD
- Total Harmonic Distortion: Less Than 0.5% (20Hz - 20kHz @ 8 Ohms)
- Frequency Response: (+/-0.1db, @rated output Power, 8 Ohms): 20Hz - 20K Hz
- Slew Rate: 20V Per usec
- Damping Factor: @ 8 Ohm: >450
- Impedance: 20 K Ohms balanced / 10 K Ohms unbalanced
- Cooling System: 2 individual fans (various speed)
- Special Features: High/Low Pass Filter/Input, Soft Start Sensitivity Selector/Ground Lift
- Output: Speaker + Binding post
- Dimensions (LxWxH): 453 x 482 x 88mm 2-rack mount space
- Weight: 22,6kg



VLPI500 power amplifier

CODE: 1141000011

SPECIFICATIONS

- Output Power:
 - 675W RMS Per Channel @ 4 Ohms, 1kHz, 0.1% THD
 - 450W RMS Per Channel @ 8 Ohms, 1kHz, 0.1% THD
- Bridge Mode, Mono
 - 1400W RMS @ 8 Ohms, 1K Hz, 1% THD
- Total Harmonic Distortion: Less Than 0.1% (20Hz - 20kHz @ 8 Ohms)
- Frequency Response: (+/-0.1db, @rated output Power, 8 Ohms): 20Hz - 20K Hz
- Slew Rate: 15V Per usec
- Damping Factor: @ 8 Ohm: 300
- Impedance: 20 K Ohms balanced / 10 K Ohms unbalanced
- Cooling System: 2 individual fans
- Special Features: High/Low Pass Filter / Input Sensitivity Selector / Ground Lift; Limiter
 - build in clip limiter
- Input: XLR 3pin + Jack 6,3mm
- output: Speaker + Binding post
- Dimensions (LxWxH): 360 x 482 x 88mm 2-rack mount spaces
- Weight: 42 lbs. / 19 Kgs.



VLPI1000 power amplifier

CODE: 1141000013

SPECIFICATIONS

- Output Power:
 - 500W RMS Per Channel @ 4 Ohms, 1kHz, 0.1% THD
 - 330W RMS Per Channel @ 8 Ohms, 1kHz, 0.1% THD
- Bridge Mode, Mono
 - 820W RMS @ 8 Ohms, 1K Hz, 1% THD
- Total Harmonic Distortion: Less Than 0.1% (20Hz - 20kHz @ 8 Ohms)
- Frequency Response: (+/-0.1db, @rated output Power, 8 Ohms): 20Hz - 20K Hz
- Slew Rate: 15V Per usec
- Damping Factor: @ 8 Ohm: 300
- Impedance: 20 Ohms balanced / 10 Ohms unbalanced
- Cooling System: 2 individual fans
- Special Features: High/Low Pass Filter / Input Sensitivity Selector / Ground Lift; Limiter
 - build in clip limiter
- Input: XLR 3pin + Jack 6,3mm
- output: Speaker + Binding post
- Dimensions (LxWxH): 360 x 482 x 88mm 2-rack mount spaces
- Weight: 15 Kgs.



VLP600 power amplifier

CODE: 1141000010

SPECIFICATIONS

- Output Power:
 - 300W RMS Per Channel @ 4 Ohms, 1kHz, 0.1% THD
 - 200W RMS Per Channel @ 8 Ohms, 1kHz, 0.1% THD
- Bridge Mode, Mono
 - 600W RMS @ 8 Ohms, 1K Hz, 1% THD
- Total Harmonic Distortion: Less Than 0.1% (20Hz - 20kHz @ 8 Ohms)
- Frequency Response: (+/-0.1db, @rated output Power, 8 Ohms): 20Hz - 20K Hz
- Slew Rate: 15V Per usec
- Damping Factor: @ 8 Ohm: 300
- Impedance: 20 Ohms balanced / 10 Ohms unbalanced
- Cooling System: 2 individual fans
- Special Features: High/Low Pass Filter / Input Sensitivity Selector / Ground Lift Limiter
 - build in clip limiter
- Input: XLR 3pin + Jack 6,3mm
- output: Speaker + Binding post
- Dimensions (LxWxH): 360 x 482 x 88mm 2-rack mount spaces
- Weight: 33 lbs. / 15 Kgs.



VLP300 power amplifier

CODE: 1141000009

SPECIFICATIONS

- Output Power:
 - 150W RMS Per Channel @ 4 Ohms, 1kHz, 0.1% THD
 - 100W RMS Per Channel @ 8 Ohms, 1kHz, 0.1% THD
- Bridge Mode, Mono
 - 300W RMS @ 8 Ohms, 1K Hz, 1% THD[^]
- Total Harmonic Distortion: Less Than 0.1% (20Hz - 20kHz @ 8 Ohms)
- Frequency Response: (+/-0.1db, @rated output Power, 8 Ohms): 20Hz - 20K Hz
- Slew Rate: 15V Per usec
- Damping Factor: @ 8 Ohm: 260
- Impedance: 20 Ohms balanced / 10 Ohms unbalanced
- Cooling System: 2 individual fans
- Input: XLR 3pin + Jack 6,3mm
- output: Speaker + Binding post
- Dimensions (LxWxH): 336 x 482 x 44mm 1-rack mount space
- Weight: 24 lbs.(11kg)




NEW

DB DISPLAY MKII

19-inch all metal rack mountable LED dB level display & amp rack lighshow
CODE: 1151800005

SPECIFICATIONS

- Designed to set in an amp rack to view your decibel level
- Creates a great light show in your amp rack
- Display progresses from green through amber to red
- Sensitivity adjustment on both left and right channels
- 2 separate modes: dot and bar
- Includes 5V power supply
- Line Inputs: Left & Right RCA



- Heavy Duty Metal/ Chassis
- Line Outputs: Left & Right RCA
- Voltage Operation: DC 5V, 500mA Power Supply included
- Dimensions: (LxWxH): 19" x 1.75" x 1.75" / 44.5mm x 483mm x 44.5mm
- Weight: 2.5 lbs. / 1.25kg.

NEW

UCD-100 MKIII

CODE: 1115000009

MAIN FEATURES

- 19-inch rack mount single CD/MP3 Player
- Plays MP3, CD, CD-R and CD-RW discs
- Record function and Line In RCA's that allows either to record tracks from an inserted CD or an external mix via Line In RCA's
- LCD Display shows track name when a MP3 disc is played
- Includes Infrared Remote Control with volume control + other features
- 2 USB music inputs (1 on front, 1 on rear) for external music sources (hard drive, MP3 Players, Thumb Drives, SD Cards with adapters)
- XLR Balanced Output on rear - send audio signal directly to Powered Speakers
- RCA In & Outputs
- Seamless Loop
- Auto & Manual BPM Counter
- +10 track advance button
- Mechanical Anti Skip Protection
- Quick MP3/CD recognition



- Pitch (CD Source): Hyper Pitch (+/-4%, +/-8%, +/-16%, +/-100%)
- Pitch (MP3 Source): (+/-4%, +/-8%, +/-16%)
- Tempo Lock
- Bright LCD display
- Single/Continue Mode and Time Remaining/Time Gone-By Viewing
- Frame search
- Jog Wheel – control
- Antishock 20 sec
- Power consumption: 13W
- Includes American Audio Database Builder Program (PC Only – See user manual for hardware requirements)
- Multi-voltage Power Supply: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 482x271x89mm (2-space)
- Weight: 4.35kg.

Media Operator BT

all-in-one MP3/Bluetooth media player

CODE: 1112000005

MAIN FEATURES

- SD Card* / USB 2.0 / Bluetooth full functioning MP3 Player
- Track Time Display
- Track Search Buttons
- Easy-to-use
- Bright LCD Display
- Reads SD/SDHC cards up to 32GB
- Up to 1000 MP3 songs on a 1G SD Card** (MP3 recorded at 128bit rate**)
- 4x RCA line Inputs and 1x 35mm Auxiliary Jack Input
- 1x RCA, 1x L/R Unbalanced 1/4" Jack, 1x L/R Balanced XLR Outputs
- Master music output volume control
- Individual EQ Treble / EQ Bass control for Music



- Combo Mic input: 1/4" jack and XLR
- Master mic output volume control
- Individual EQ Treble / EQ Bass control for Mic
- Voltage Selector Switch: 115V or 230V 50/60Hz
- Dimensions (L x W x H): 19" x 4" x 1.75" in. / 483 x 193 x 44 mm (1 rack space)
- Weight: 4 lb. / 1.7 kg.

*SD Card is not Included

**Capacity may vary

XEQ-152B Equalizer

CODE: 1151100001

SPECIFICATIONS

- Input type: Active balanced / Unbalanced
- Output Impedance: <150 Ohms Input Max: (2k Ohms) +26dBu (bal.), +21dBu (unbal.) - (600 Ohms) +22dB (bal.), +15dB (unbal.)
- Input Max: +26dBu (bal.), +21dBu (unbal.)
- Output type: Servo-Balanced
- Source Impedance: 20k Ohms (bal.), 15k Ohms (unbal.)
- Min. Output Load Impedance: 600 Ohms
- Max Output Level: 22dBm
- Connectors: 1/4 phone jack, XLR & RCA phono (unbal.)
- Frequency Resp.: 20Hz-20kHz, +/-0.5dB
- Total Harmonic Distortion: <.01 +10dBu
- IM Distortion: .005
- Channel Separation: 50dB @ 1KHz
- Gain Control: - infinity to +60dB
- Filter Type: Constant Q
- Low Cut Filter: 25Hz / 12dB oct
- High Cut Filter: 3K / 12dB oct
- Range: +/- 6dB or +/- 12dB (selectable)
- S/N Ratio: 101dB below max



BL-40

CODE: 1152200011

The American Audio BL-40 closed back headphones feature a 40mm driver unit for tight clean and loud music reproduction. With a 10Hz-22KHz frequency response, you'll be sure to get the most from your sound source.



FEATURES:

- Comfortable on-ear cushions
- 2x Detachable headphone cables
- 3M coiled cable
- 1M straight cable with mic + volume control
- Carrying Bag
- 1/4" Phone Plug
- Adjustable headband
- Folds up for easy storage

TECHNICAL SPECIFICATIONS:

- Driver unit: 40mm
- Impedance: 32 ohm +/- 15%
- Sensitivity: 104 +/- 3dB
- Frequency Response: 10Hz~22KHz
- Weight: 195g +/- 10g



BL-60

CODE: 1152200012

The American Audio BL-60 on ear headphones feature a 40 mm driver unit with a 10Hz-22KHz frequency response for full, rich and loud music reproduction. Comfortable, loud and punchy sound reproduction is what make the BL-60 ideal for live sound monitoring and can be used anywhere you need the extra volume but still want clean clear highs and tight bass response.



FEATURES:

- Comfortable on-ear cushions
- 3x Detachable headphone cables
- 1M straight cable (mini to mini jack)
- 3M coiled cable (mini to mini jack)
- 3M straight cable (mini to mini jack)
- Carrying Bag
- 1/4" Phone plug adapter
- Adjustable headband
- Folds up for easy storage

TECHNICAL SPECIFICATIONS:

- Technical Specifications:
- Driver unit: 40mm
- Impedance: 32 ohm +/- 15%
- Sensitivity: 102 +/- 3dB
- Frequency Response: 10Hz~22KHz
- Weight: 195g +/- 10g



WM-219

CODE: 1153100008

NEW

WHAT'S INSIDE:

- 2x Hand Held Wireless Microphones (AA batteries not included)
- 2x Microphone Colored Rings
- 1x 2-Channel UHF Wireless Receiver
- 2x Detachable UHF Antennas
- 1x Power Cable
- 2x Rack Ears to mount in 19-inch rack mount

PERFORMANCE:

- Wireless Range: 300 ft. (90M) line of site*
- Battery life with full charge: 6-10 hours
- Frequency Range: UHF 863-865MHz
- Dynamic Range: >98dB

- Total Harmonic Distortion: <1
- Frequency Response: 50HZ ~ 14KHz 3dB
- Signal to Noise Ratio: >85dB
- Audio Output Level: 0-300mV (Balanced: 0-2V)
- Transmitting Power: +10sBM
- *Actual wireless range will depend on RF signal absorption and interference

DIMENSIONS / WEIGHT:

- Receiver Dimensions (LxWxH): 16.5"x9"x1.75"/420x230x45mm
- Receiver Weight: 1.5 lbs. / .68kg.



VPS SERIES

The American Audio VPS Series microphones were designed with singers, MC's and anyone who wants a good quality mic at a fair price in mind. Each VPS series mic has been acoustically tailored to outperform competitively priced microphones. From the least expensive VPS-20 to the VPS-80, our mics feature Cardioid and Supercardioid patterns for better feedback rejection while still retaining crystal clear audio properties in order to achieve higher gain levels before feedback. Great care has also been taken when designing the mic capsule, suspension and the barrel in order to help minimize handling noise while still remaining ergonomically comfortable and attractive.



VPS-20


CODE: 1153100007

SPECIFICATIONS

Freq Response - 50Hz - 15KHz

- Cardioid Pattern for exceptional gain before feedback
- Designed for clear vocals and reduced handling noise
- Engineered to be versatile and robust in live situations

Includes: Mic clip and 1/4 to XLR cable

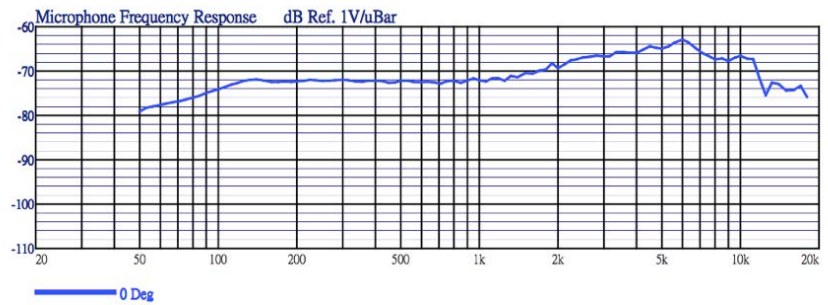

VPS-60


CODE: 1153100006

SPECIFICATIONS

Freq Response - 50Hz - 18KHz

- Super Cardioid for superior gain before feedback
- Engineered to better control the proximity effect
- Minimizes handling noise without compromising sound quality

Includes: Mic clip, mic bag, XLR-XLR mic cable

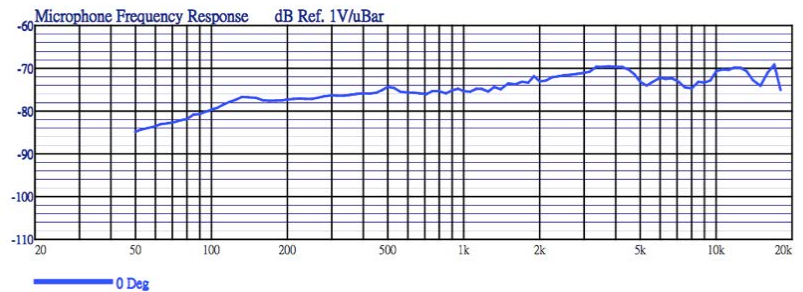

VPS-80


CODE: 1153100005

SPECIFICATIONS

Freq Response - 50Hz - 18KHz

- Super Cardioid for superior gain before feedback
- Ultra-smooth frequency response for great live or studio applications
- Floating capsule suspension for greatly reduced handling noise

Includes: Mic clip, mic bag, XLR-XLR mic cable

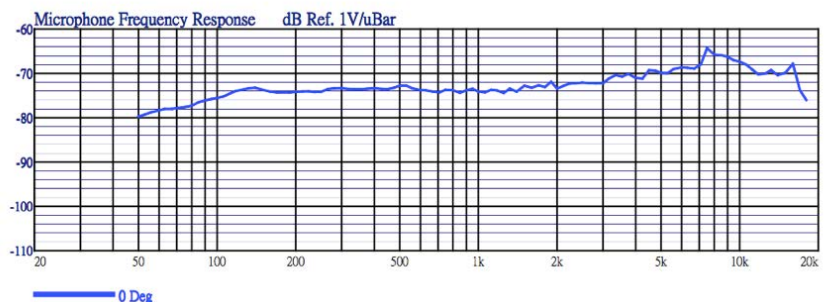

SPSX2B

CODE: 116300012

Two universal ACCU STAND stands in a carry bag

SPECIFICATIONS

- Heavy Duty Speaker Stands
- Weight capacity: 80 lbs. / 36 kgs.
- Includes socket mounting bracket to attach to speaker
- Recommended maximum height: 6 ft.
- Pipe Diameter: 1.38" in. / 35mm
- Weight: 6 lbs. / 3.75 kgs

Whats Included:

- 2x SPS1-B Speaker Stands
- 1x Carry Bag



SAT-1 distance rod

CODE: 1163900005

SPECIFICATIONS

- Distance rod for Subwoofer
- Pipe diameter: 35mm Max
- Length: 1,25m
- Min. length: 0,82m
- Max. Load: 30kg
- Color: black



SAT-2 distance rod

CODE: 1163900007

SPECIFICATIONS

- M 20 threaded Base
- Pipe diameter: 35mm
- Max length: 1,25m
- Min length: 0,82m
- Max. Load: 30kg
- Color: black



TTS Table Top Stand

CODE: 1154000009

FEATURES

- Rubberized bearing area
- Adjustable in height
- Color: black
- Material: metal
- Height: 165-225mm
- Width: 235mm
- Weight: 2,5 kg



USB LITE

USB gooseneck light

CODE: 1154000022



FEATURES

- LONG LIFE L.E.D. Goose neck light
- For use in all Elation controllers with USB light plug.
- Can be used with any standard USB products

Mini LED

Gooseneck lamp BNC

CODE: 1154000019



FEATURES

- Fits BNC connectors.
- Extreme long life through LED technology.
- Very low Power consumption.
- Produces nearly no heat.
- LED head exchangeable.
- Length: 37cm
- DC 12V max 70mA

Mini LED

Gooseneck lamp XLR

CODE: 1154000020



FEATURES

- Fits XLR connectors.
- Extreme long life through LED technology.
- Very low Power consumption.
- Produces nearly no heat.
- LED head exchangeable.
- Voltage: 12V DC
- Power: max. 70 mA
- Length: 39cm

NEW

PRO EVENT TABLE II

- Professional Event Table to use as a greeting table, sales table, live sound or lighting designer console or DJs
- Compact and collapsible to half of its width
- Lightweight, around 40 lbs.
- Functional and professional looking
- Dimensions (LxWxH): 50" x 24" x 45.5" / 1270x610x1155mm
- Tube Diameter 32mm
- Front board to add custom graphic (Size W x H : 25" x 22.5" / 635 x 571,5mm)



CODE: 1731000023

NEW

EVENT FACADE II BL/WH

FEATURES:

- Made out of strong and light weight black/white metal
- Includes black/white scrim
- Includes a carrying bag to store and keep facade scrim looking best
- Detachable hinges make it easy for storage
- Fire Retardant easy to remove scrim
- Scrim to be washed by hand in cold water, lay flat to dry.
- Do not twist to avoid deformation
- Dimensions (LxWxH):
110.25" x 1" x 47.25" / 2800 x 25.4 x 1200mm – Complete Stand
27.5" x 1" x 47.25" / 700 x 25.4 x 1200mm – Each Panel
49.75" x 30" x 5.5" / 1260 x 760 x 140mm - Bag
- Weight: 32 lbs. / 14.5 kgs.



CODE: 1731000024

CODE: 1731000025


EVENT FACADE SCRIMS (4PCS) WHITE/BLACK

White Scrims for Event Facade or Event Facade BL


- Set of 4 white scrims
- Dimensions each scrim (WxH) : 700x1200mm (extended)

Black Scrims for Event Facade or Event Facade BL

- Set of 4 black scrims
- Dimensions each scrim (WxH) : 700x1200mm (extended)



CODE: 1731000017




CODE: 1731000018

PRO-SHELF

NEW

Aluminum corner shelf for Pro Event Table II. Sold in Pairs

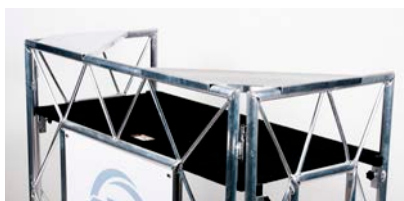

CODE: 1731000020

CODE: 1731000021

PRO-ETS

Pro Event Table II White Scrim including Transport bag.

CODE: 1731000027

PRO-ETSB

Pro Event Table II Black Scrim including Transport bag.

CODE: 1731000028

PRO-ETBS

PRO EVENT TABLE BAG II

Pro Event Table II Scrim including Transport bag.

NEW

PROEVENT IBEAM

- Aluminium I-Beam truss for the Pro Event Table and Pro Event Table II to hang lighting fixtures such as light weight par cans, wash fixtures, effect lights or small moving heads
- Includes hardware for mounting to the table
- Includes carry bag
- Use Duratruss Junior Clamp to hang lighting (clamps sold separately)
- Height: 87 inches (2.2M)
- Maximum load: 100 lbs. / 45 kg. (lighting fixtures should be evenly distributed)
- Collapsed size (LxWxH): 52" x 11.5" x 4.25" / 1320 x 290 x 110 mm
- Weight: 16 lbs. / 7 kg.



CODE: 1731000026



NOTES

pure LIGHTING
EXCITEMENT



AMERICAN AUDIO®



/americandj